

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

| | | | | | | | |
|-----|------|-----------|-----|-----------------|-----------|-----|------|
| LOC | DIST | REVISIONS | | | | | |
| GP | 00 | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | B | INITIAL RELEASE | 26AUG2015 | DM | DM |

NOTES:


1 EACH ITEM AND ASSEMBLY MUST COMPLY WITH EUROPEAN REDUCTION OF HAZARDOUS SUBSTANCES (RoHS) REGULATION. UNDER DIRECTIVE 2011/65/EU.

2 DO NOT SOLDER CONTACT, CRIMP ONLY

3 IDENTIFY POSITION PE, LOADING POSITIONER PE TO SOCKET PE

4 PE CONTACT CIRCUIT IDENTIFIED BY EXTENDED LENGTH POLARIZED "KEY"

5 ELECTRICAL TEST:
100% OPEN SHORT & MISS WIRE TEST
CONTACT RESISTANCE: 2 OHM MAX

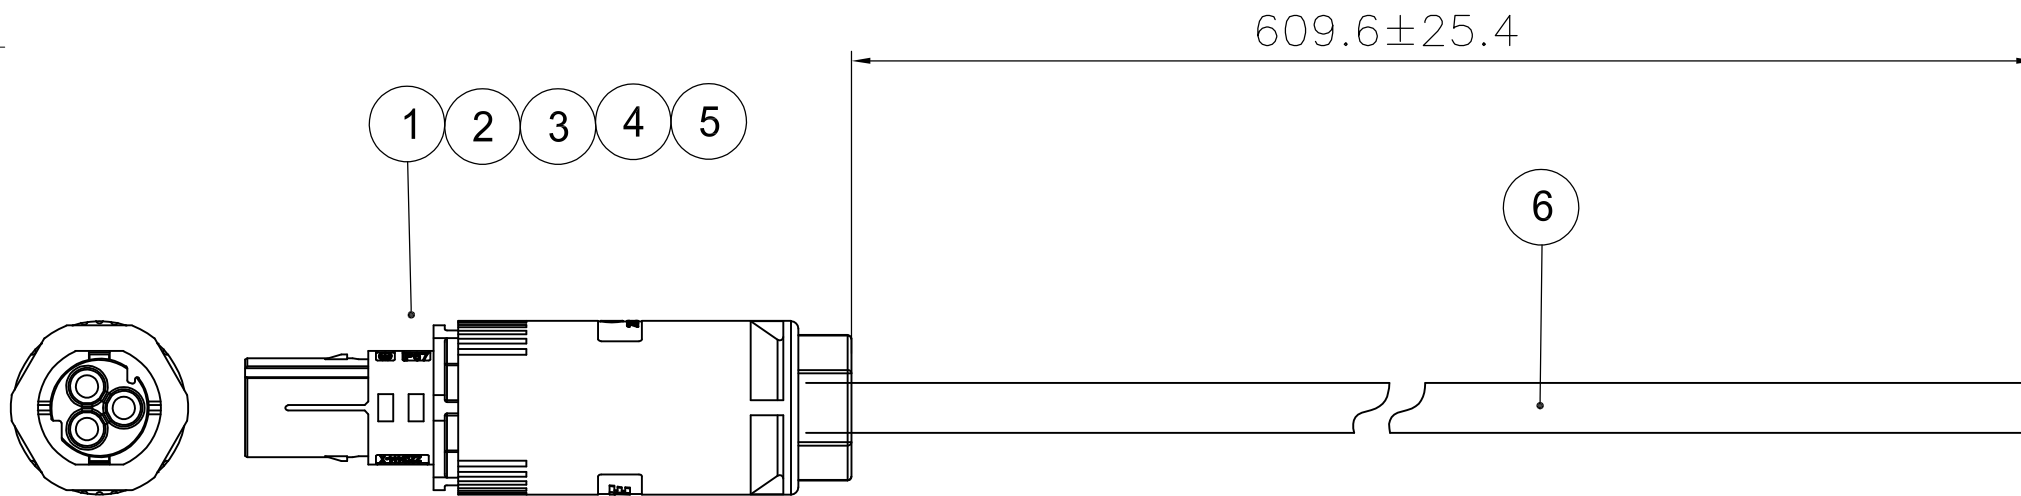

CONNECTOR 1

2829463-1
TE P/N

| WIRING SCHEME | |
|----------------------------|-------|
| CONNECTOR HOUSING (ITEM 1) | WIRE |
| PE/ | GREEN |
| N | WHITE |
| L | BLACK |

| | | | |
|-------|-----|---|------|
| 0.661 | M | Cable, SE00W, 14/3 Black, 13.74mm GENERAL CABLE 89073 | 6 |
| 1 | PC | Cable Ring Nut 11-14mm OD | 5 |
| 1 | PC | Cable Clamp/Seal Assembly 11-14mm OD | 4 |
| 1 | PC | Contact/Positioner Assembly | 3 |
| 3 | PC | Pin Contacts | 2 |
| 1 | PC | Pin Housing Assembly | 1 |
| QTY | UoM | DESCRIPTION | ITEM |

| | | | | |
|--|--|------------------------------------|----------------------------------|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN T.BURZYŃSKI 25MAY2015 | TE Connectivity | |
| DIMENSIONS: mm | | CHK A.V.ZANDVOORT 25MAY2015 | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD A.V.ZANDVOORT 25MAY2015 | NAME SEALED 3 POS PIN- STD UL | |
| 0 PLC ± 0,5 1 PLC ± 0,5 2 PLC ± 0,5 3 PLC ± - 4 PLC ± - ANGLES ± 2° | | PRODUCT SPEC - | APPLICATION SPEC - | |
| MATERIAL - | | FINISH - | WEIGHT - | RESTRICTED TO - |
| CUSTOMER DRAWING | | | SIZE A3 | CAGE CODE 00779 |
| SCALE NTS | | | DRAWING NO C-2829463 | REV B |
| SHEET 1 OF 1 | | | | |