

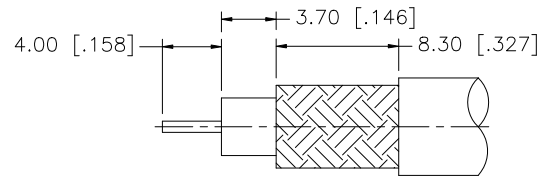



REV.	DATE	ECR NO.	DESCRIPTION
NC	05/01/04	—	INITIAL RELEASE
A	10/10/08	—	REVISE CONTACT PIN CRIMP NOTE (2)/ ADD CABLE DESCRIPTION

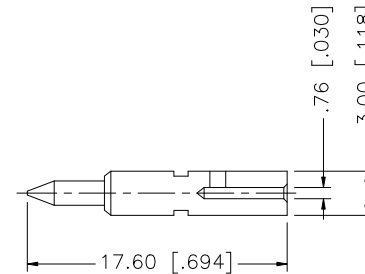

RECOMMENDED
CABLE STRIPPING DIM'S

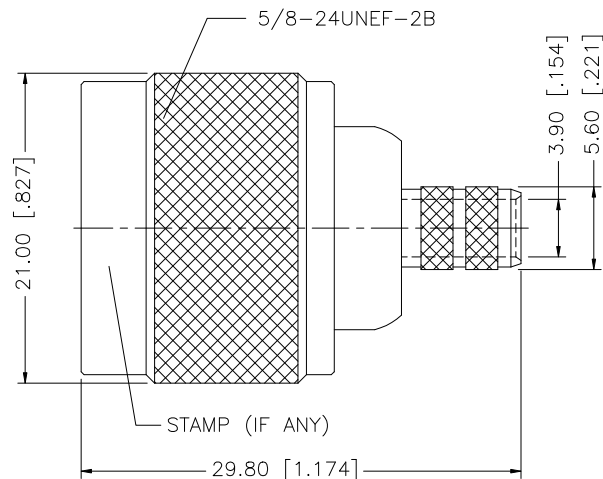

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.48]
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .100" [2.54] OR SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	10/10/08						
7						CHECKED								
6						ISSUED			PART DESCRIPTION N CRIMP PLUG (FOR RG–59/U CABLE)					
5						SHEET	1 OF 1							
4	FERRULE	COPPER	NEXCOTE	1		PART NO. 172101								
3	CONTACT PIN	BRASS	GOLD	1										
2	INSULATOR	PTFE	NATURAL	1		DWG. NO. 172101.DWG REV. A SIZE A SCALE NA								
1	BODY	BRASS	NEXCOTE	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										