
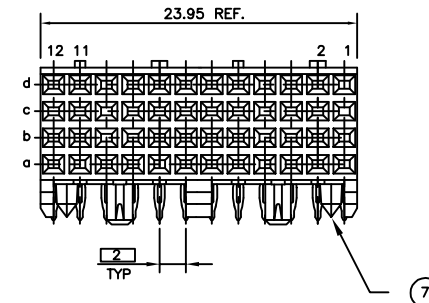


PRODUCT NUMBER	PCB THICKNESS	DIM "A"
88946-X02	1.6	2.90
88946-X12	2.4	3.53
88946-X02LF	1.6	2.90
88946-X12LF	2.4	3.53

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY/1YYLF	TELCORDIA CO
-2YY/2YYLF	CUSTOMER SPECIAL
-3YY/3YYLF	CUSTOMER SPECIAL

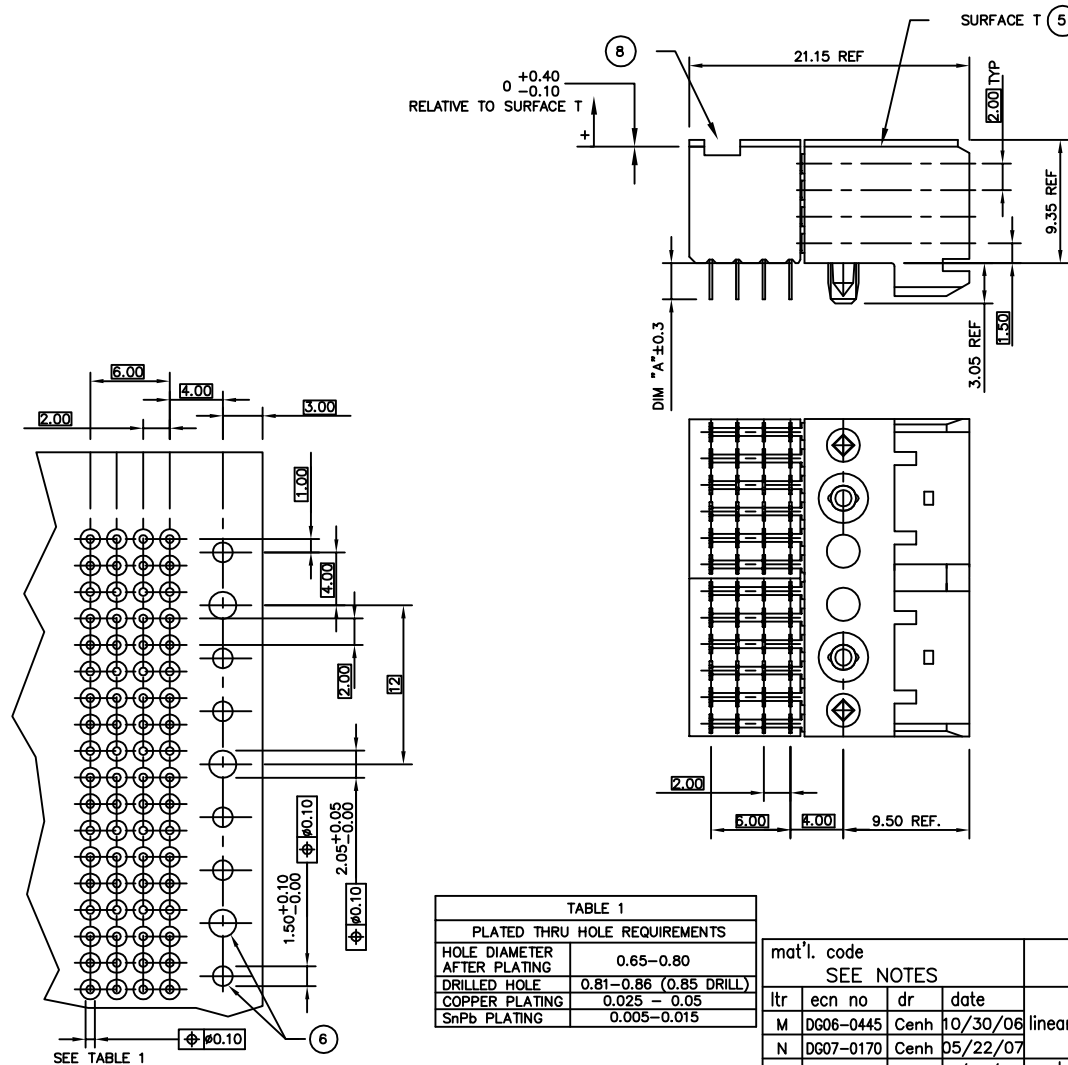

- NOTES:
- ① CONNECTOR MATERIALS:
HOUSING: LCP, 30% GLASS FILLED, UL 94-V0 COMPLIANT
PRESS BLOCK: GLASS FILLED, HIGH TEMPERATURE RESIN UL 94-V0 COMPLIANT
TERMINAL: PHOSPHOR BRONZE ALLOY
 2. PRESS-FIT TAIL PLATING: 0.5-1.5 μ m TIN LEAD
 3. PRODUCT SPECIFICATION:
GS-12-002
 4. APPLICATION SPECIFICATIONS:
BUS-20-061
GS-20-001
TA-941
 - ⑤ PRODUCT MARKING: (PART NUMBER & LOT CODE).
 - ⑥ INDICATED HOLES ARE UNPLATED.
 - ⑦ DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.
 - ⑧ TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
 9. THESE PRODUCTS WHERE THE PART NUMBER ENDS IN "LF" MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 240°C FOR 60 SECONDS IN A CONVECTION, INFAR-RED OR VAPOR PHASE REFLOW OVEN.
 - ⑩ FOR LEAD FREE PART NUMBERS ADD "LF" SUFFIX. EXAMPLE: 88946-XYLF.

HOLE DIAMETER AFTER PLATING	0.65-0.80
DRILLED HOLE	0.81-0.86 (0.85 DRILL)
COPPER PLATING	0.025 - 0.05
SnPb PLATING	0.005-0.015

mat'l. code SEE NOTES				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
litr	ecn no	dr	date	linear	.X ±.3	projection 	title B SERIES R/A SIGNAL RECEPT ASSY 4 ROW, 2 MOD, PF		
M	DG06-0445	Cenh	10/30/06		.XX ±.10				
N	DG07-0170	Cenh	05/22/07		.XXX ±.050				
P	DG08-0171	TER	8/15/08	angles	0° ±2°		product family METRAL (tm) size dwg no		
R	DG09-0068	Cenh	06/06/09	dr	S.STONER 10/29/92				
				enrg	R.DOUTRICH 10/29/92				
K	V05-0074	LP	4/12/05	chr	S.STONER 10/29/92	scale 1:1	A	88946	code 213
L	V05-0522	DAI	6/8/05	appd	S.STONER 10/29/92				sheet 1 of 1
sheet index		revision sheet		R 1					