

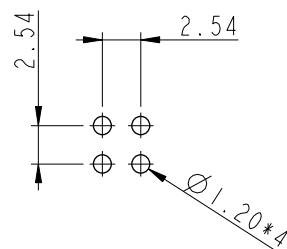



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8B0588	2008/10/30	Ivan	Update PCB layout tolerance
D	LEN1730305	2017/03/21	Ruru	Change Logo
E	CI90273	2019/02/22	Ruru	Modify Note







4 Pin Male Connector
Male Pin PCB Layout



Pin Assignments
Front View

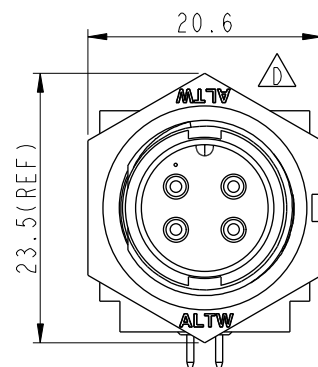

Recommended Panel Cut-out

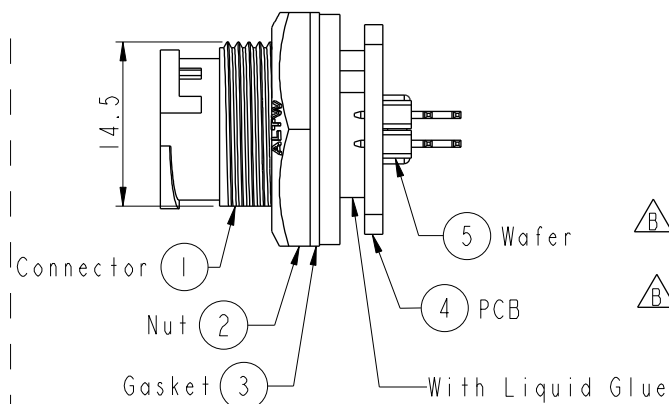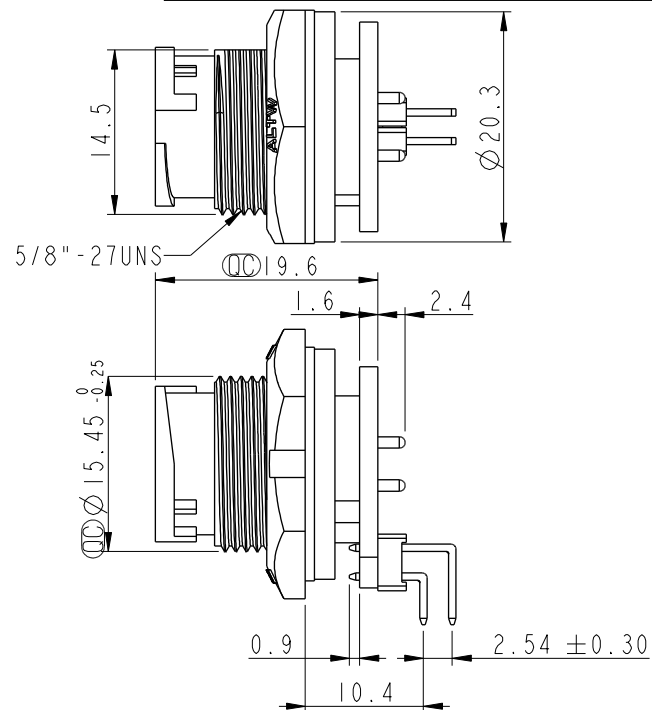

Note:

* Important Dimension To Check.

* Waterproof Rate: IP67, Unmated

* Housing: Thermoplastic, Black

* Pin: Copper Alloy, Gold Plated

* Nut: Thermoplastic, Black

* Gasket: Rubber, Black

* PCB: FR4 EPOXY Glass

* Wafer: PH=2.54 雙排, 90°

* Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 3.0mm

* Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.5mm

* Gasket and Nut are packed separately
in PE bags.

UNIT:mm			TITLE Circular Panel Lock 4Pin M Conn M Pin For R/A		
TOLERANCE	.X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 1:1	SIZE A4	SHEET 1	OF 1
REV.	E	WC-REV.	A.4	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	BD-04PMMR-LC7001	DRAWN BY	Ruru	DATE	2019-02-22
DWG NO	BD-04PMMR-LC7001	CHECKED BY	Rita	DATE	2019-02-22
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-02-22