



## T6633ST 5V 1A US Plugtop

## Features:

- For use with Arduino & BeagleBoneSmall & Compact US Plug design
- USA Fixed AC Head
- Level VI ErP/EuP efficiency compliant
- MTBF >50,000 hours
- 1 Year Warranty









Output Characteristics		
Part Number	T6633ST	
Voltage	+5V	
Current Max.	1A	
Current Min.	0A	
Power (watts)	5W	
Line Regulation	+/- 5%	
Ripple & Noise (mV p-p)	300 mVp-p Maximum	
Output Cord	Wire: 24AWG Jack plug: 5.5*2.1*12mm	

Input Characteristics		
Rated Input Voltage	100-240Vac	
Full Input Voltage Range	90-264Vac	
Rated Frequency	50-60Hz	
Full Frequency Range	47-63Hz	
Input Current	0.2A	
Input Plug	USA 2 Pin	

Safety, Mechanical and Other Characteristics		
Model Number	T6633ST	
Dimensions (LxWxH)	67mm X 26mm X 51mm	
Weight (Approx)	65g	
Leakage Current	0.25mA max	
Operating Temperature	0°C to 40°C	
Storage Temperature	-20°C to 60°C	
Operating Humidity	20% to 85%	
Storage Humidity	5% to 95%	
Safety Standard	UL	
EMI Standard	CE (EN55022)	
MTBF	50K Hours (mean time before failure)	




Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH.







## T6633ST Drawing

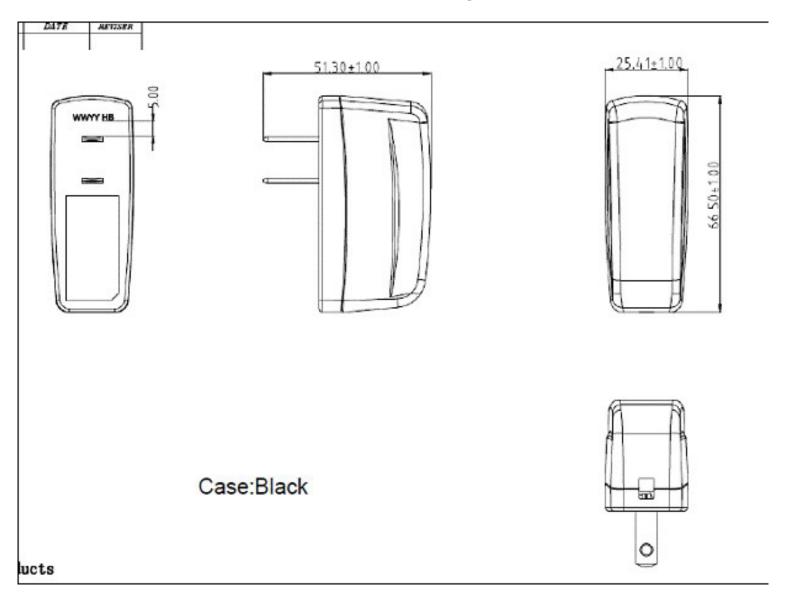

Output Plug: 2.1 x 5.5mm







