



T6633ST 5V 1A US Plugtop

Features:

- For use with Arduino & BeagleBone
- Small & Compact US Plug design
- USA Fixed AC Head
- Level VI ErP/EuP efficiency compliant
- MTBF >50,000 hours
- 1 Year Warranty



Output Characteristics

Part Number	T6633ST
Voltage	+5V
Current Max.	1A
Current Min.	0A
Power (watts)	5W
Line Regulation	+/- 5%
Ripple & Noise (mV p-p)	300 mVp-p Maximum
Output Cord	Wire: 24AWG Jack plug: 5.5*2.1*12mm


Input Characteristics

Rated Input Voltage	100-240Vac
Full Input Voltage Range	90-264Vac
Rated Frequency	50-60Hz
Full Frequency Range	47-63Hz
Input Current	0.2A
Input Plug	USA 2 Pin

Safety, Mechanical and Other Characteristics

Model Number	T6633ST
Dimensions (LxWxH)	67mm X 26mm X 51mm
Weight (Approx)	65g
Leakage Current	0.25mA max
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 60°C
Operating Humidity	20% to 85%
Storage Humidity	5% to 95%
Safety Standard	UL
EMI Standard	CE (EN55022)
MTBF	50K Hours (mean time before failure)

T6633ST Drawing

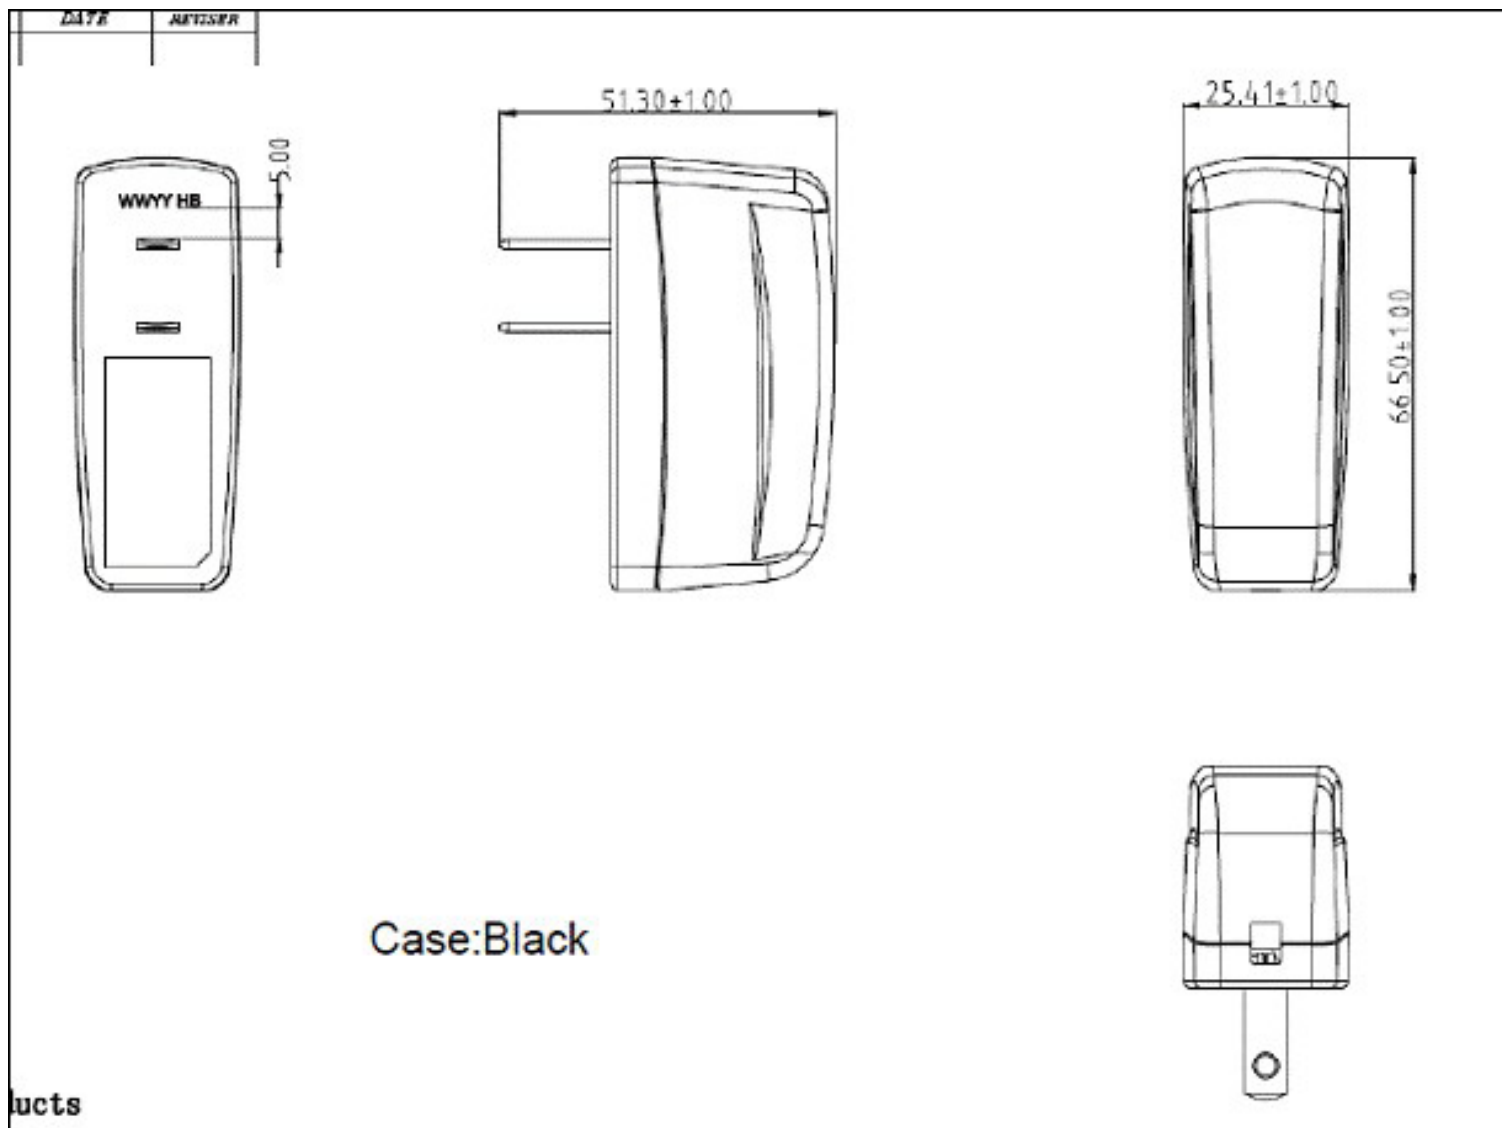

Output Plug: 2.1 x 5.5mm

Stadium Stontronics Ltd

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH.

Tel: +44 (0) 118 931 1199 • Fax: +44 (0) 118 931 1145 • Email: info@stontronics.co.uk • Web: www.stontronics.com

Please Note: Image shown is representative of entire range. Individual PSU image &/or drawings or data sheets available on request.

Stontronics Ltd accepts no responsibility for typographical errors in the production of this leaflet. Product specifications are subject to change without notice.

