


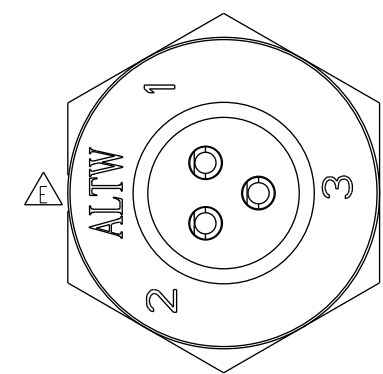
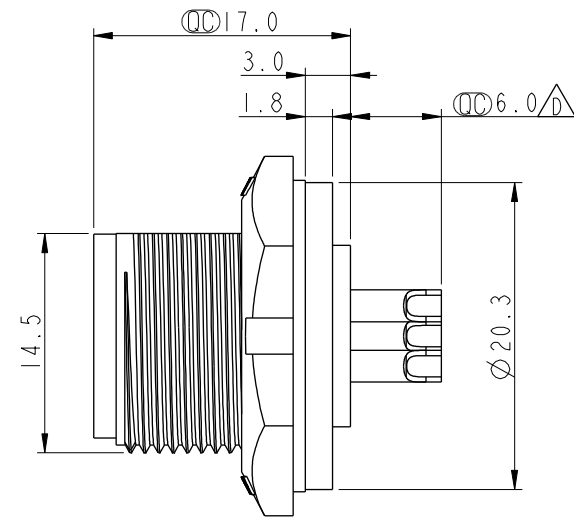


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-910254	2009/01/15	TOMMY	Change Pin Dimension
E	LEN1730303	2017/03/21	Ruru	Change Logo
F	CI90274	2019/02/22	Ruru	Modify Note

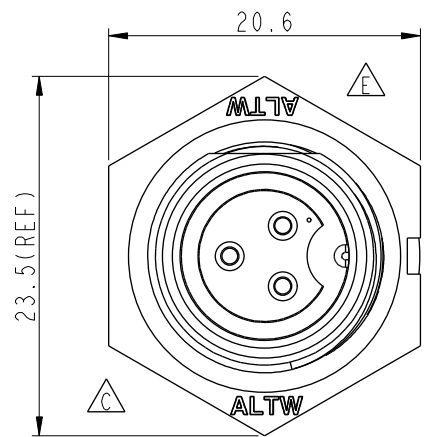

Pin Assignments
Front View

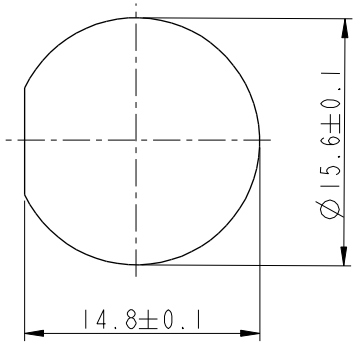

Recommended Panel Cut-out

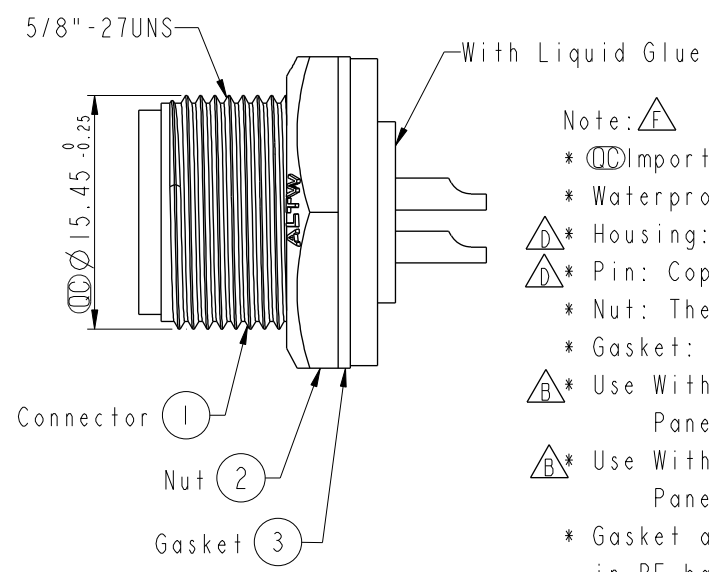

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 3.0mm
 - * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE Standard Panel Screw 3Pin M Conn F Pin			
TOLERANCE		SCALE 2:1	SIZE A4	SHEET 1	OF 1
.X .XX .XXX ANGLES	±0.25 ±0.1 ±0.05 ±1°	REV. F	WC-REV. A.3	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO BD-03PMFS-SC7001	DRAWN BY Ruru	DATE 2019-02-22
DWG NO BD-03PMFS-SC7001	CHECKED BY Rita	DATE 2019-02-22
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-02-22