
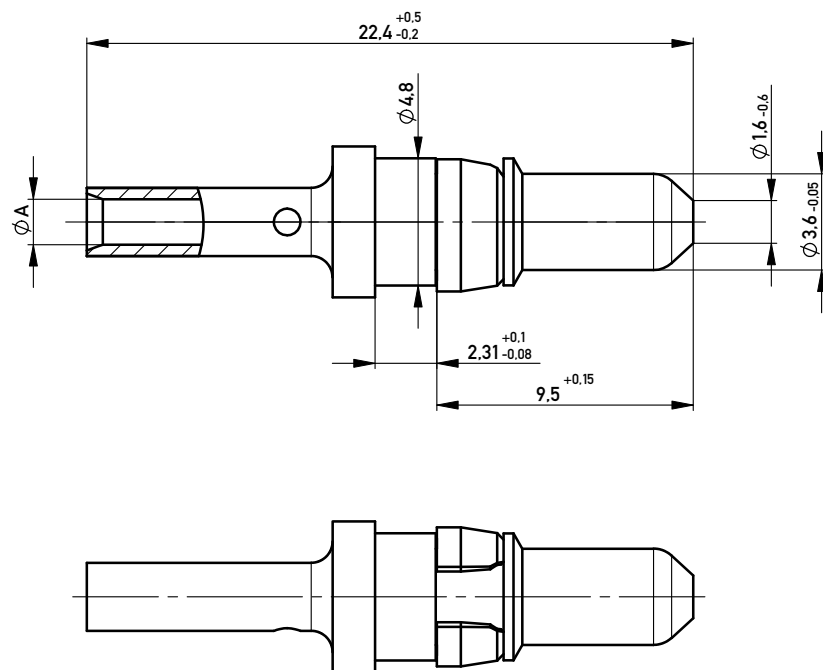


M 2:1



Masse nur informativ,
keine Prüfpläne erstellen.

Technical Data:

Insertion/withdrawal force per contact: $\leq 10\text{ N} / \leq 1.6\text{ N}$
 Mechanical operations: ≥ 500
 Contact resistance: $\leq 1\text{ m}\Omega$

Operation Temperature: $-55^\circ\text{C} - +125^\circ\text{C}$

Solder temperature: according JEDEC 020C
 Suitable assembly process: leadfree wave / reflow soldering

RoHS compliance: yes (6/6)

Designed for use with: right angle male DIN connector
 straight male 2mm HM connector

Packaging: antistatic plastic bag
 Packaging unit: 100 pieces per bag
 Marking of packaging: label or direct printed on bag
 required date see ERNI labeling spec. 254792

Current	Cable cross area	AWG
10 A	1.5 mm ²	16
20 A	4 mm ²	12
30 A	6 mm ²	10
40 A	10 mm ²	8

Missing informations
and dimensions
see at DIN 41626

594231	1	40 A	1.5-2.5 μm Cu, 2-3 μm NiP+, 0.15 μm Au	4.8 -0.4
594229	1	20 A		2.25 +0.6
594227	1	10 A		1.45 +0.4
294841	1	40 A	2 - 3 μm Ni min. 1.3 μm Au	4.8 -0.4
033319	1	30 A		3.55
294840	1	20 A		2.25 +0.6
294839	1	10 A		1.45 +0.4
Part-No.	Class	Current	Plating	$\varnothing$ A

Copyright by ERNI GmbH
Proper early notice pursuant to ISO 16116 is to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale		5:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.				Designation					
								High Current Male Contact <i>Crimp Termination</i>					
												www.ERNI.com	
E				02.06.2008				053310				I	
Index				Date				Class				STVSKO	
												A3	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[594231](#) [594229](#)