



a) Part as supplied

242W0\*\*

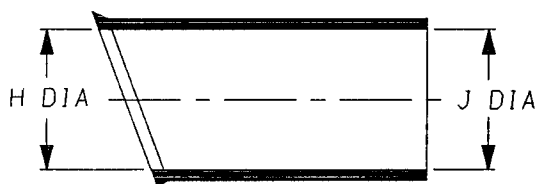

b) Part after unrestricted recovery.

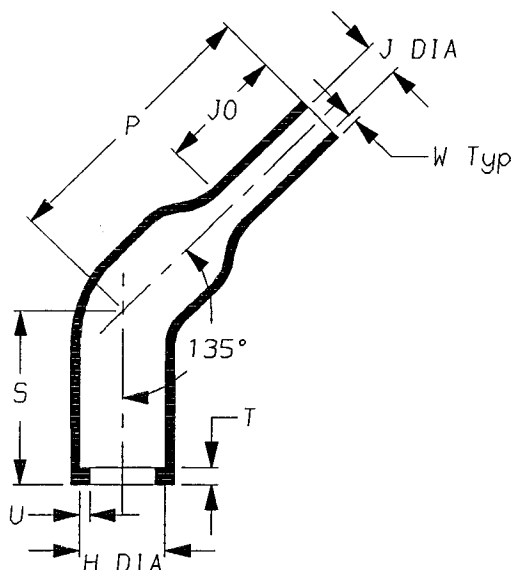

DIMENSIONS (in millimetres).

| Part<br>Number | H        |          | J        |          | P<br>±10% | S<br>±10% | T<br>±10% | U<br>±10% | J0<br>±10% | W<br>±20% |
|----------------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|------------|-----------|
|                | Min<br>a | Max<br>b | Min<br>a | Max<br>b |           |           |           |           |            |           |
| 242W042        | 31       | 17.9     | 31       | 7.0      | 55        | 35        | 3.5       | 2.0       | 25         | 1.8       |
| 242W053        | 36       | 22.1     | 36       | 8.4      | 60        | 40        | 3.5       | 2.0       | 30         | 2.0       |
| 242W063        | 43       | 27.9     | 43       | 9.9      | 65        | 45        | 3.5       | 2.0       | 35         | 2.2       |

**Copyright (!)**


The copyright in this drawing is the property of Tyco Electronics UK Ltd. The drawing is issued on the condition that it is not copied, reproduced or disclosed to a third party, either in whole or in part without the prior written consent of Tyco Electronics UK Ltd.

Drawn A.LILLEY. Checked *dx* Issue 2 Date October 2000

Conforms to ISO Recommendations  
3rd Angle Projection  
Not to Scale


Approval  
Design

MKTG. *W Jones* Q.A.



| Iss. | Date         | E.C.R. No.   | Details of Change |
|------|--------------|--------------|-------------------|
| 2    | October 2000 | CR00-HM-0016 | W was 2.0         |

### Ordering Information

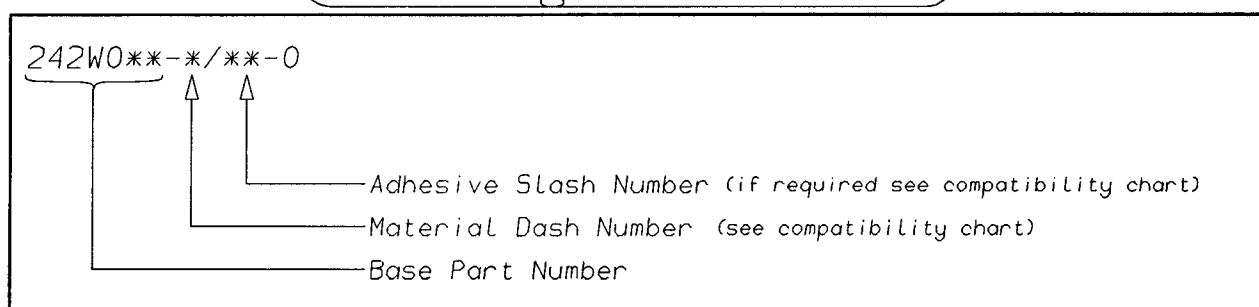

### COMPATIBILITY CHART

| MATERIAL DASH NUMBER | MATERIAL DESCRIPTION            | COATING SLASH NUMBER |
|----------------------|---------------------------------|----------------------|
| -3                   | POLYOLEFIN, SEMI-RIGID          | /42, /86             |
| -4                   | POLYOLEFIN, FLEXIBLE            | /42, /86             |
| -25                  | ELASTOMER, FLUID RESISTANT      | /86, /225            |
| -130                 | POLYOLEFIN, COMMERCIAL FLEXIBLE | /42, /86             |
|                      |                                 |                      |
|                      |                                 |                      |
|                      |                                 |                      |

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,  
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem Wire & Harness  
a Division of Tyco Electronics  
Faraday Road,  
Swindon, Wiltshire, England. SN3 5JA  
Telephone: (01793) 528171 Fax: 572516

Raychem Wire & Harness  
a Division of Tyco Electronics  
300, Constitution Drive, Menlo Park,  
California 94025-1164, USA  
Telephone (650) 361-3333 Fax: (650) 361-5579

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[242W063-25-0](#)