

RAYCHEM

THERMOFIT MOLDED PARTS

SPECIFICATION CONTROL DRAWING


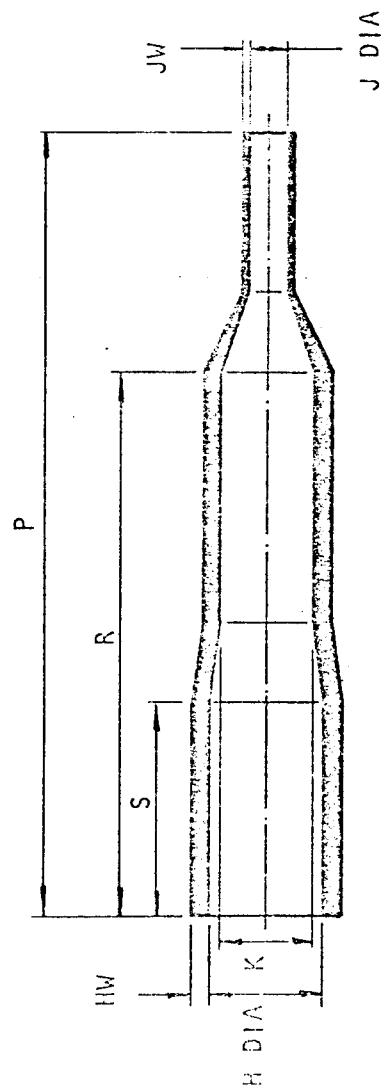


TABLE OF DIMENSIONS

PART NUMBER	H						J						K						P						R						S						JW					
	Min a	Max b	Min a	Max b	Min a	Max b	Min c	Max b	Min a	Max b	Min a	Max b	Min a	Max b	Min a	Max b	Min a	Max b	Min a	Max b	Min a	Max b	Min a	Max b																		
208W012-	25,4	14,0	10,2	5,1	25,4	11,4	-	102	-	71	-	28	-	2,5	-	1,0	mm																									
208W012-	1.00	0.55	0.40	.20	1.00	0.45	-	4.0	-	2.0	-	1.1	-	.10	-	.04	inches																									

a - As Supplied; b - After unrestricted recovery

TABLE OF DIMENSIONS

REV.	AUTH.	DETAILS	Note: Drawing shows typical part after unrestricted recovery, unless otherwise specified. Metric Dimensions Imperial Dimensions												PART DESCRIPTION						PART No.	REV.
			DRN	S	JW	CKD	BRHS	CKD	BRHS	ISS	BRHS	ISS	BRHS	ISS	BRHS	ISS	BRHS	ISS	BRHS	ISS		
B	BRHS	REDRAWN																			208W012-	B

RAYCHEM LIMITED
BOOT, STRAIGHT,
TWO STAGE

PART No.

208W012-

REV.


B

DATE

SEPTEMBER, 1973

Ordering Information

202W232-*/**-0



Adhesive Slash Number (if required see compatibility chart)

Material Dash Number (see compatibility chart)

Base Part Number

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42,/86
-4	POLYOLEFIN, FLEXIBLE	/42,/86
-25	ELASTOMER, FLUID RESISTANT	/86,/225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

POTTING PORTS ARE OPTIONAL
WHEN SPECIFIED BY SUFFIX "-00"
THEY WILL BE LOCATED AS SHOWN

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[208W012-3-0](#)