




DIMENSIONS mm (inches)

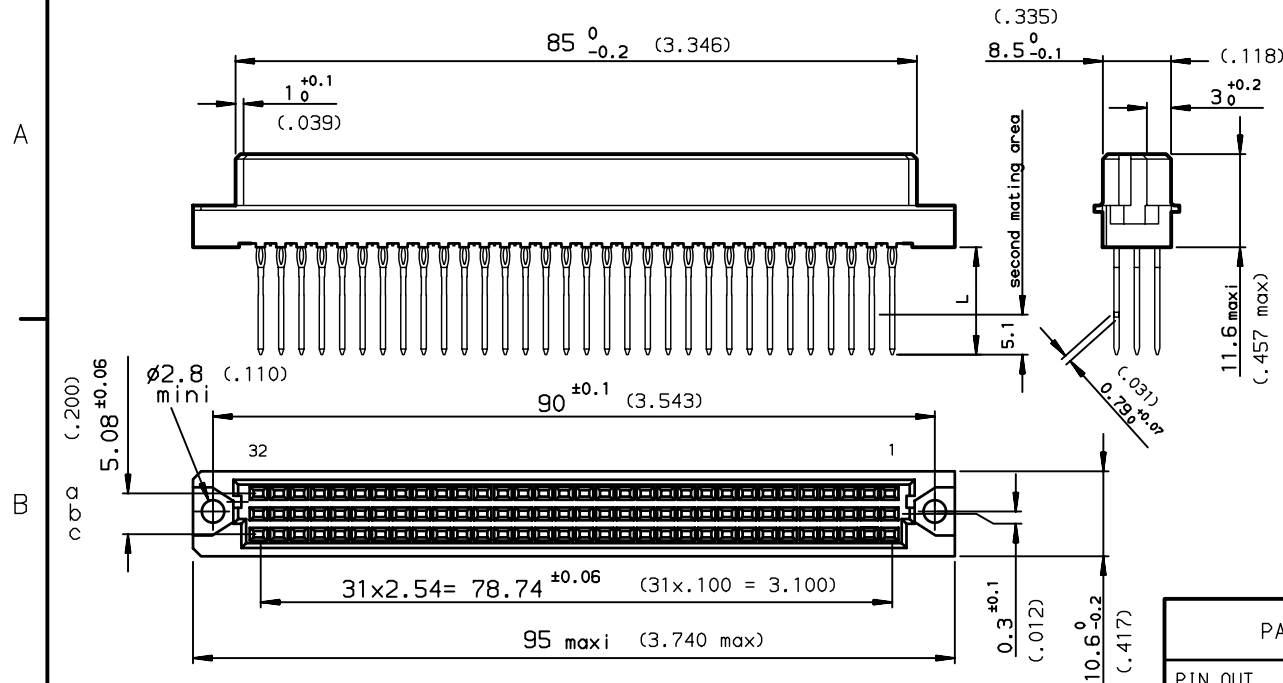

METHOD OF INSERTION
ON THE PCB = FLAT ROCK



PCB DRILLING

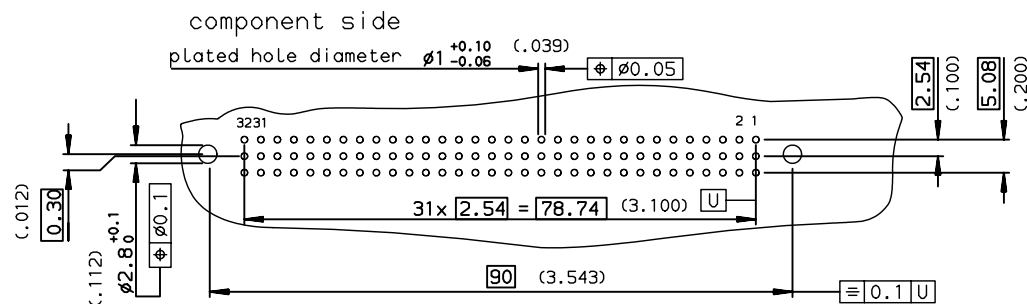

PART NUMBER		8609		81		7		5	
PIN OUT		rows a-b-c		3		96			
		rows a-c		4		64			
NUMBER OF CONTACTS									
TERMINATION		L = 13.10 ±0.20 (0.515)		rear plug up		96			
		L = 17.10 ±0.20 (0.673)		rear plug up + 1 wrap		97			
PERFORMANCE CLASS		DIN 41612 class 3						4	
		DIN 41612 class 2						6	
		DIN 41612 class 1						6	
TERMINATION TYPE		TIN LEAD						000A	
		LEAD FREE						ALF	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1993/06/16	ANGULAR	0.X	±0.1	size	Scale
Eng	TARON	1993/06/16	LINEAR	0.XX	±0.1	A3	1.5
Chr	LEGARE	1993/06/16	0.XX' ±2'	0.XXX	±0.1	ECN	LS06-0095
Appr	LEGARE	1993/06/16	Product family	DIN 8609		Spec ref	-
FCI		title		STRAIGHT FEMALE - STYLE C		Rev.	
		catalog no		PRESS FIT REAR PLUG UP		6	
				C-8609-0366		CUSTOMER sheet 1 of 1	