




RoHS2(10 substances conformity)
 DRAWING FOR REFERENCE: This is subject to change without notice
 In cases where the application will demand a high level of reliability, such as automotive, please contact a company representative for further information.

Applicable standard					
Rating	Operating temperature range	-40 °C to 60 °C	Storage temperature range	-40 °C to 60 °C (At packing)	
Specifications					
Item	Test method		Requirements	QT	AT
Construction					
General examination	Visually and measuring instrument.		According to drawing.	X	X
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
0					
REMARK A product corresponding to RoHS.			APPROVED	MT. SHIBUTANI	17. 07. 14
			CHECKED	FS. YOSHIDA	17. 07. 14
			DESIGNED	TY. SATO	17. 07. 14
			DRAWN	TY. SATO	17. 07. 14
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC-378349-00-00
	SPECIFICATION SHEET		PART NO.	MF11BMT-PC	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL709-7040-0-00	 1/1

RoHS2(10 substances conformity)
 DRAWING FOR REFERENCE: This is subject to change without notice
 In cases where the application will demand a high level of reliability, such as automotive, please contact a company representative for further information.

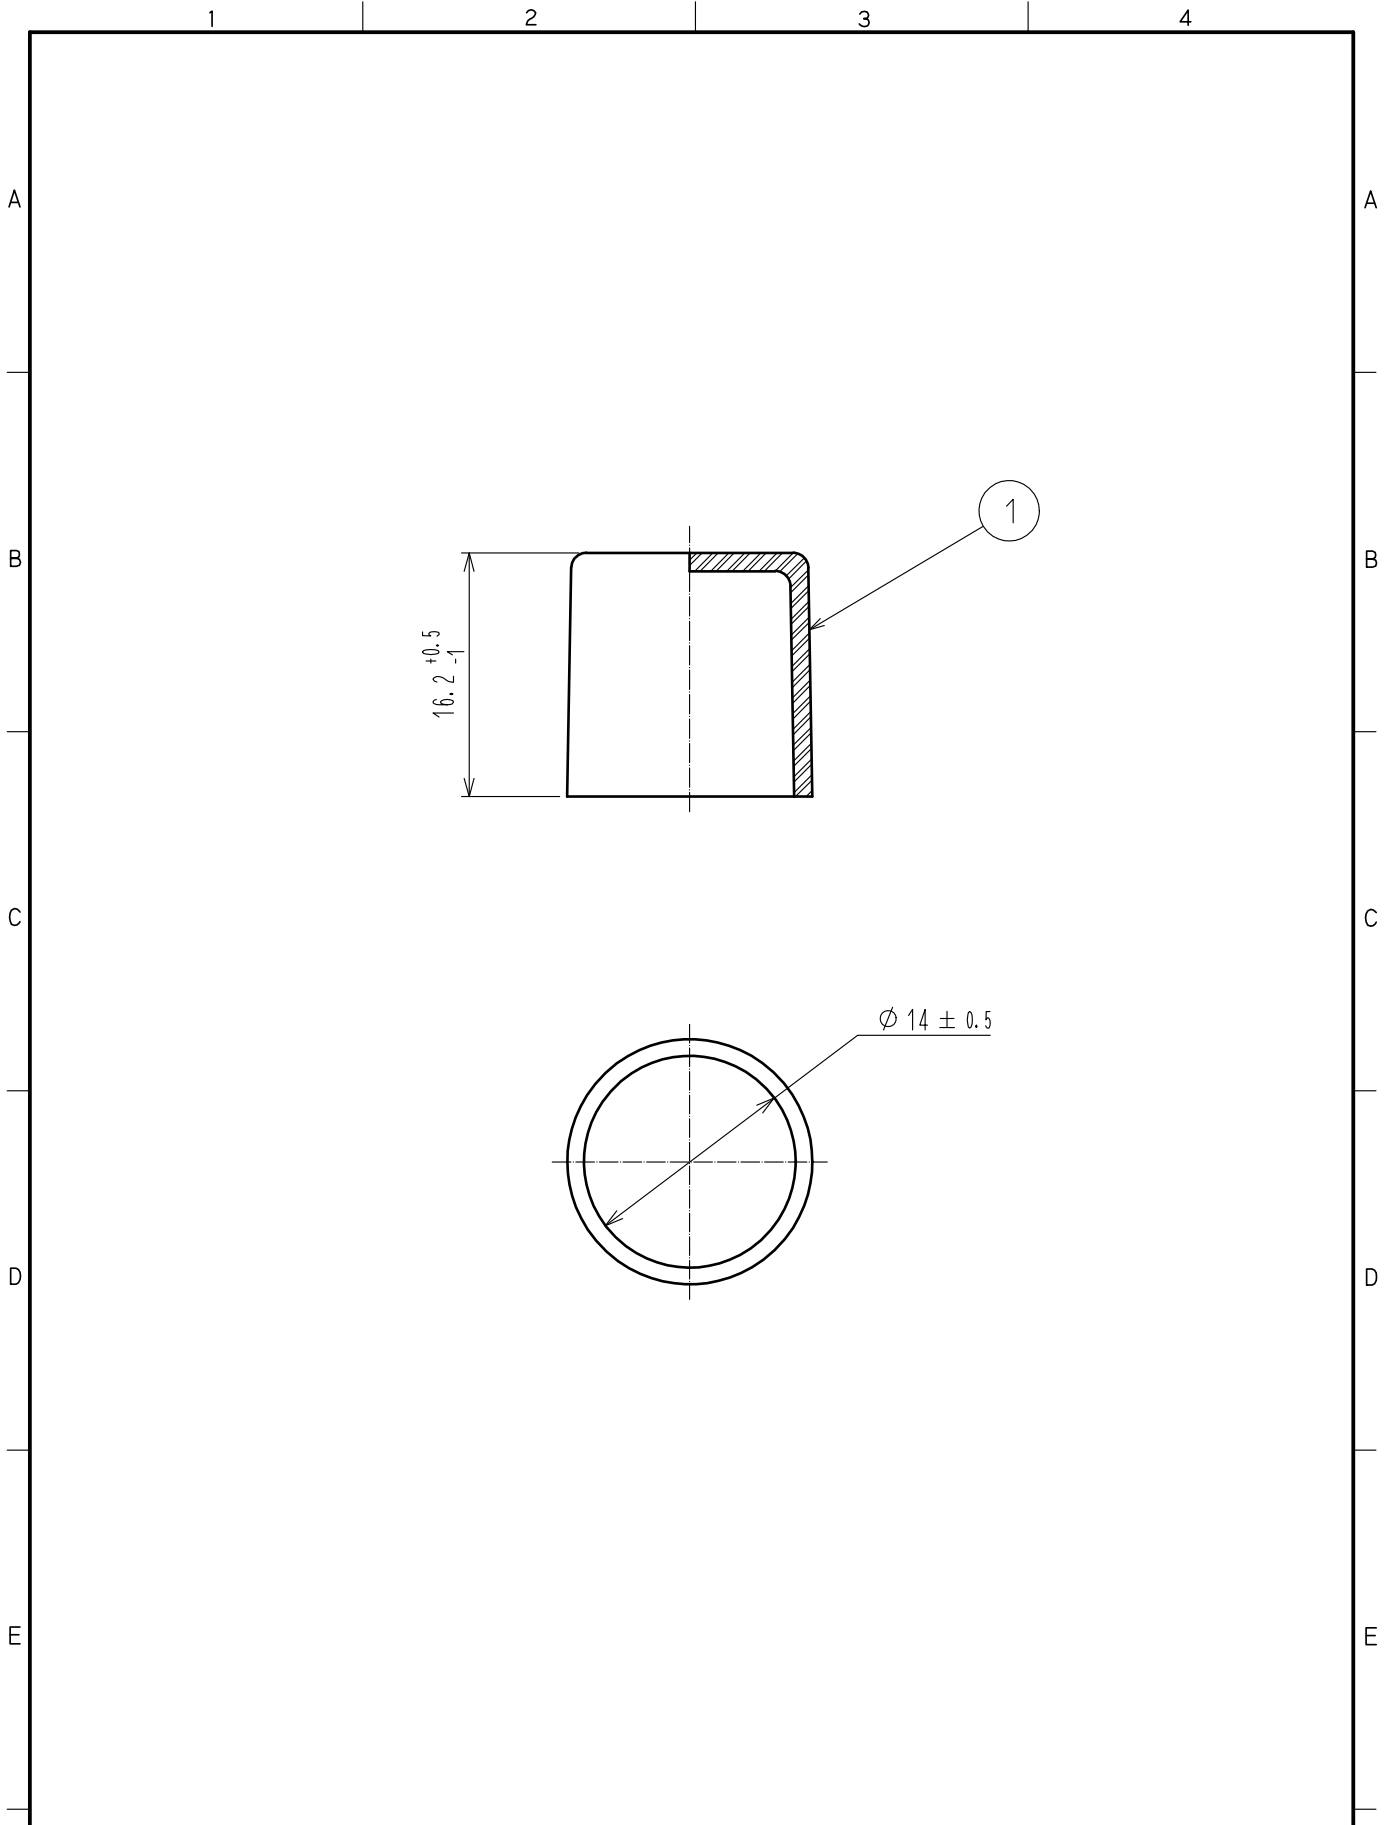

1	Elastomer	Black						
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS	
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : MT. SHIBUTANI	17.07.14	DRAWING NO.		EDC-378349-00-00		
		CHECKED : FS. YOSHIDA	17.07.14	PART NO.		MF11BMT-PC		
		DESIGNED : TY. SATO	17.07.14	CODE NO.		CL709-7040-0-00		
		DRAWN : TY. SATO	17.07.14			1/1		