

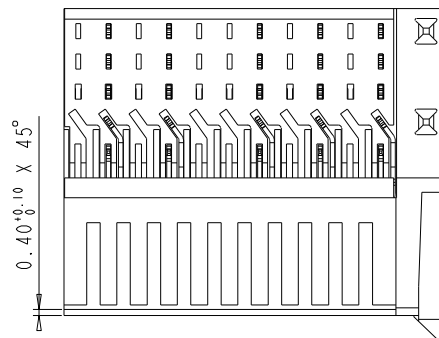


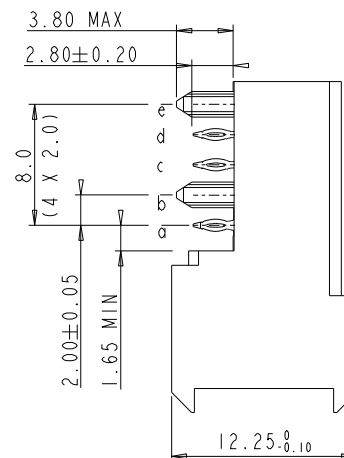


□ EMPTY CAVITY
 ■ CAVITY LOADED WITH CONTACT

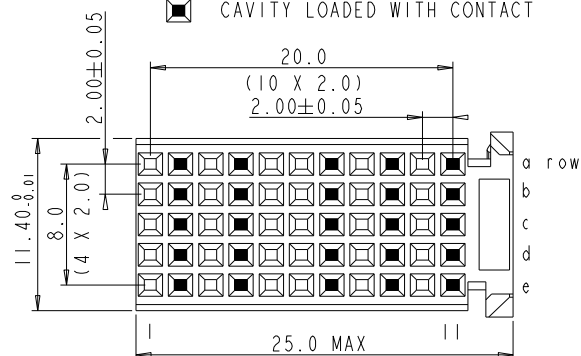

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE : 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE 20 mΩ MAX
 INSERTION FORCE : 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN/CONT
 INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. " " LEAD FREE INDICATOR : LF=LEAD FREE
 " " PERFORMANCE LEVEL INDICATION (REF DWG NO.BSC .201844.003)
 2. THIS PRODUCT IS CSA APPROVED.
 THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS.A.201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

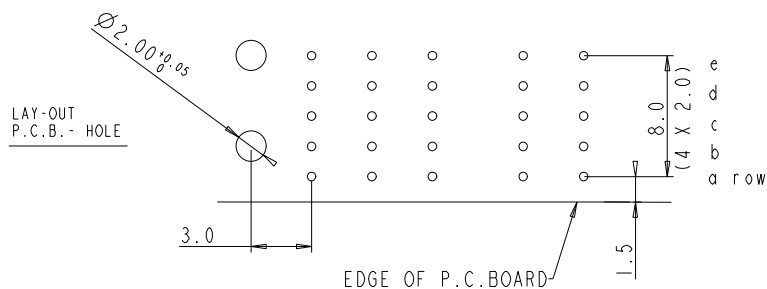

rev	ecn no	dr	date
A	CONVERSION REVISION 02	KN	14-09-01
B	DG05-0278	Kason	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-

Material			Spec ref					
Mat code			✓	tolerance	projection	MM ←————→		
Heattreat				IDEC $\pm$ 0.2 IDEC 2DEC $\pm$ 0.1 2DEC ANGLES $\pm$ 1° HOEKEN				
Plating/Finish								
Dr	M.Fret	09-03-98			size	Scale		
Eng			Product family MILLIPACS		A4	2.000		
Chr			Model Name		ECN	DG05-0278		
Appr			Model Revision		REL Level			
		title		MPACS 5+2R RA RCP CONN TYPE C		dwg no	BSC202468005	Rev
Pro/E file		catalog		HM2P03PACA20 --- CUSTOMER DRAWING		sheet 1 of 1		B