
Up tp **six** switch contacts can be installed.

3 POSITION SELECTOR SWITCH CONTACT BLOCK OPERATION GUIDE

③	①	0	CONTACT BLOCK GUIDE
×	0	0	1 NO (left)
0	×	0	2 NC in series (side × side)
0	0	×	1 NO (right)
×	×	0	1 NC (right)
0	×	×	1 NC (left)
×	0	×	2 NO in parallel (side × side)

(Left or right as seen from front of operator)

REVISION FOR DWG #			DWG #	1PB-2AS2E-x			
	REV	CH.NO.		DESCRIPTION		DATE	REVISED BY
	-	-		ORIGINAL DESIGN		11/01/07	PHILIPP E.
		•					

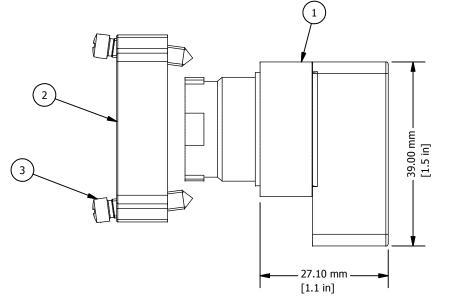

ITEM	DESCRIPTION	CAT. NO.	DESCRIPTION	Color	MIN. QTY.	MAX. QTY.
		2AS2E-1	Maintained	Black	1	1
		2AS2E-2	Spring Return	Black	1	1
1*	Selector Switch	2AS2E-3	Maintained	Black	1	1
1	Selector Switch	2AS2E-4	Spring Return	Black	1	1
		2AS2E-5	Spring Return	Black	1	1
		2AS2E-6	Spring Return	Black	1	1
2*	Mounting Bracket	2BRK	-	-	1	1
3	Mounting Bracket Screws	incl. in 2BRK	-	-	2	2
4	Panel	-	-	-	-	-
		S1	-	Green	1	6
5**	Switch Contacts	S2	-	Red	1	6
5	Switch Contacts	S3	-	Green/Black	1	6
		S4	-	Red/Black	1	6

max. 6 mm [.25 in] 43 mm [1.7 in] 67 mm [2.6 in] 91 mm [3.6 in]

Selector Switch is supplied with mounting bracket (ITEM 1,2 and 3) Switch Contacts must be order separatly

	NSIONS	SE SPECIFIED: ARE IN MILLI OJECTION	This Drawing is the property of			
TOLERANCE XX XX.X XX.XX	= = =	±1 mm ±0.5 mm ±0.2 mm		בח⊢תי	35 Royal Road Flemington, NJ 08822-6000 (908) 806-9400 Fax (908) 806-9490	

AND IS A CONFIDENTIAL DISCLOSURELENT WITHOUT CONSIDERATION OTHER THAN THE BORROWER'S AGREEMENT THAT IT SHALL NOT BE REPRODUCED, COPIED, LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SPECIFICALLY FURNISHED.

11TEL 22 mm Non-Illuminated Metal Extended Selector Switch Operator 2AS2E-x

DRAWN BY: Philipp Ernstberger 11/01/07		DRAWING NO.:							
CHECKED BY: Laszlo Gyorgypal	11/01/07	1PB-2AS2E-x							
RELEASED BY: Laszlo Gyorgypal	11/01/07	SCALE:	SHEET: 1	0F: 1					