


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	28JUN2015	DW	CW
	AI	ECR-17-009384	25DEC2017	RL	CW

ASSEMBLY STATE OF THE PRODUCT, FOR REFERENCE

产品装配状态, 供参考

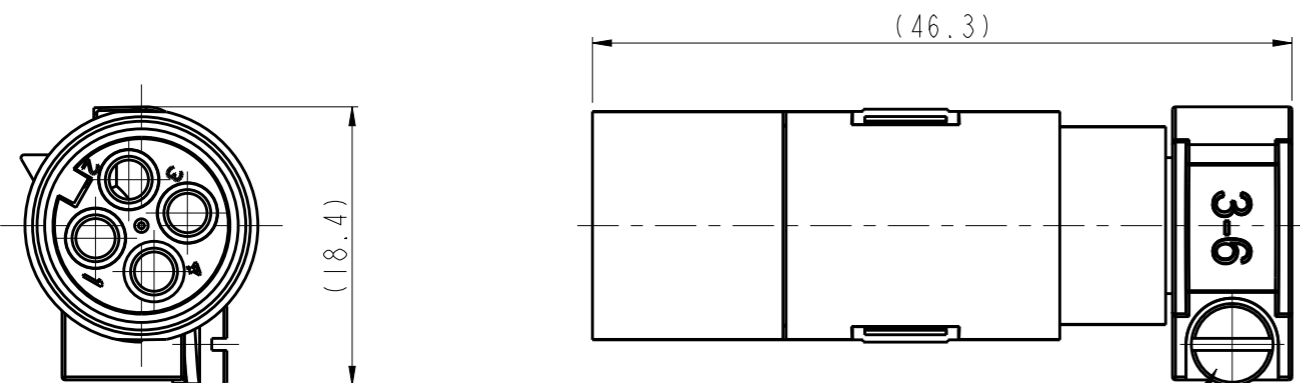

M3 SCREW, RECOMMENDED  
TIGHTENING TORQUE 0.5 Nm  
M3螺丝, 推荐锁紧力矩 0.5 Nm




NOTES:

- TECHNICAL CHARACTERISTICS:  
INSULATION MATERIAL: PC  
RATED VOLTAGE: 50V  
RATED CURRENT: 10A  
RATED IMPULSE VOLTAGE: 0.8KV  
POLLUTION DEGREE: 3  
FLAMMABILITY: UL94V-0  
WIRE RANGE: 0.14-2.5 mm<sup>2</sup> (26-14 AWG)  
CABLE DIAMETER: 3 - 9.5 mm  
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.  
(ORDER No. REFER TO DRAWING: T20200X10XX000)


注释:

- 技术参数:  
绝缘材料: PC  
额定电压: 50V  
额定电流: 10A  
额定脉冲电压: 0.8KV  
污染等级: 3  
阻燃等级: UL94V-0  
接线范围: 0.14-2.5 mm<sup>2</sup> (26-14 AWG)  
电缆外径: 3-9.5 mm  
接线类型: 冷压接
- 端子需要单独订购。  
(订货号参考图面: T20200X10XX000)

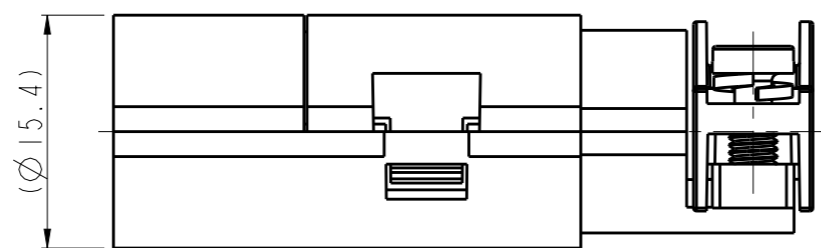


FOR ∅ 6-9.5mm CABLE  
用于直径 ∅ 6-9.5mm 电缆线

FOR ∅ 3-6mm CABLE  
用于直径 ∅ 3-6mm 电缆线

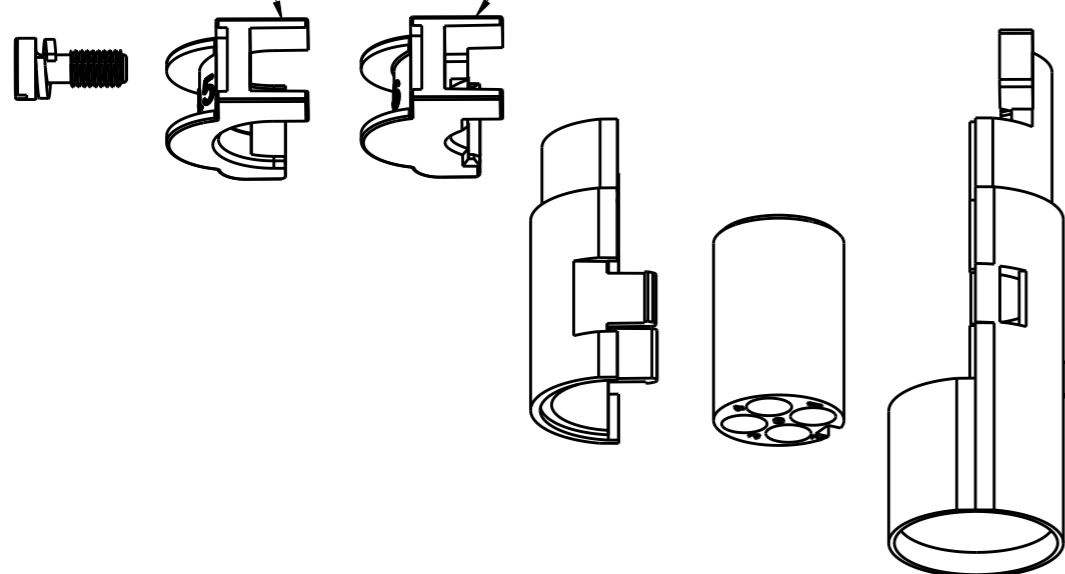

T2580031154-000	PIN-Q2-M	QUINTAX MALE CONTACT 4-POS QUINTAX 4-POS公针
-----------------	----------	---

PART NUMBER 料号	PART DESCRIPTION 描述
-------------------	------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 28JUN2015 David Wang	 TE Connectivity			
DIMENSIONS: mm		CHK 28JUN2015 Chris Wang			NAME QUINTAX MALE CONTACT 4-POS PIN-Q2-M	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 28JUN2015 Xiang Xu				
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC 108-137067				
MATERIAL	FINISH	APPLICATION SPEC 114-137067	SIZE A3	CAGE CODE 00779	DRAWING NO C-T2580031154000	RESTRICTED TO -
		WEIGHT -	SCALE 2:1		SHEET 1 OF 1	REV A1
		Customer Drawing				