
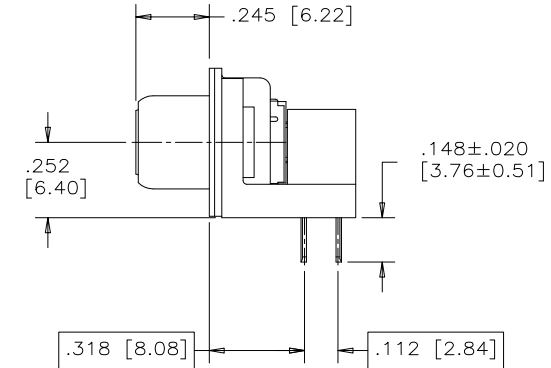
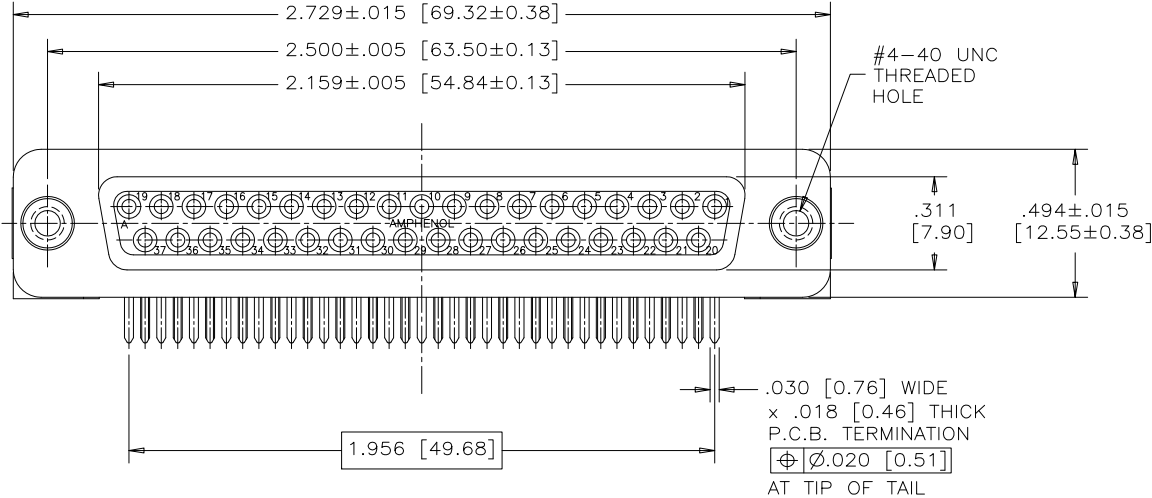


| REVISIONS |                             |          |        |
|-----------|-----------------------------|----------|--------|
| REV       | ECN, ERN NO.                | DATE     | APPRD. |
| A         | PRODUCT DRAWING (EAR 14134) | OCT16/12 | K.L.   |

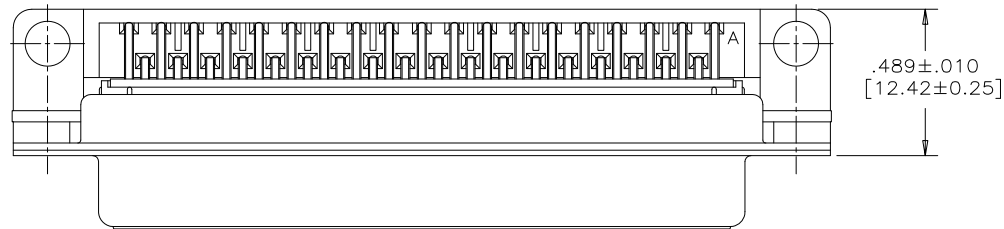

# NOTES:

- MATERIALS: — SHELLS — TIN PLATED STEEL  
— CONTACTS — PHOSPHOR BRONZE PLATED WITH 15μ" [0.38μm] GOLD OVER 50μ" [1.27μm] NICKEL ON THE MATING AREA AND TIN-LEAD ON THE TERMINALS  
— INSULATOR — ENGINEERING THERMOPLASTIC, FLAMMABILITY RATING UL94V-0, BLACK
- CONTACT RESISTANCE: 15 MILLIOHMS MAXIMUM
- INSULATION RESISTANCE: 3000 MEGOHMS MINIMUM
- DIELECTRIC WITHSTANDING VOLTAGE: 600 VDC
- CURRENT RATING: 5 AMPS MAXIMUM
- OPERATING TEMPERATURE: -40°C TO 85°C
- TOLERANCE, UNLESS INDICATED OTHERWISE, ±.005 [0.13]

ORDERING CODE: F C C 1 7 - C 3 7 S A - 3 9 1

SERIES

SIZE/NUMBER OF CONTACTS  
C37

CONNECTOR STYLE  
S=SOCKET

TERMINATION TYPE  
A=.318" [8.08] FOOTPRINT

MOUNTING  
3=#4-40 UNC THREAD

MODIFIER

1=BOARDLOCK OMITTED

FILTER CAPACITANCE

9=5600 pF ±15%

REFER TO AMPHENOL CATALOGUE FOR FILTER PERFORMANCE CHARACTERISTICS

|                   |                               |                               |                                                                                                                |  |
|-------------------|-------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------------|--|
| MATERIAL<br>----- | DRAWN A.ESPIE                 | DATE OCT16/12                 | Amphenol Canada Corp.                                                                                          |  |
|                   | DESIGNED                      |                               |                                                                                                                |  |
|                   | CHECKED                       |                               |                                                                                                                |  |
|                   | I. E. APPRD.                  |                               |                                                                                                                |  |
|                   | Q. A. APPRD.                  |                               |                                                                                                                |  |
| FINISH<br>-----   | DWG. APPRD. K.LAMBIE          | OCT16/12                      | TITLE<br>FCC17 FILTERED D-SUB, 37 SIZE SOCKET, .318 F/P BEND, PLASTIC BRACKET, #4-40 THREAD, BOARDLOCK OMITTED |  |
|                   | ENG. REL. NO.                 |                               |                                                                                                                |  |
|                   | REF. EAR 14134                |                               |                                                                                                                |  |
|                   | DIMENSIONS ARE IN INCHES [mm] | CODE ID. NO. 03554            |                                                                                                                |  |
|                   |                               |                               |                                                                                                                |  |
| DWG. C            |                               | DRAWING NO. P-FCC17-C37SA-391 | REV. A                                                                                                         |  |
| SCALE 3/1         | WT. -----                     | SURF. -----                   | SHEET 1 OF 1                                                                                                   |  |

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.