




BAG, LOW CHARGING PINK POLY

Transparent light pink, low density polyethylene bags have low charging (antistatic) properties.

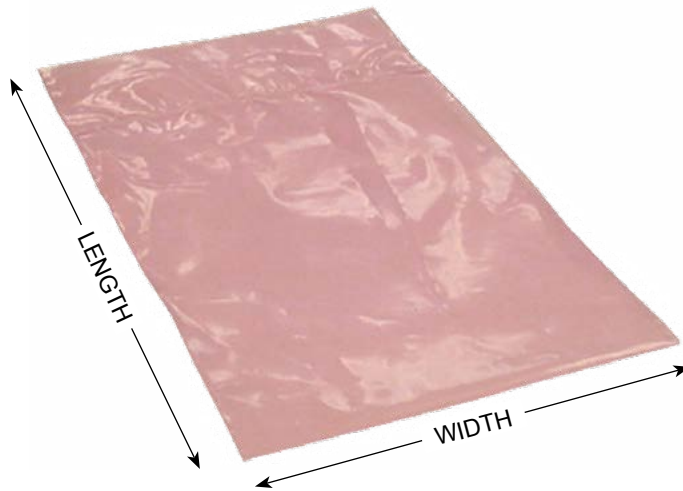

Specifications:

Electrical Properties

| Electrical Properties | Typical Value |
|---------------------------|--|
| Static Decay: | < 1.0 sec. |
| Surface Resistance: | 1 x 10 ⁹ to < 1 x 10 ¹³ ohms |
| Polycarbonate Haze: | NE |
| Corrosivity Observations: | NE |

Test Procedures/Method

| |
|----------------------|
| ASTM 101 Method 4046 |
| ANSI/ESD STM11.11 |
| 72 hr contact |
| MIL-STD-3010, M3005 |

Physical Properties

| | | |
|--------------------------------|-------------------------------------|-------------------------------|
| Material Thickness: | 4.0mils (0.004", 0.1016mm), +/- 10% | |
| Melt Index: | 0.050 gm/ 10 min | ASTM D-1283 |
| Density: | 0.923 gm/cc | ASTM D-1505 |
| Dart Impact: | 230 gms | ASTM D-1709 |
| Coefficient of Friction: | MD 24,000 psi | ASTM D-1894 (unmodified film) |
| 1% Secant Modulus (Stiffness): | MD 25,000 psi | ASTM D-882 |

Pink Poly bags should be used within a timely manner and should not be reused as the ESD properties will negate over time

| Item No. | Size W x L |
|-----------------------|------------|
| 49100 | 2" x 3" |
| 49101 | 3" x 4" |
| 49102 | 3" x 5" |
| 49103 | 4" x 6" |
| 49106 | 6" x 8" |
| 49108 | 6" x 10" |
| 49109 | 8" x 10" |
| 49110 | 8" x 12" |
| 49111 | 10" x 12" |
| 49112 | 10" x 14" |
| 49114 | 12" x 16" |
| 49116 | 15" x 18" |
| 49119 | 18" x 24" |
| Packaged 100 per pack | |

RoHS, REACH and Conflict Minerals Statement

See the Desco Industries RoHS, Reach and Conflict Minerals Statement:
Descoindustries.com/ROHS3.aspx

See the Protektive Pak Limited Warranty:
Protektivepak.Descoindustries.com/Limited-Warranty.aspx



Made in the United States of America

Specifications are subject to change without notice.

TRANSPARENT LOW CHARGING (PINK POLY) BAGS

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578
ProtektivePak.com

DRAWING NUMBER
49100

DATE
February
2019

Dimensional tolerances unless otherwise specified:
L: +/- 0.250" / W: +/- 0.250"

PROTEKTIVE PAK