

896 MHz Balun/Filer Combination

Detail Specification: 10/24/08

P/N 0896FB15A0100

Page 1 of 2

General Specifications

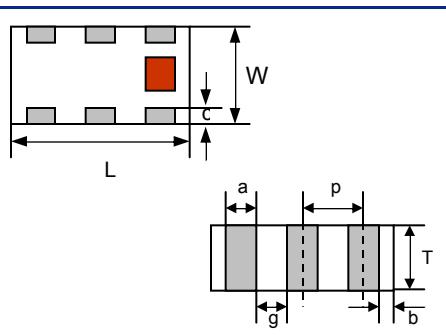
Part Number	0896FB15A0100
Frequency (MHz)	863 - 928
Unbalanced Impedance	50 Ω
Balanced Impedance	100 Ω
Insertion Loss	1.5 dB max.
Return Loss	11.7 dB min.
VSWR @ BW	1.7 max.
Phase Difference	180° ± 15
Amplitude Difference	2.0 dB max.

Attenuation (dB)	30 min. @ 1726~1856MHz
	30 min. @ 2589~2784MHz
	30 min. @ 3452~3712MHz
Power Rating	1W max.
Reel Quantity	4000
Operating Temp.	-40 to +85 °C
Storage Conditions	+5 to +35°C, RH 45 to 75%
Storage Period	12 mos. max.*

* - 1 yr shelf life in bag; 1 week shelf life out of bag;
Vacuum reseal unused reel

Mechanical Dimensions

	In	mm
L	0.079 ± 0.008	2.00 ± 0.20
W	0.049 ± 0.008	1.25 ± 0.20
T	0.028 ± 0.004	0.70 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +0.004/-0.008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

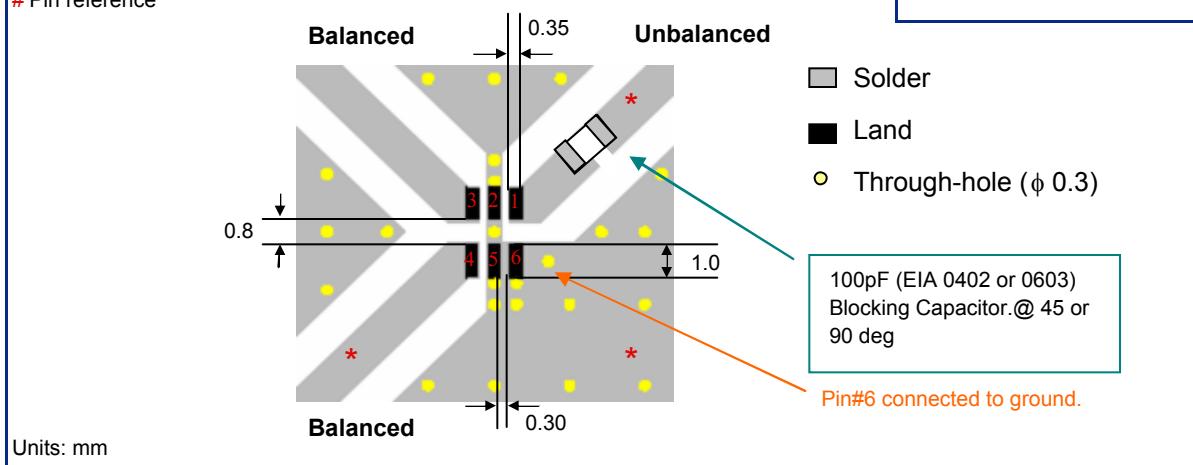
**Terminal Configuration**

No.	Function
1	Unbalanced Port
2	GND
3	Balanced Port
4	Balanced Port
5	GND
6	GND

Mounting Considerations

* Line width should be designed to match 50 Ω characteristic impedance,
depending on PCB material and thickness.

Pin reference



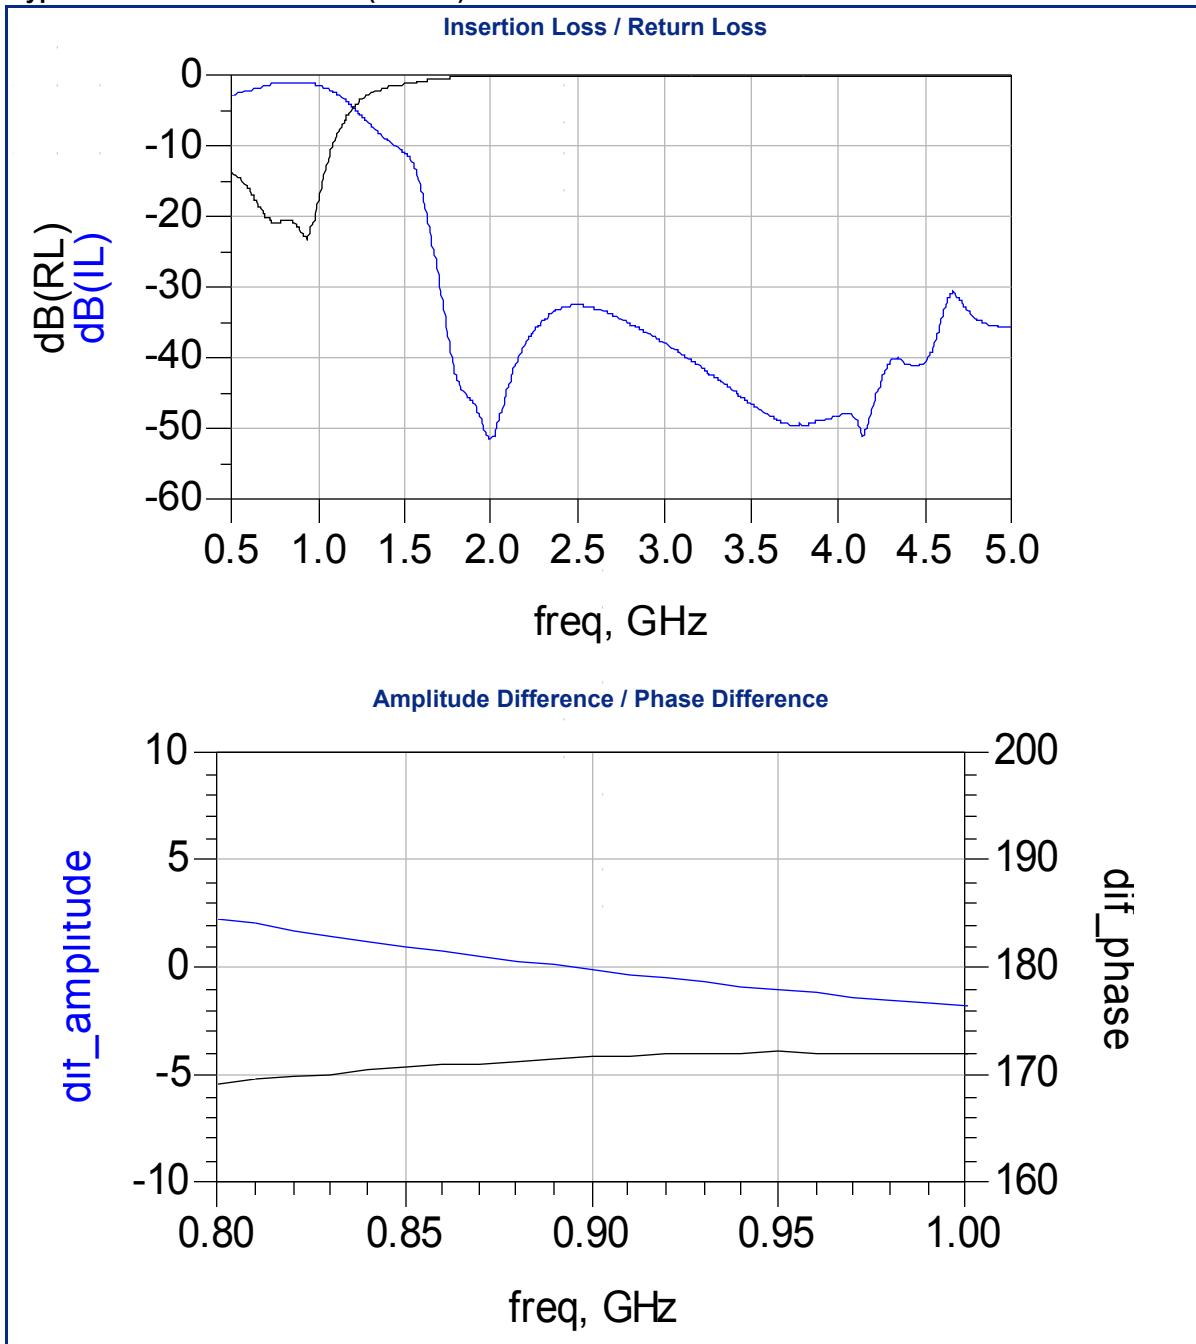
Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

896 MHz Balun/Filer Combination**P/N 0896FB15A0100**

Detail Specification: 10/24/08

Page 2 of 2

Typical Electrical Performance (T=25°C)

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.