

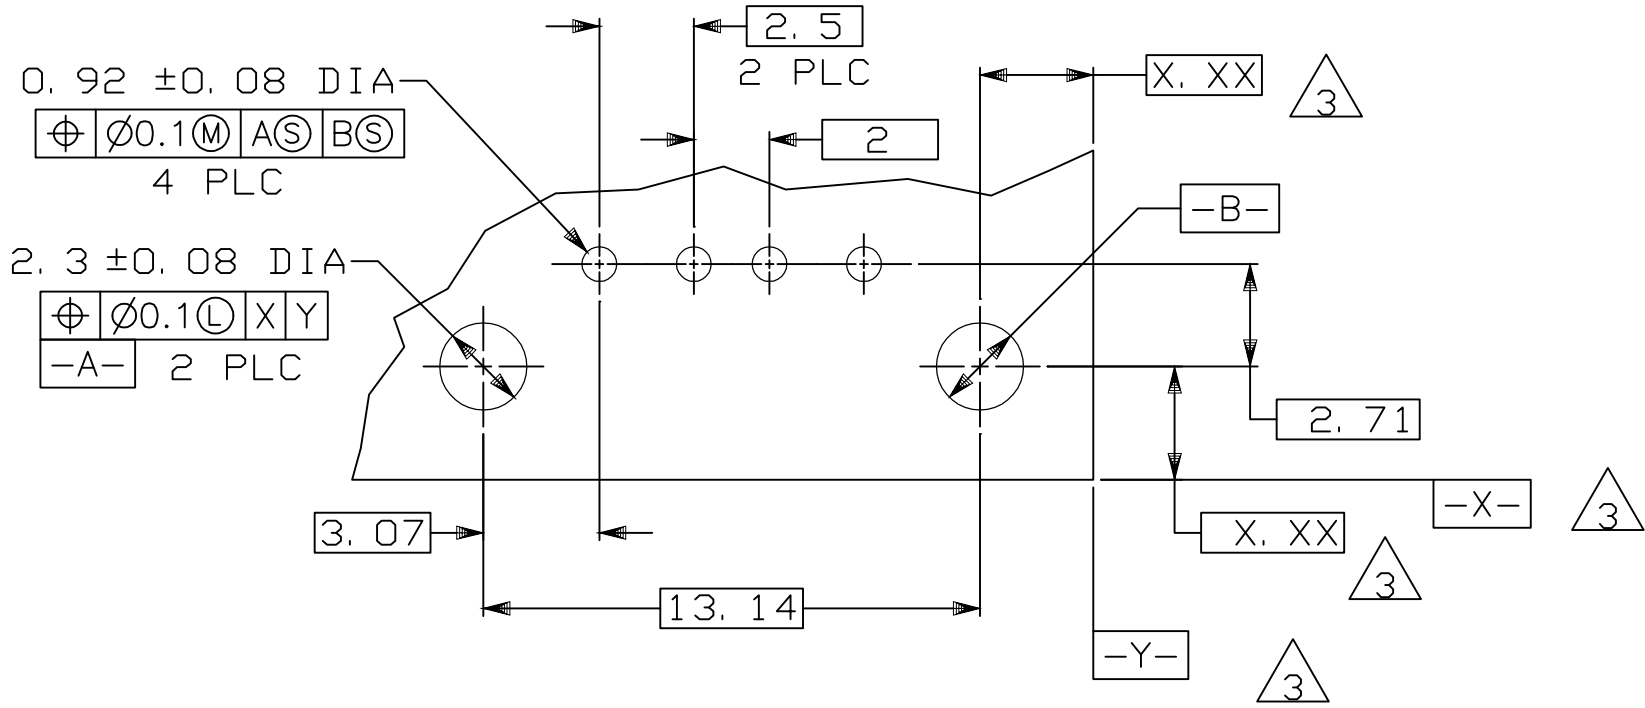
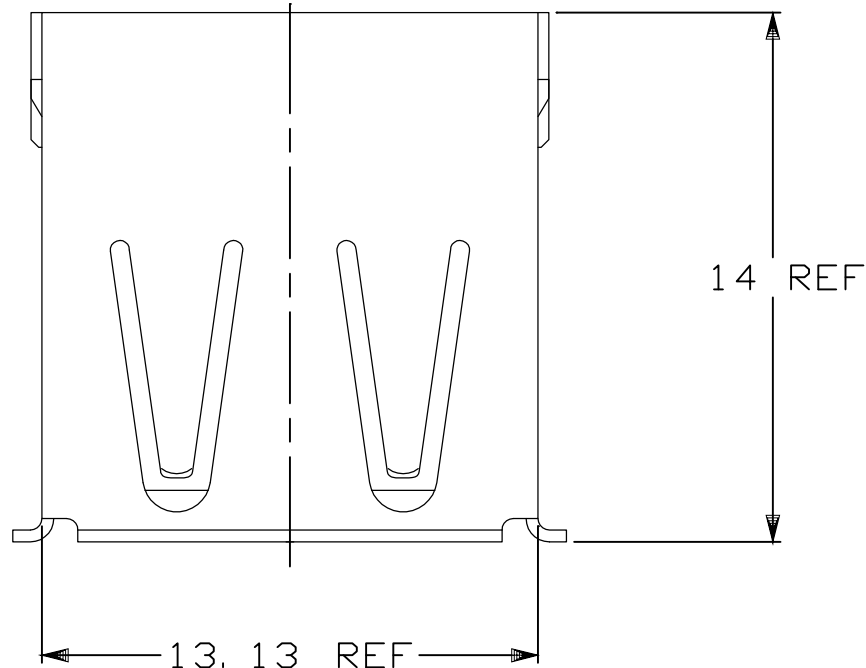


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER E-17-000316	16JAN2017	A.X	H.W

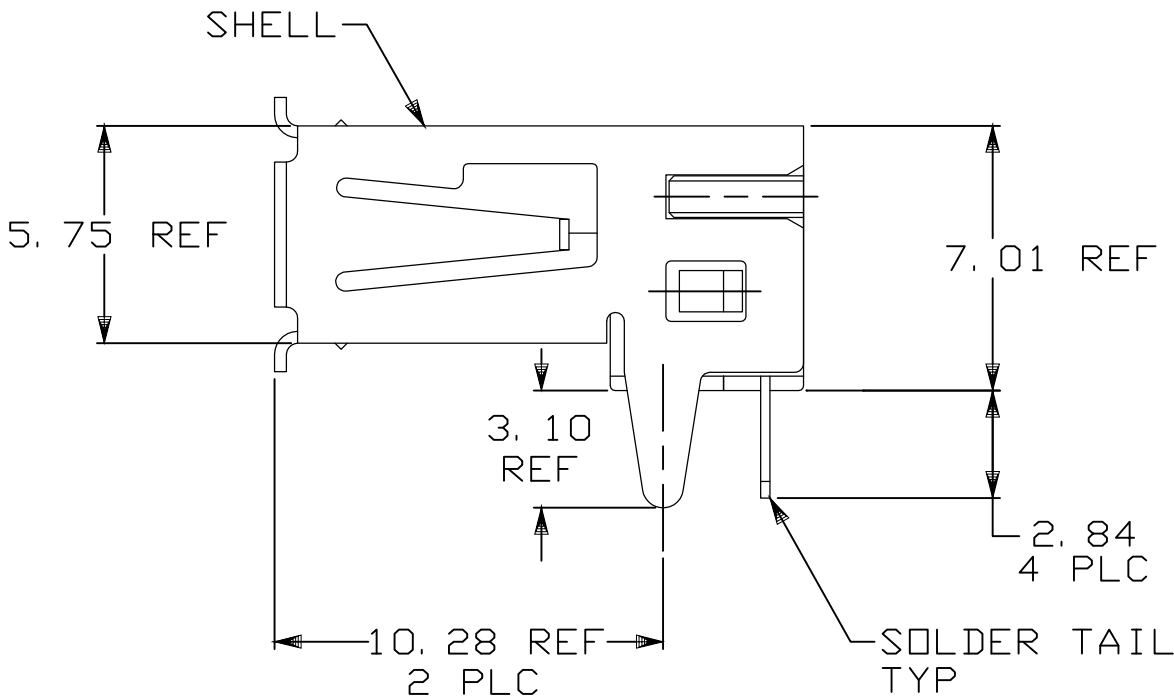


PC BOARD MOUNTING DIMENSIONS 4

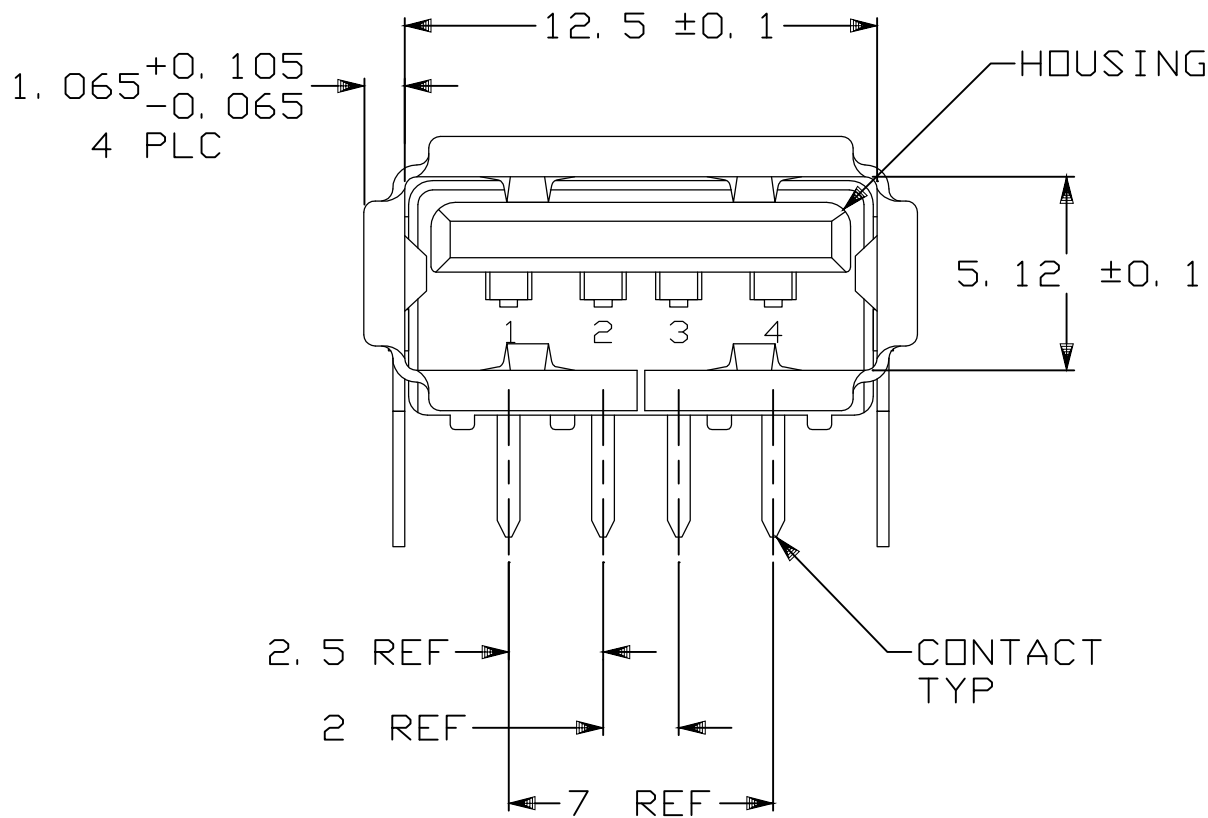

- 1 MATERIAL:
SHELL & CONTACTS- COPPER ALLOY.
HOUSING- UL 94V-0 RATED, THERMOPLASTIC, COLOR SEE TABLE.
- 2 PLATING:
CONTACTS- 0.076um MINIMUM GOLD OVER 0.76um MINIMUM PALLADIUM-NICKEL ON MATING AREA.
3.8um MINIMUM MATTE TIN ON SOLDER TAILS.
BOTH OVER 1.27um MINIMUM NICKEL.
CONTACT ALTERNATE PLATING: 0.76um MIN GOLD ON MATING AREA, 3.80um MIN MATTE TIN ON SOLDER TAILS, BOTH OVER 1.27um MIN NICKEL.
SHELL: 2~5um MINIMUM BRIGHT TIN
- 3 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.

TAPE&REEL	YES	NATURAL	6364372-3
TUBE	YES	NATURAL	6364372-2
TUBE	NO	BLACK	6364372-1
PACKAGING	HIGH TEMPERATURE COMPATIBLE	HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.JIANG 12APR2004		 TE Connectivity					
DIMENSIONS: mm		CHK S.YAO 12APR04							
		APVD J.QU 12APR04		NAME RECEPTACLE ASSEMBLY, RIGHT ANGLE, 4POSITION, THRU-HOLE, USB					
		PRODUCT SPEC —							
		APPLICATION SPEC —							
		—							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
0 PLC ± -		A2		00779		C=6364372		—	
1 PLC ± -		WEIGHT		0					
2 PLC ± 0.25		CUSTOMER DRAWING				SCALE		5:1	
3 PLC ± -						SHEET		1 of 1	
4 PLC ± -						REV		A1	
ANGLES ± -									
FINISH									
									
									