

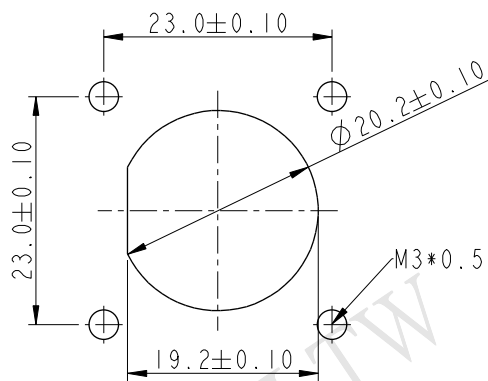



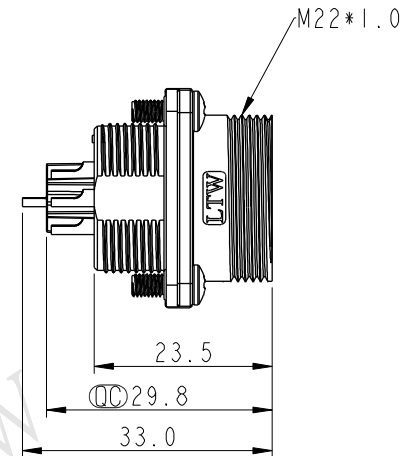

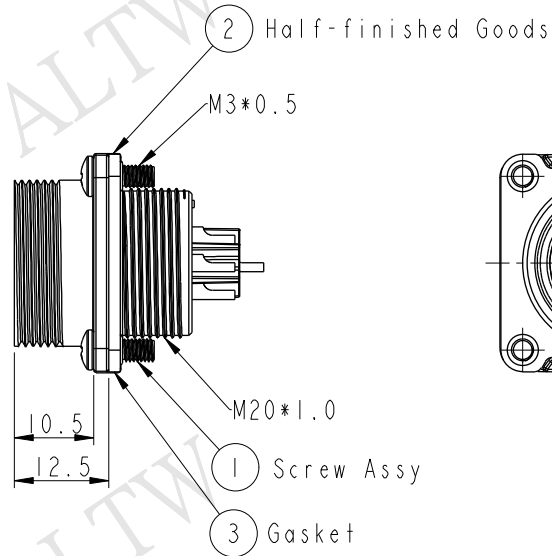


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/10/22	Ruru	LB20-07PMFS-SS8001 To LB20-07PMFS-SW8001
B	LE31650228	2016/05/04	Vicky	Update Note



Recommend Panel Cut-Out

Assembly Instruction

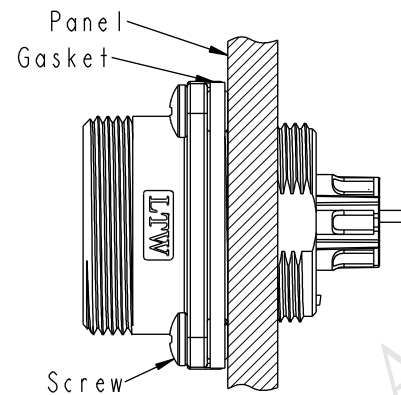

Note:

- * $\varnothing$ Important Dimension.
- * Waterproof Rate: IP68.
IP68: 1M depth of water in 24 Hrs.
(防水等級: IP68)
IP68: 水深一米測試24小時
- * Shell: Zinc Alloy#3, Ni Plated, Silver.
- * Insulation: Nylon, Black.
- * Female Pin: Copper Alloy, Silver Plated.
- * Gasket: Silicone, Gray.
- * Screw: Stainless Steel.
- * Recommended Panel Thickness 9mm(Max).

UNIT: mm			TITLE PANEL SCREW 7PIN M CONN F PIN			
TOLERANCE	.X ±0.25	.XX ±0.1	SCALE 1:1	SIZE A4	SHEET 1	OF 1
ANGLES	.XXX ±0.05	±1°	REV. B	WC-REV. A.2	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO LB20-07PMFS-SW8001	DRAWN BY Vicky	DATE 2016-05-04
DWG NO LB20-07PMFS-SW8001	CHECKED BY Rita	DATE 2016-05-04
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016-05-04

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.