

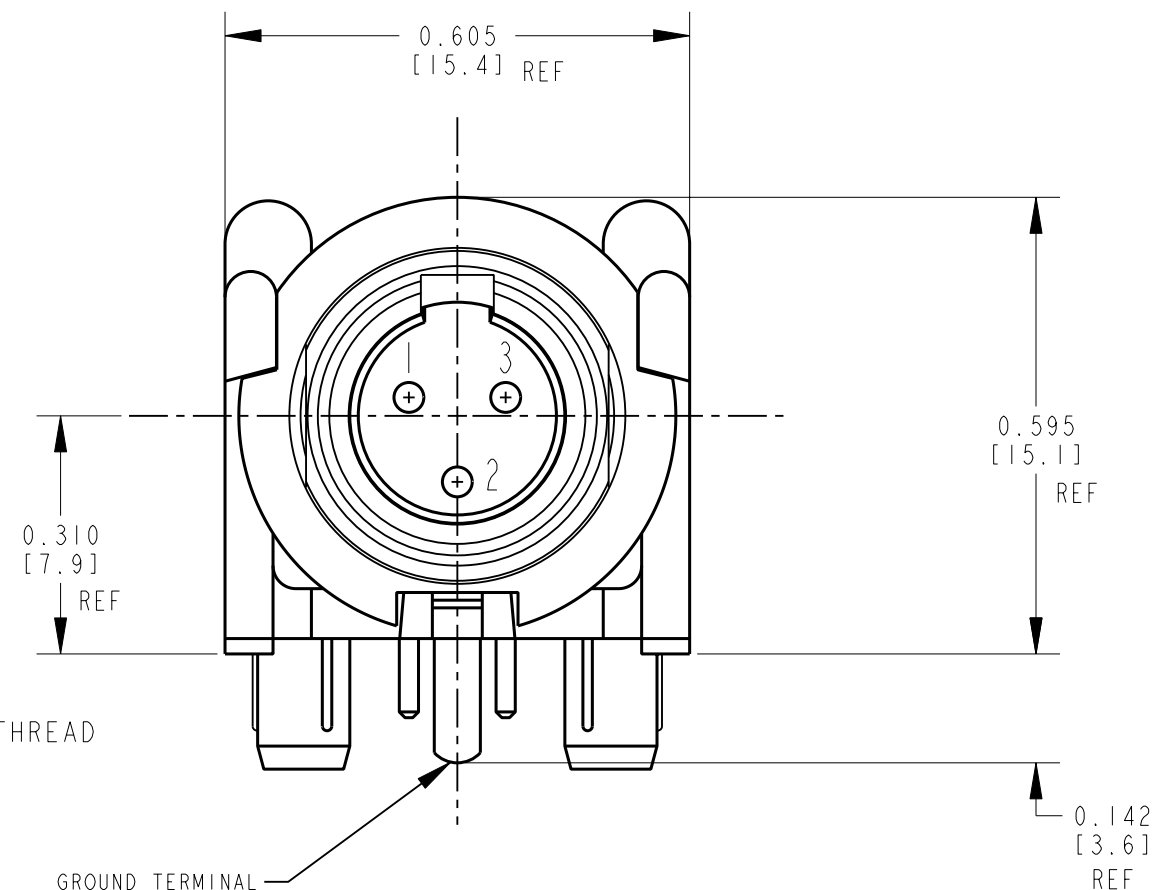


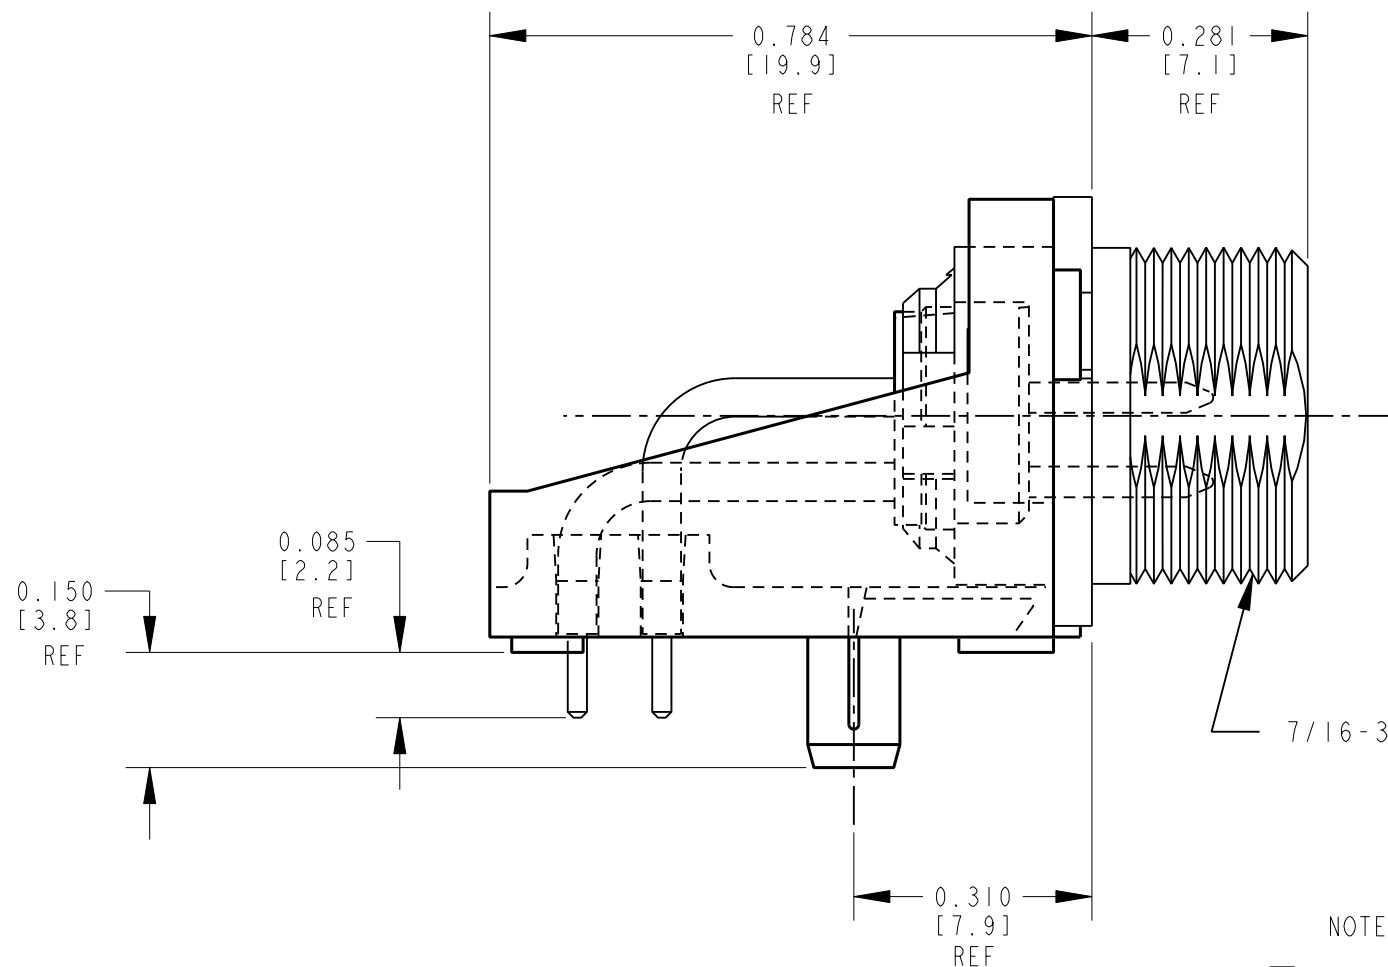

NOTES:

1. MATERIALS:
HOUSING: THERMOPLASTIC
CONTACTS: BRASS; TIN PLATED (TRA3M), GOLD PLATED (TRA3MAU)
HARDWARE: BRASS; NICKEL PLATED
BUSHING: ZINC DIE CAST, NICKEL PLATED
2. ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 5 A
CONTACT RESISTANCE: 0.010 OHM MAX
INSULATION RESISTANCE: 100 MEGA OHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC
MECHANICAL LIFE: 2000 CYCLES
3. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

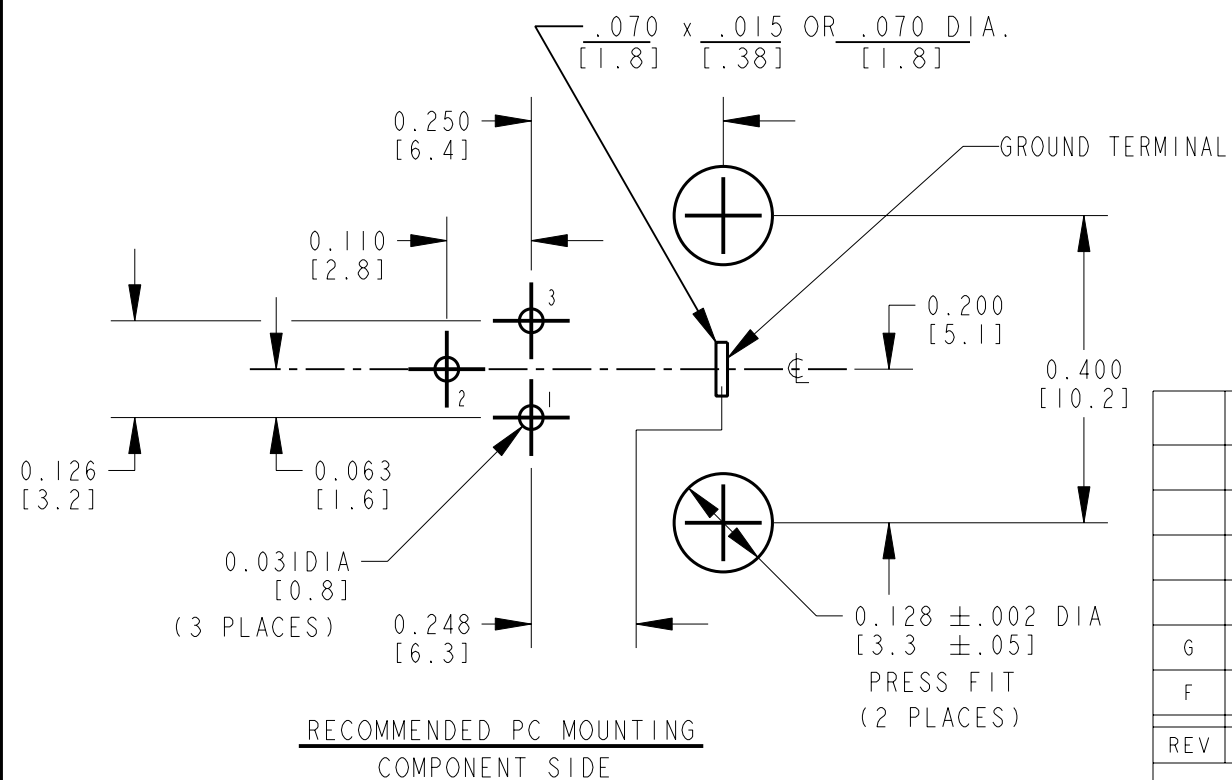

REV	ECO NUMBER	DATE	BY	APVD
G	25183	5-15-08	TJK	BDS
F	ECO #22452	9-16-98	RC	EBR

REVISIONS

★ STAR SYMBOL DENOTES CRITICAL DIMENSION

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS IN INCHES
- TWO PLACE DECIMALS ±0.01
- THREE PLACE DECIMALS ±0.005
- ANGLES ±1°
- ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.
2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002
3. REMOVE ALL BURRS

DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.

SIZE	WIDTH	MULT	LBS/M	TEMPER
FINISH	MATERIAL			
SPEC No.	SPEC No.			
FIRST USED ON		SCALE 4:1		
DATE DRAWN	BY	CHKD	APVD	Switchcraft®
7-6-92	MW	MW 8-27-92	GHJ 8-27-92	
NAME TINI OG CONNECTOR RA PC 3 PIN MALE, RoHS				PART No. TRA3M SERIES
				REV G