
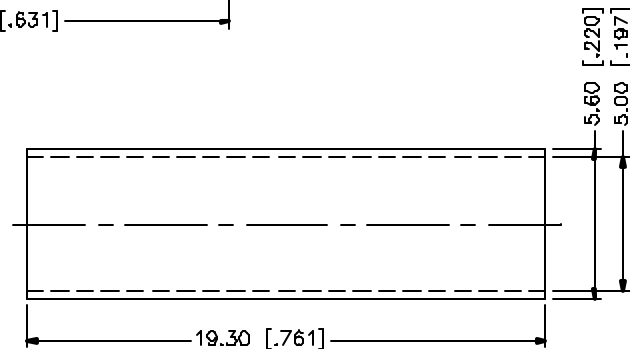
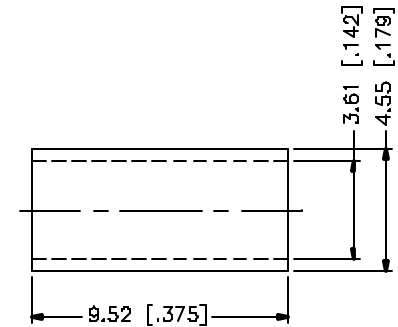

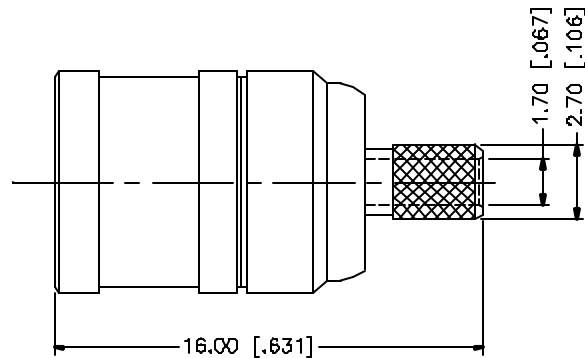


REV.	DATE	DESCRIPTION
D	05/01/04	REFORMAT DRAWING

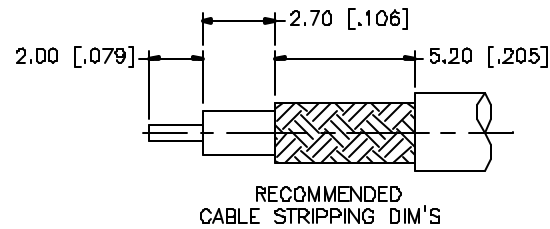

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8					DRAWN	G.R.S.	05/01/04						
7					CHECKED			PART DESCRIPTION SMB CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)					
6					ISSUED								
5					SHEET	1 OF 1		PART NO. 142183					
4	FERRULE	BRASS	NICKEL		1								
3	CONTACT PIN	PHOS. BRONZE	GOLD		1			DWG. NO. 142183.DWG					
2	INSULATOR	TEFLON	NATURAL	1									
1	HOUSING/BODY	BRASS	NICKEL	1					REV. D	SIZE A	SCALE NA		
	DESCRIPTION	MATERIAL	FINISH	QTY			C:/142/142183.DWG						