



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REVISED PER ECO-17-011927	23AUG2017	RS	KR


- 1 MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
- 2 RECOMMENDED PANEL THICKNESS 0.76–2.29 [.029–.090].
- 3 PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- 4 OPTIONAL FOR KEYING HOUSING IN PANEL.
- 5 CIRCUIT NUMBER 1 LOCATION.
- 6 DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- 7 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 8 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- 9 MATERIAL: BLACK NYLON, UL 94V-2 HIGH TEMP.
- 10 PHOSPHOR BRONZE CONTACTS SHOULD ALWAYS BE USED WITH THIS HOUSING.

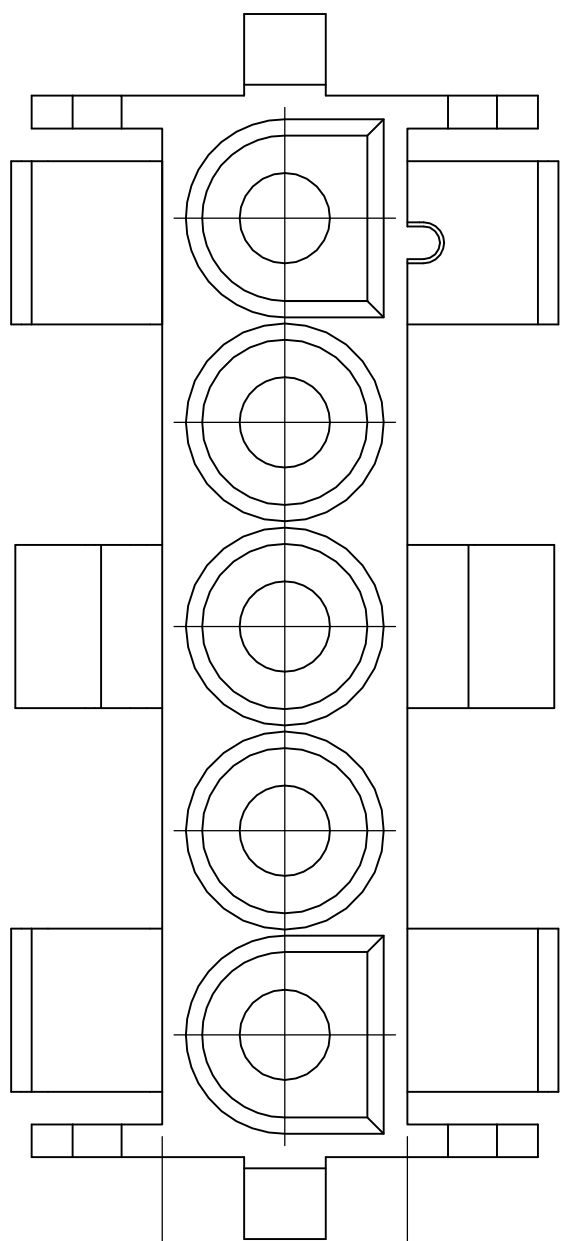


7.62 [.300]

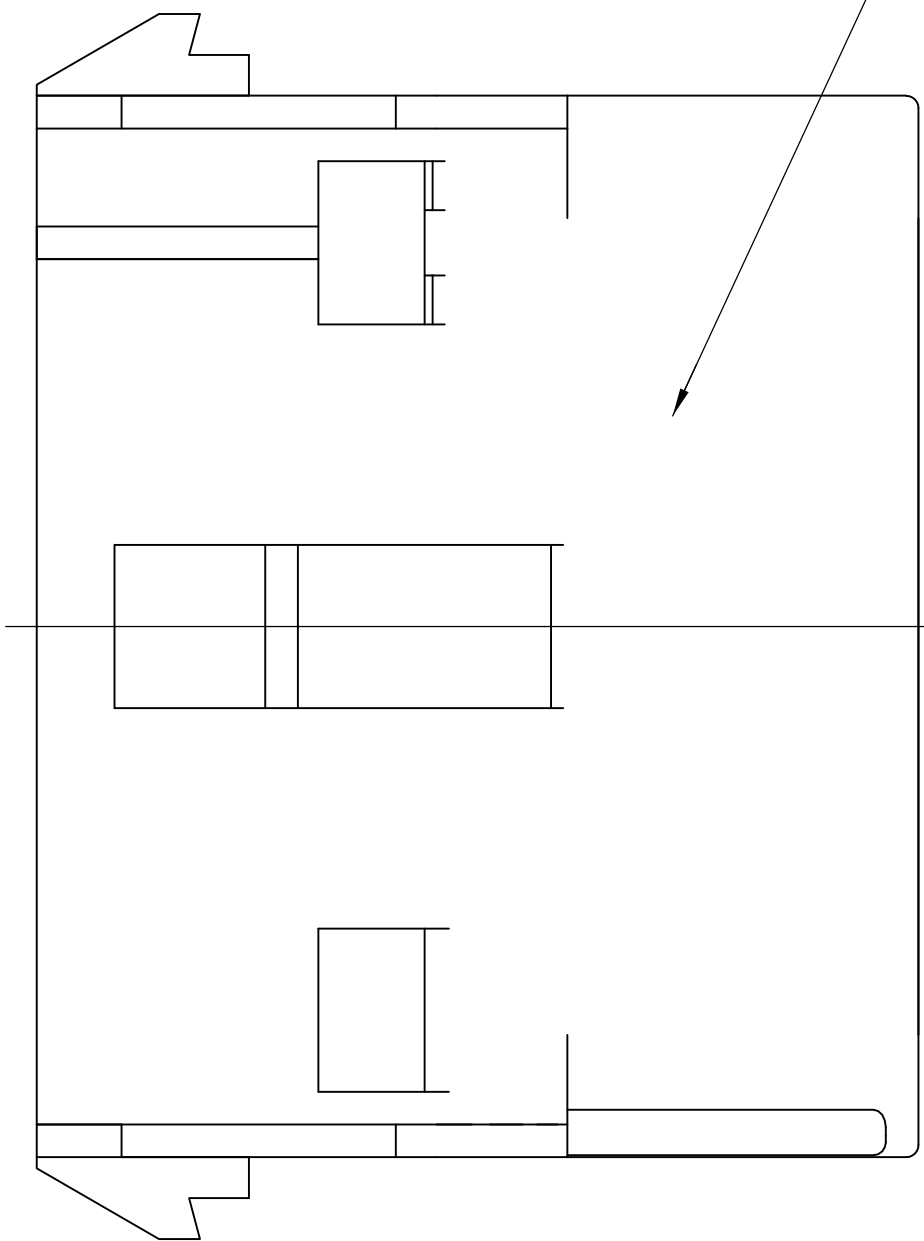



33.02±0.25 [1.300±.010]

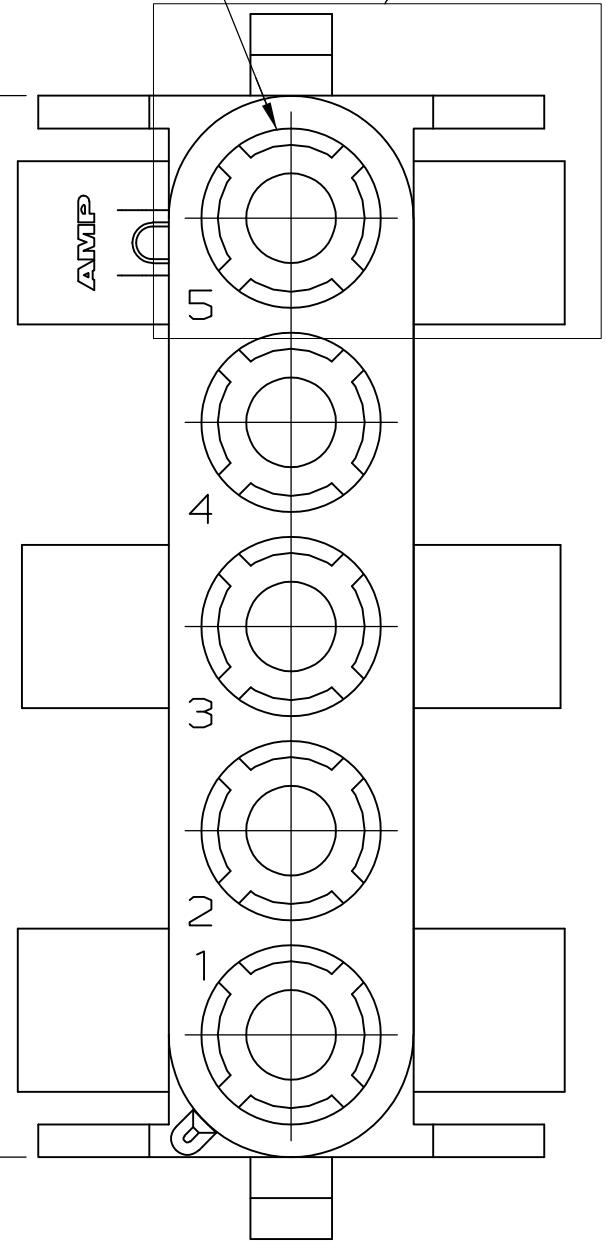


SEE DETAIL A

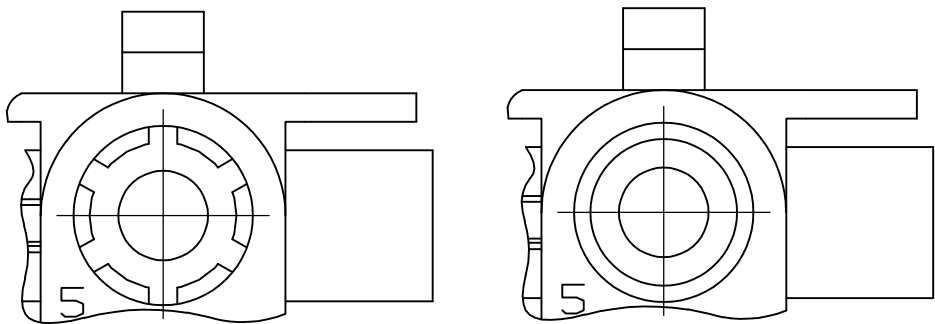

DETAIL E
OPTIONAL CONSTRUCTION

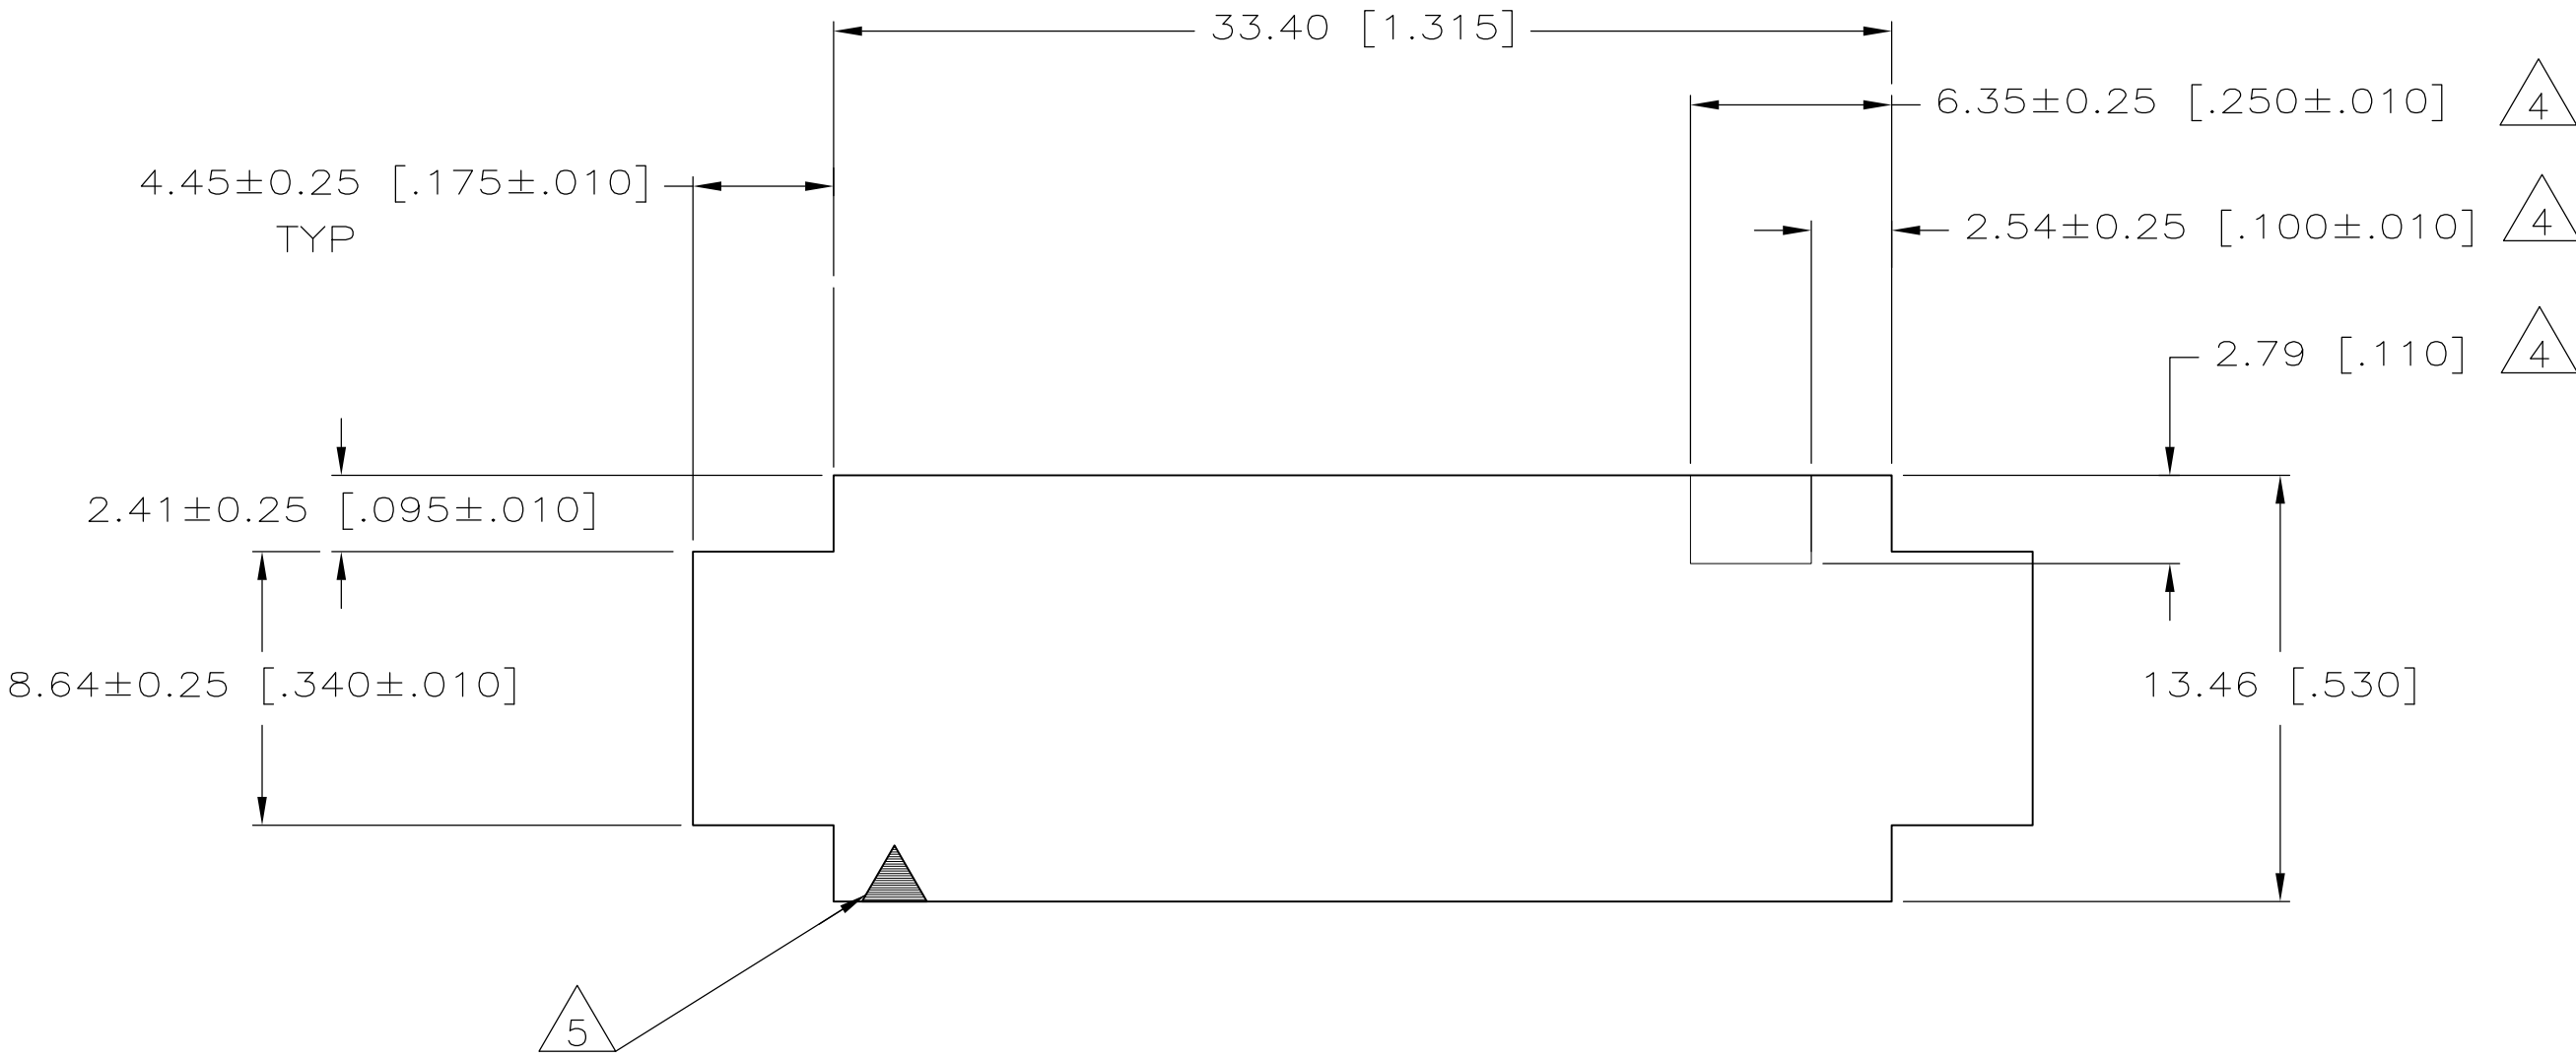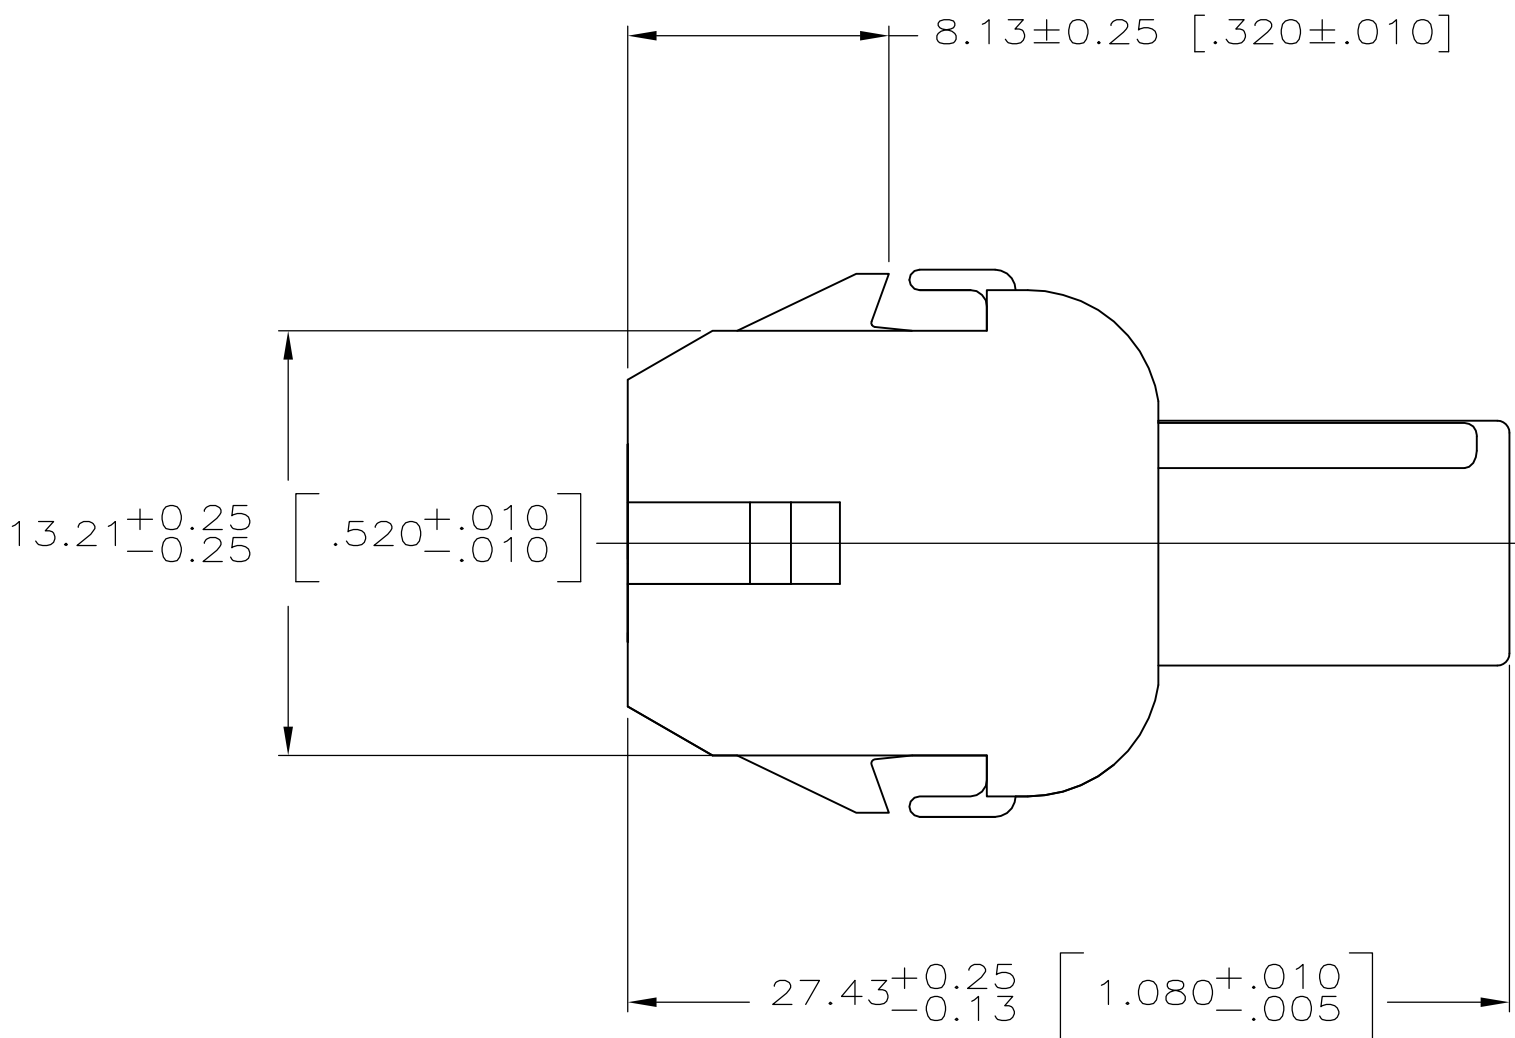

RECOMMENDED PANEL CUT OUT

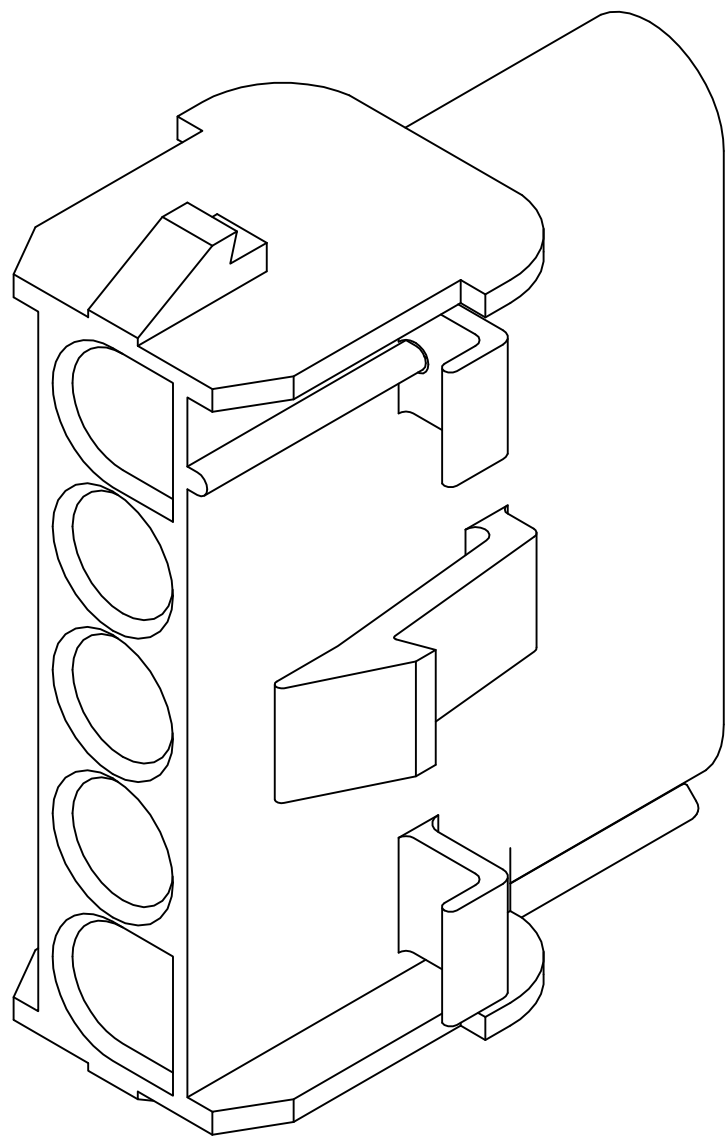

3-DIMENSIONAL MODEL
NTS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 26-FEB-2004	BLACK COLOR		794863-1 PART NUMBER
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 26-FEB-2004	TE Connectivity		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 26-FEB-2004			
0. PLC ± 1. PLC ± 2. PLC ± 0.13 [.005] 3. PLC ± 4. PLC ±		PRODUCT SPEC	NAME CAP, 5 CIRCUIT, UNIVERSAL MATE-N-LOK TM		
ANGLES ± 1° 0'		APPLICATION SPEC	SIZE A1		
MATERIAL 9		WEIGHT 0.000000	CAGE CODE 00779		
		CUSTOMER DRAWING	SCALE 4:1		
			SHEET 1 OF 1		
			REV A2		