

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

COPYRIGHT 20

BY




ALL RIGHTS RESERVED.

REVISIONS

P	LTB	DESCRIPTION	DATE	OWN	APVD
E		ECR-17-012802	06SEP2017	KG	DW

⚠ MATERIAL: PROTECTIVE COVER: TPE, COLOR:BLACK, UL 94 HB. *
FERRULE SUB ASSEMBLY: ZIRCONIA/METAL
COMPRESSION SPRING: STAINLESS STEEL.
CONNECTOR HOUSING: PBT, COLOR:BEIGE, UL 94 V-0. *
PLUG BODY: PAS, COLOR: BEIGE, UL 94 V-0. *
REAR BODY: METAL
BOOT: PP, COLOR:BEIGE, UL 94 V-0. *
CRIMP EYELET/HEAT SHRINK ASSY: ALUM. ALLOY, HEAT SHRINK: POLYOLEFIN, UL VW-I.
CLIP, DUPLEX, TP, COLOR: BLACK
*RATED AT QUALIFYING THICKNESS.

⚠ BULK PACKAGED

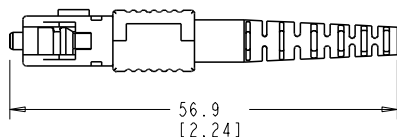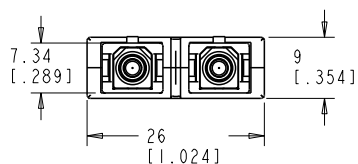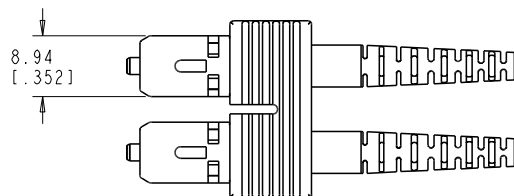

BOOT, BEND LIMITING

CRIMP EYELET/
HEAT SHRINK ASSEMBLY

CONNECTOR SUB ASSEMBLY

CLIP, DUPLEX

2 1828574-2
1828574-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN D. ERDMAN 19APR2005	STE TE Connectivity		
CHK D. ROHDE 19APR2005		APVD B. EDWARDS 19APR2005			
DIMENSIONS: mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME CONNECTOR KIT, SC, DUPLEX, MM, JUMPER, TIGHT JACKET STYLE, 1.6-2.0mm	
		0 PLC ±		SIZE	
		1 PLC ±0.171[0.004]		CAGE CODE	
		2 PLC ±0.011[0.0004]		DRAWING NO	
		3 PLC ±		A200779	
		4 PLC ±		©=1828574	
		ANGLES		RESTRICTED TO	
		FINISH		WEIGHT	
		-		-	
MATERIAL		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 OF 1 REV E	