Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

A-A

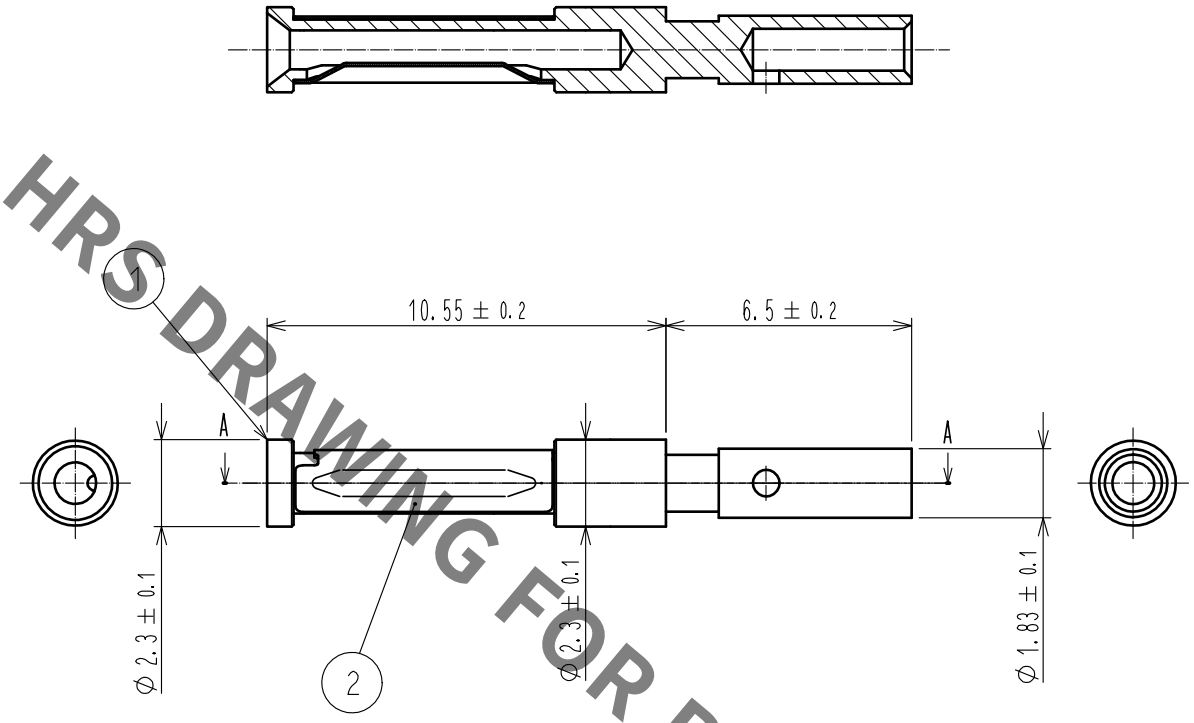

HRS DRAWING FOR REFERENCE

Note 1. This product will be inserted into the TJ50L-4S-UNIT of the TJ*L series.
2. This product is supplied in bags of 100 pcs each.
3. Please crimp the applicable cable (AWG 22、0.3 sq) with the crimping tool (MIL-C-22520/1-01). The locator which will be attached to the crimping tool is TJ50L/CRMD-22LCT (CL250-0040-8-00). For further details regarding the wiring and assembly procedure please refer to the ETAD-E3078 instruction manual.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
1	Brass	Gold plating 0.1μm min.	2	Copper alloy	Gold plating 0.76μm min.

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△0					

HIROSE ELECTRIC CO., LTD.	APPROVED : RI. TAKAYASU	16.04.05	DRAWING NO. EDC-128232-00-00
	CHECKED : AH. KODAMA	16.04.05	PART NO. TJ50L-22SCA
	DESIGNED : TA. TORIHARA	16.04.05	
	DRAWN : TA. TORIHARA	16.04.05	CODE NO. CL236-3210-6-00 △0 1/1

FORM HC0011-5-51