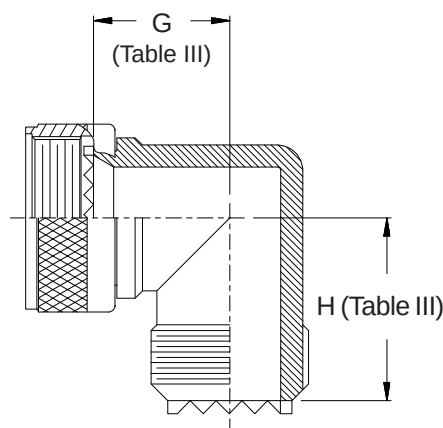
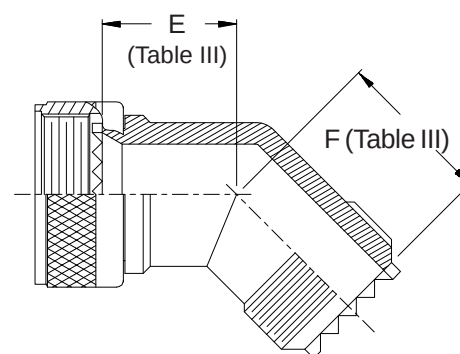
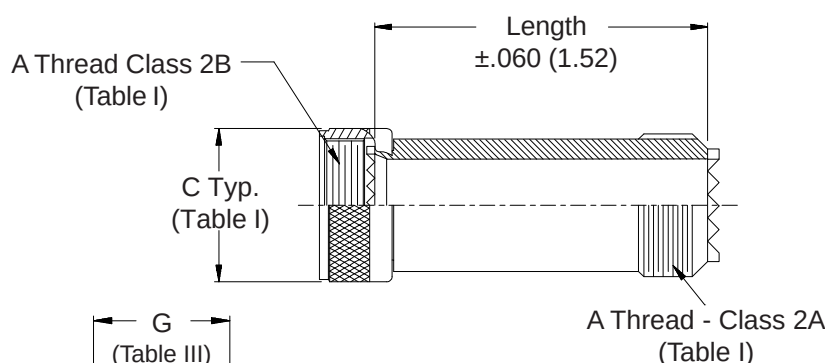
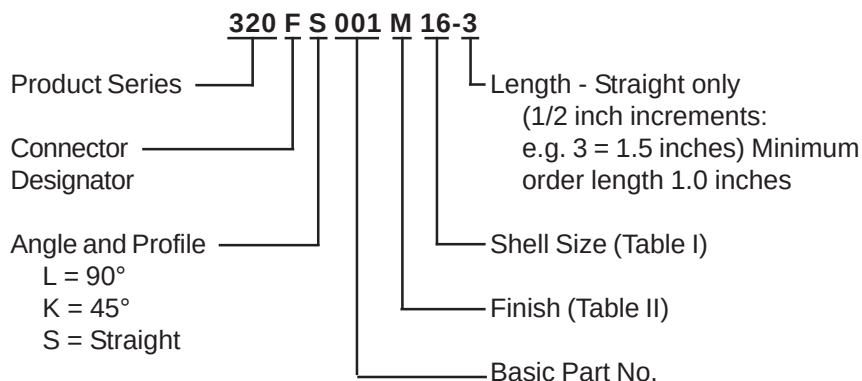


**CONNECTOR  
DESIGNATORS  
A-D-F-H-L-S  
ROTATABLE  
COUPLING**

**TABLE II : STANDARD FINISHES**

| GLENAIR |                                                   |
|---------|---------------------------------------------------|
| SYMBOL  | FINISH                                            |
| B       | Cadmium Plate, Olive Drab                         |
| C       | Anodize, Black                                    |
| G       | Hard Coat, Anodic                                 |
| M       | Electroless Nickel                                |
| NF      | Cadmium Plate, Olive Drab Over Electroless Nickel |

See Back Cover for Complete Finish Information and Additional Finish Options

**-445**

 Now Available  
 with the "NESTOR"

Add "-445" to Specify  
 Glenair's Non-Detent,  
 Spring-Loaded, Self-  
 Locking Coupling.

**TABLE III: DIMENSIONS**

| Shell Size<br>Conn. Desig. |    | G     |        | F     |        | E     |        | H     |        |
|----------------------------|----|-------|--------|-------|--------|-------|--------|-------|--------|
| A-F-L-S                    | H  | Max   |        | Max   |        | Max   |        | Max   |        |
| 08                         | 09 | .940  | (23.9) | .890  | (22.6) | .830  | (21.1) | 1.000 | (25.4) |
| 10                         | 11 | 1.010 | (25.7) | .920  | (23.4) | .860  | (21.8) | 1.070 | (27.2) |
| 12                         | 13 | 1.070 | (27.2) | .942  | (23.9) | .882  | (22.4) | 1.130 | (28.7) |
| 14                         | 15 | 1.130 | (28.7) | .970  | (24.6) | .900  | (22.9) | 1.190 | (30.2) |
| 16                         | 17 | 1.190 | (30.2) | .990  | (25.1) | .930  | (23.6) | 1.250 | (31.8) |
| 18                         | 19 | 1.240 | (31.5) | 1.010 | (25.7) | .950  | (24.1) | 1.300 | (33.0) |
| 20                         | 21 | 1.310 | (33.3) | 1.040 | (26.4) | .980  | (24.9) | 1.370 | (34.8) |
| 22                         | 23 | 1.360 | (34.5) | 1.060 | (26.9) | 1.000 | (25.4) | 1.420 | (36.1) |
| 24                         | 25 | 1.540 | (39.1) | 1.090 | (27.7) | 1.030 | (26.2) | 1.490 | (37.8) |

See inside back  
 cover fold-out or  
 pages 13 and 14  
 for unabridged  
 Tables I and II.

Metric dimensions  
 (mm) are indicated in  
 parentheses.



**320-002**  
**Extender Backshell**  
 Standard Profile - Direct Coupling - Straight Only



**CONNECTOR  
 DESIGNATORS**  
**A-B\*-C-D-E-F**  
**G-H-J-K-L-S**

\* Conn. Design. B See Note 2

**DIRECT  
 COUPLING**

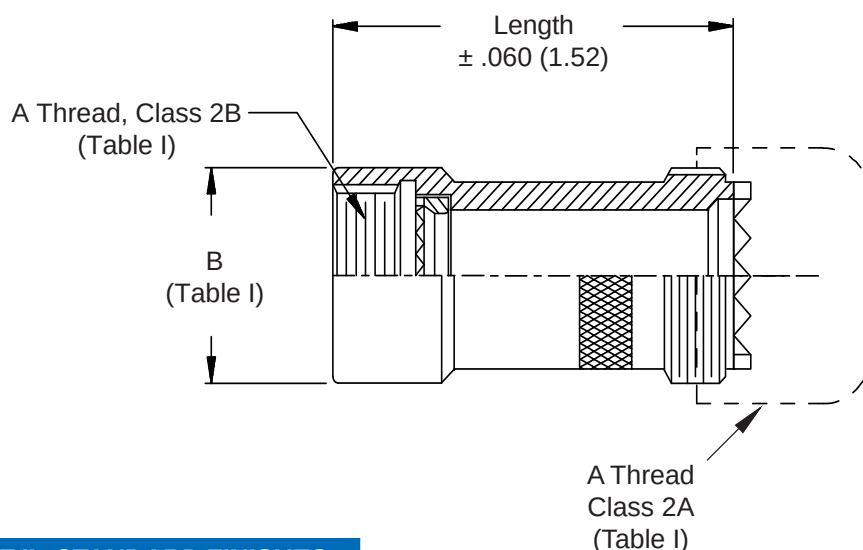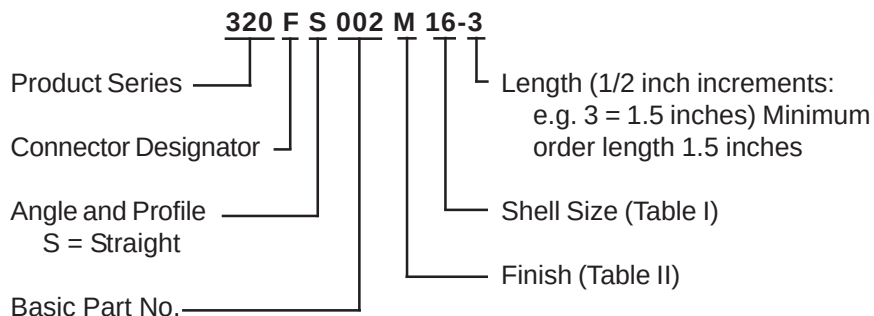

**TABLE II : STANDARD FINISHES**

| GLENAIR |                                                   |
|---------|---------------------------------------------------|
| SYMBOL  | FINISH                                            |
| B       | Cadmium Plate, Olive Drab                         |
| C       | Anodize, Black                                    |
| G       | Hard Coat, Anodic                                 |
| M       | Electroless Nickel                                |
| NF      | Cadmium Plate, Olive Drab Over Electroless Nickel |

See Back Cover for Complete Finish Information and Additional Finish Options

**See inside back cover  
 fold-out or pages 13 and  
 14 for unabridged  
 Tables I and II.**

1. Metric dimensions (mm) are indicated in parentheses.
2. When using Connector Designator B refer to pages 18 and 19 for part number development.