
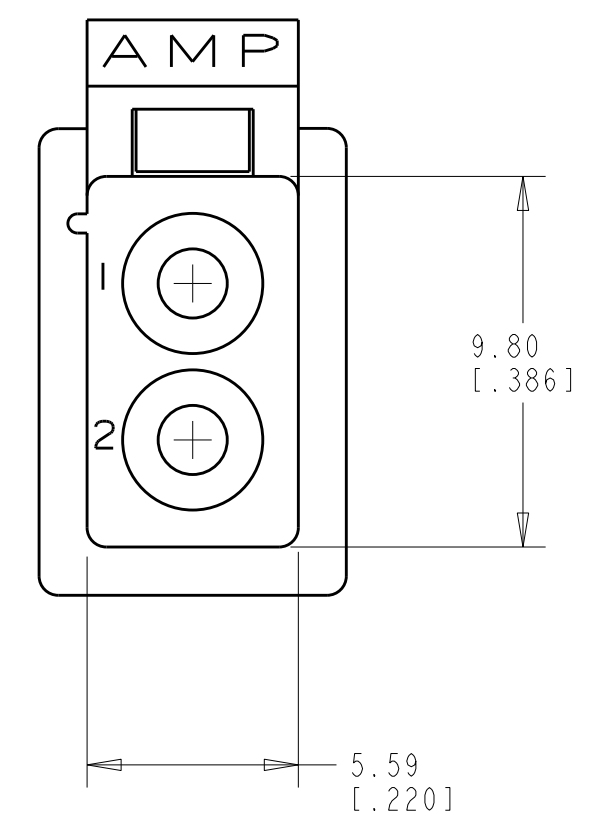


|     |      |           |     |                           |           |     |      |
|-----|------|-----------|-----|---------------------------|-----------|-----|------|
| LOC | DIST | REVISIONS |     |                           |           |     |      |
| CM  | 00   | P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|     |      |           | C   | REVISED PER ECR-12-017444 | 27NOV2017 | BW  | SG   |
|     |      |           |     |                           |           |     |      |
|     |      |           |     |                           |           |     |      |
|     |      |           |     |                           |           |     |      |

 GWT 750° (WITH OUT FLAME) ACC. IEC 60335-1



|                                                                                       |         |                 |             |
|---------------------------------------------------------------------------------------|---------|-----------------|-------------|
|  | NATURAL | PA 6 UL94-V2    | 794894-3    |
|  | RED     | PA 6 UL94-V2    | 794894-2    |
|                                                                                       | NATURAL | PA66/6 UL94 V-0 | 794894-1    |
| REMARKS                                                                               | COLOUR  | MATERIAL        | PART NUMBER |

|                                                                                       |  |                                                                                                                                      |  |                                                                                                                                                                     |  |
|---------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |  | DWN 26-JAN-2001<br>K. WHITAKER<br>CHR 26-JAN-2001<br>C. JONES<br>APVD 26-JAN-2001<br>C. JONES                                        |  | REMARKS COLOUR MATERIAL PART NUMBER<br><div>        TE Connectivity     </div> |  |
| DIMENSIONS:<br>mm [ INCHES ]                                                          |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>0 PLC ±<br>1 PLC ±<br>2 PLC ±0.13 [.005]<br>3 PLC ±<br>4 PLC ±<br>ANGLES ±0° 30'<br>FINISH |  | NAME<br>PLUG,<br>2 CIRCUIT, SEALED APPLICATION,<br>MINI UNIVERSAL MATE-N-LOK(TM)                                                                                    |  |
|  |  | PRODUCT SPEC<br>-<br>APPLICATION SPEC<br>-<br>WEIGHT -                                                                               |  | SIZE CAGE CODE DRAWING NO RESTRICTED TO<br>A2 00779 C-794894 -                                                                                                      |  |
| MATERIAL<br>SEE TABLE                                                                 |  | CUSTOMER DRAWING                                                                                                                     |  | SCALE 5:1 SHEET 1 OF 1 REV C                                                                                                                                        |  |