


 **1** RECOMMENDED SPARE PARTS.

2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.

3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4 POSITION REAR STRIP GUIDE IN INSULATION BARREL TRANSITION.

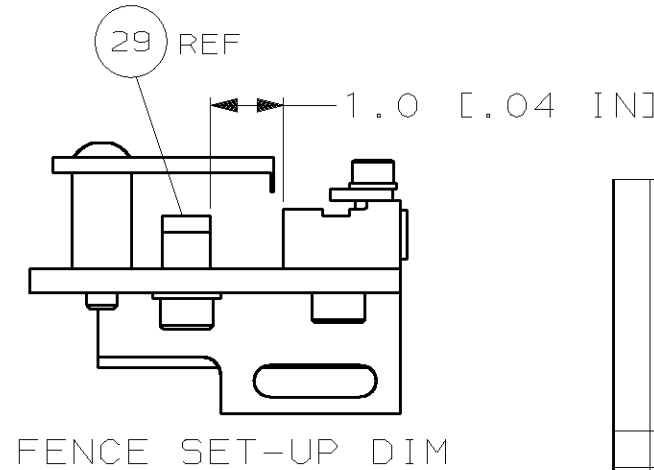

	B	ECN 0150-1267-03	
	A	SEE ECN 015A-0581-01	
P F	LTR	REVISION RECORD	

QTY REQD PER ASSY				PARTS LIST							
		DIMENSIONS: mm [INCHES] DO NOT SCALE PRINT. TOLERANCES UNLESS OTHERWISE SPECIFIED: 1 PLC DEC +0.5 [-0.2 IN] 2 PLC DEC ± 3 PLC DEC ± ANGLES ± SURF TEXTURE: ✓		MATL - DR 14JUN01 L:LOFHOUSE CHK -		HT TR - APP 14JUN01 F:BACKHURST REL 18JUL01 L:LOFHOUSE		FIN -  AMP Incorporated Harrisburg, PA 17105-3608			
TE	11-03	REMOVE BURRS, BREAK SHARP EDGES RO.38 MAX		NAME SIDE FEED HD-I APPLICATOR				MACHINE REF HD-I APPL			
L/JL	JUL01			SCALE -		D DWG NO 1426215		SHEET 1 of 1 REV B			
APP	DATE	CASE CODE 00779		CUSTOMER AND ASSEMBLY DRAWING						RESTRICTED TO -	