
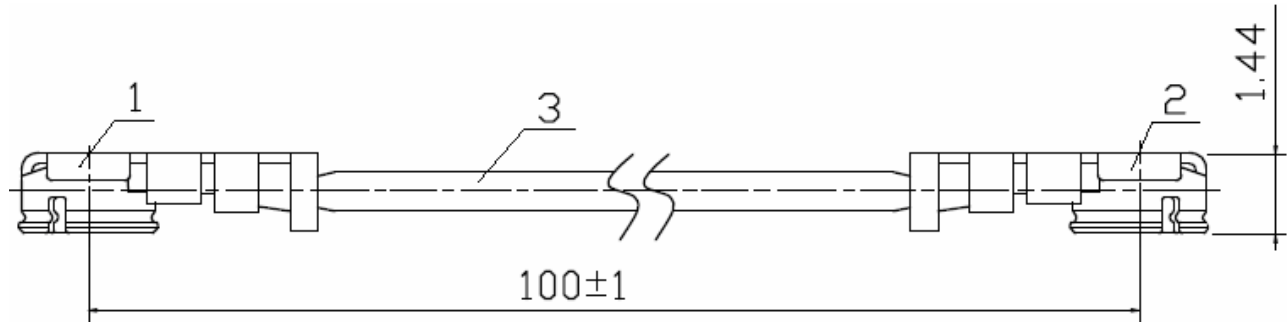


PLUG-PLUG MML H2.0
R302.205.000
CABLE 1.13/50 S-BR, LENGTH 10CM

 Series : **MML**


All dimensions are in mm.



- * 1 * Connector A : **MML PLUG(gold plated) H2.0**
- * 2 * Connector B : **MML PLUG(gold plated) H2.0**
- * 3 * Cable : **1.13/50 S BLACK**

ELECTRICAL CHARACTERISTICS

Impedance	50 Ω
Frequency	0-3 GHz
Operating temperature	-40/+90 ° C
VSWR	1.5 + 0,000 x F(GHz) Maxi
Insertion loss	0.12 √F(GHz) dB Maxi
Voltage rating	200 Veff Maxi
Dielectric withstanding	200 Veff mini
Insulation resistance	500 MΩ mini

SPECIFICATION

Weight	0,4000 g
Cable retention	12.74 N mini
Mating life	30 Cycles
Others :	

RADIAL 

Edition : 1020 A

Design changes may be in order to improve the product.