

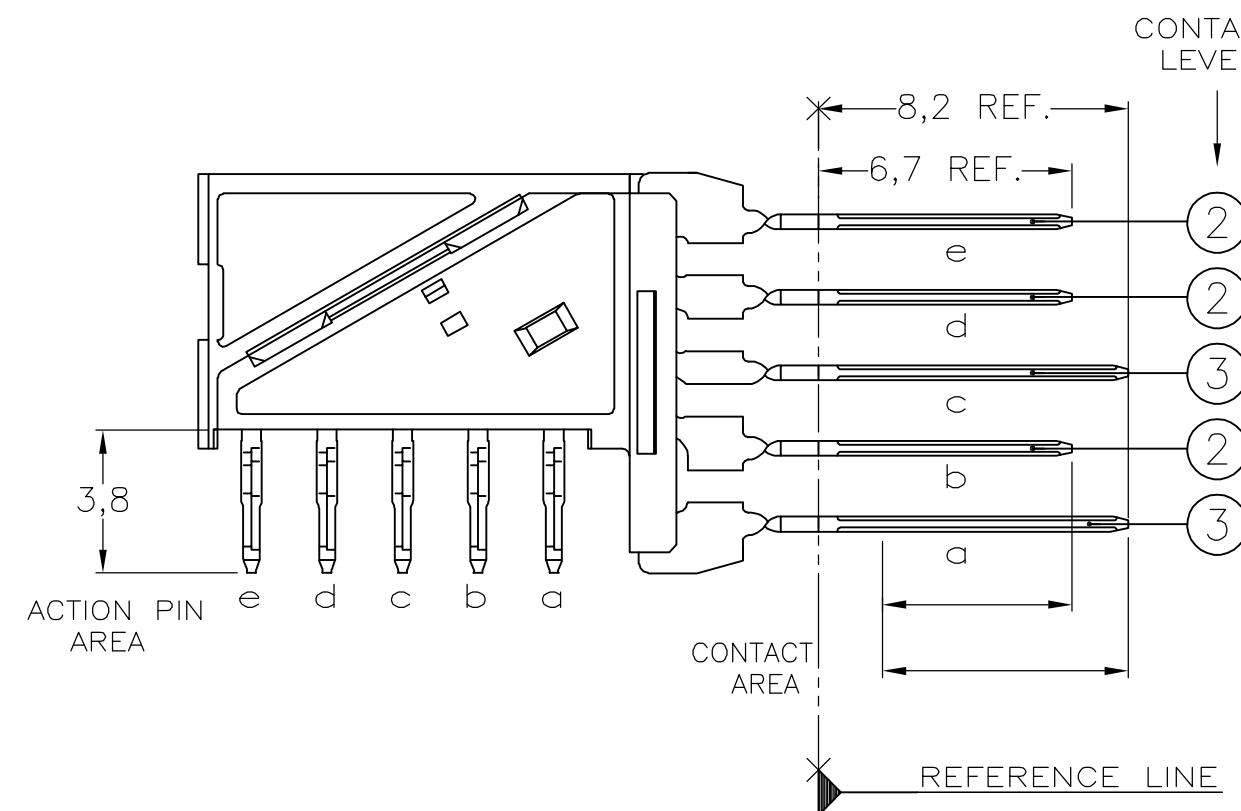


CONTACT DIMENSIONS

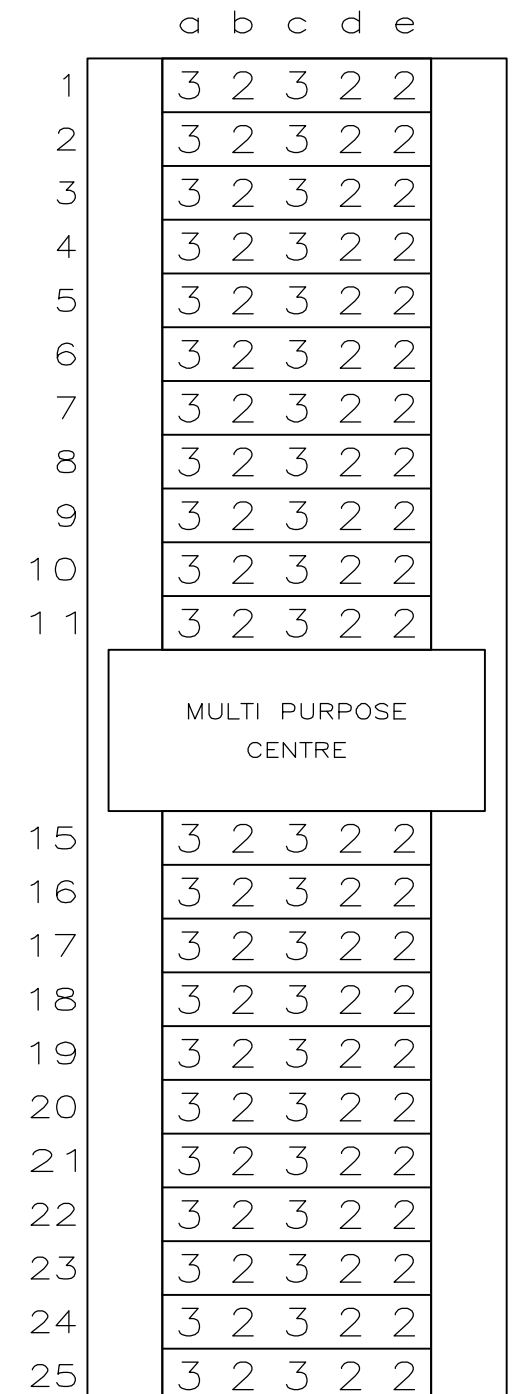

CONTACT LAYOUT

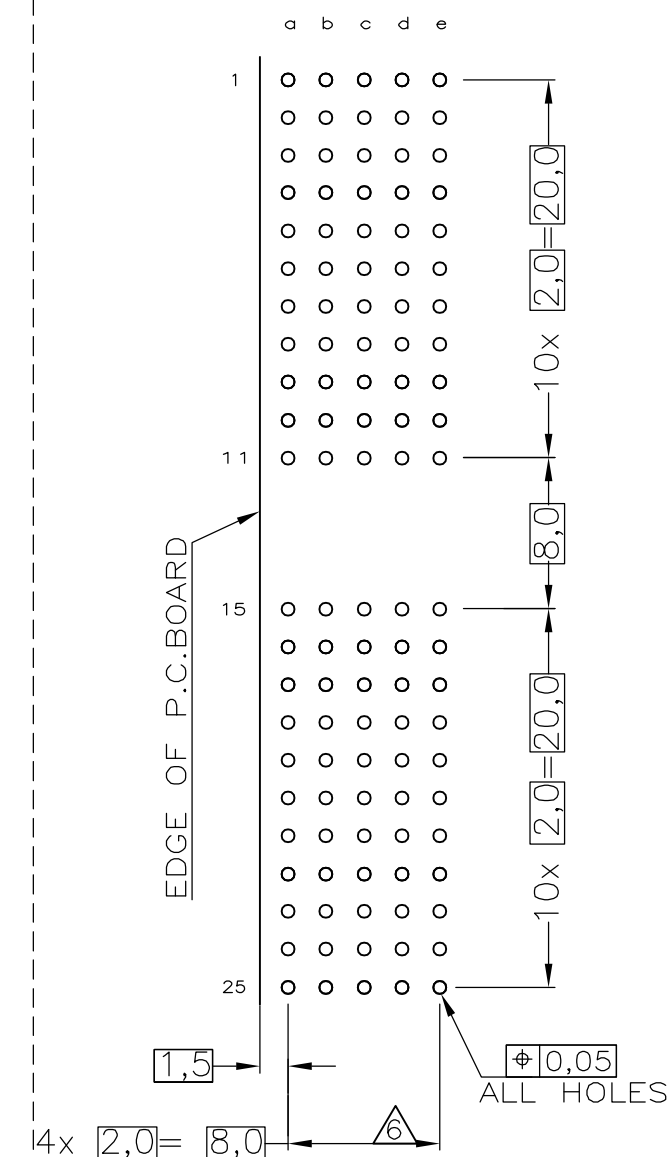

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE APPLICATION SPECIFICATION

①	MATERIAL HOUSING	: GREY GLASSFILLED POLYESTER UL-RATING V0
②	CONTACT	: PHOSPHORBRONZE
③	GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.	
④	CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.	
⑤	CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.	
⑥	CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE	
⑦	PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.	
⑧	AREA FOR KEYING PART (BASIC PART NUMBER 100525).	

		1-352227-1 
		352227-1
CONTACT FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.V.d.HEIJDEN 15DEC97		 Tyco Electronics Corporation s-Hertogen Bosch, Netherlands,	
DIMENSIONS: MM		CHK D. TRUREN 15DEC97		NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.V.KONINGSBRUGGE		Z-PACK 2MM HM TYPE A	
		PRODUCT SPEC		110 POS. RIGHT ANGLE MALE CONNECTOR ASSEMBLY	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± ± -		APPLICATION SPEC 114-19029		SIZE	RESTRICTED TO
MATERIAL		WEIGHT		CAGE CODE	DRAWING NO
FINISH		—		A2 00779	C-352227
CUSTOMER DRAWING				SCALE	REV
				NTS	D1