
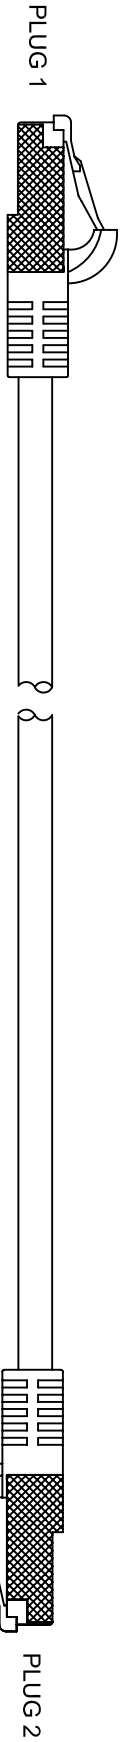


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REVISIONS		
REV.	DESCRIPTION	DATE
A	NEW RELEASE	2/APR/2014

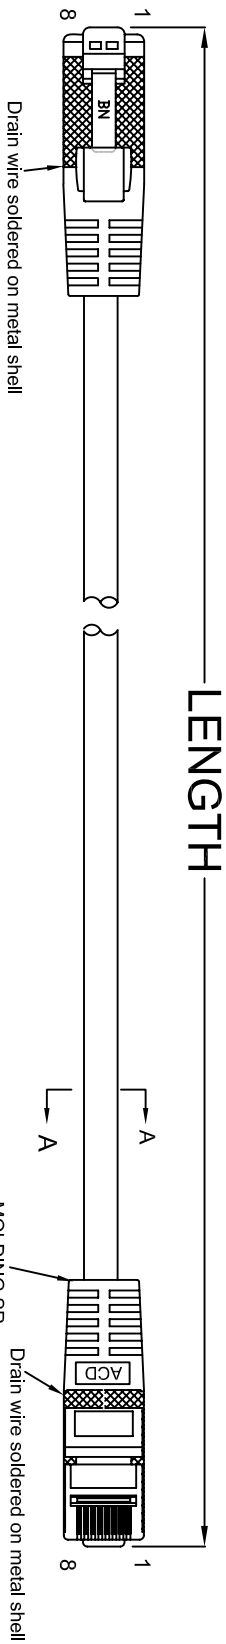


CAT.6A FTP LAN CABLE:

1. Conductor (Stranded): 26AWG (7X0.16mm);
2. Insulation: HD-PE;
3. Color Code:
PAIR 1: Blue & White/Blue
PAIR 2: Orange & White/Orange
PAIR 3: Green & White/Green
PAIR 4: Brown & White/Brown
4. Al/Mylar: Coverage 100%; Overlap 25%/min;
5. Drain: 7/0.16±0.01mm Tinned Copper;
6. Cable Marking:

Amphenol Cables on Demand TYPE CM 26AWG 4PR 75° C
(UL) c(UL) E314104 TIA/EIA-568-B-2-10 FTP CAT.6A

7. Rated Temperature: 75° C.
8. Rated Voltage: 300V.
9. UL cUL CM TYPE.
10. Impedance: 100±15% Ω (1~500 MHz)
11. DC-Resistance Capacitance Unbalance: 5 %
12. DC-Resistance: 14.8Ω/100m AT 20° C MAX
13. Bandwidth: 500 Mhz
14. Bending Radius: 25.4mm (1") min
15. Transmission Requirements TIA/EIA-568-B-2-10 PATCH CORD

Length Tolerance:
Length ≤ 0.5M +30/-0mm
Length > 0.5M & < 1M +50/-0mm
Length ≥ 1M & ≤ 5M +/-50mm
Length > 5M & < 10M +/-100mm

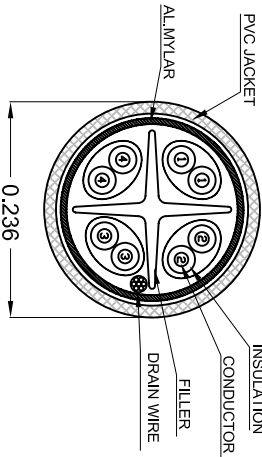

PIN OUT: T568B		
PLUG 1	PLUG 2	COLOR
PIN 1	PIN 1	WHITE/ORANGE
PIN 2	PIN 2	ORANGE
PIN 3	PIN 3	WHITE/GREEN
PIN 4	PIN 4	BLUE
PIN 5	PIN 5	WHITE/BLUE
PIN 6	PIN 6	GREEN
PIN 7	PIN 7	WHITE/BROWN
PIN 8	PIN 8	BROWN
Shielded	Shielded	DRAIN WIRE



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			TOLERANCES ARE:		
DECIMALS	±X	ANGLES	±X°	APPROVALS	DATE
.X	±.X			LF	2/APR/2014
.XX	±.XX			CHECKED	BA
.XXX	±.XXX			RESP ENG	2/APR/2014
THIRD ANGLE PROJECTION					
DRAWN					
MFG ENG					
Amphenol Cables on Demand 20 VALLEY ST. ENDICOTT, NY 13760			ASM CBL RJ45/RJ45 FTP CAT.6A		
SIZE DWG. NO.			MP - 6ARJ45SNNX		
A			REV. A0		

NOTES: UNLESS OTHERWISE SPECIFIED