
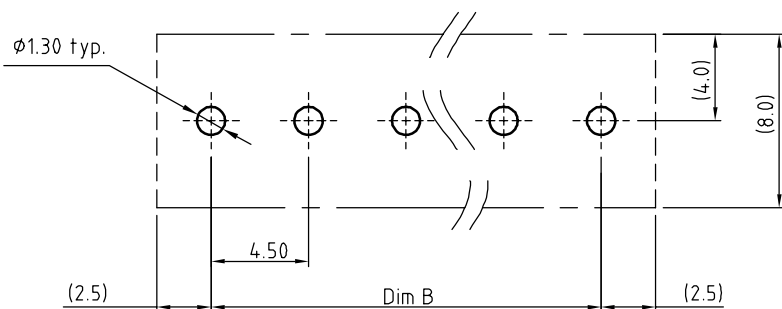
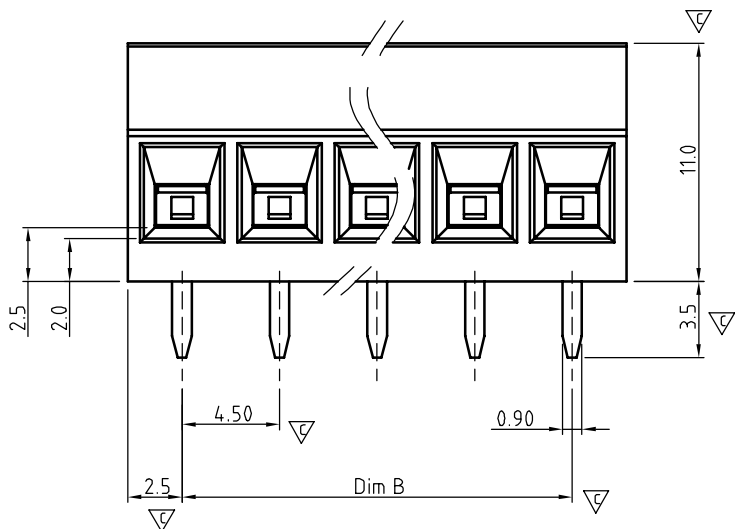


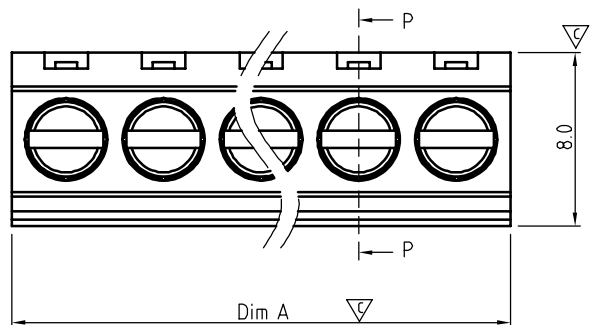


P.C.B. LAYOUT
TOP VIEW

DIMENSION

Dim A	$N \times 4.50 \pm 0.50$
Dim B	$(N-1) \times 4.50$

N=Number of poles

Poles	Tolerance
2p-6p	± 0.10
7p-12p	± 0.20
13p-18p	± 0.30
19p-24p	± 0.40

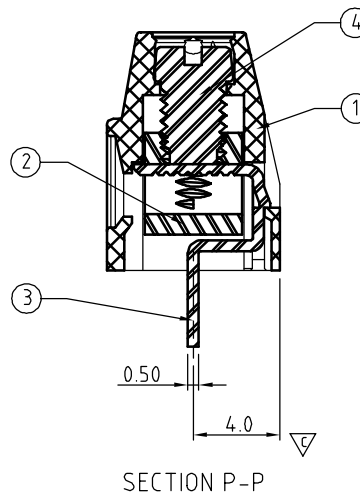

SECTION P-P

SIGN	DATE	DESCRIPTION	APPROVER
△	03/09'13	update the drawing	Guoxue
△			
△			
△			
△			
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item 1 Terminal housing: Thermoplastic (UL 94V-0)
- Item 2 Clamp: Brass ,Ni plated
- Item 3 Wire guard solder pin: Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"- "slot type
-

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 16-24
 - Stranded wire(AWG): 16-24
- △ Torque: 2.7 Lb-In
- Screw: M3.0
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- △ Soldering temperature: 260°C $\pm 5^\circ\text{C}/5\text{ Sec}$
- △ Safety Approval: 
- △ Critical dimension: 

K6 xx 01 x 0 xxxx G

**G RoHS compliant
(lead<4%)
In copper Alloy**

No. of poles	0 Black (RAL9005)	0000:"@ "Logo (Standard)
02 2 POLES	2 Red (RAL3001/D)	000A:"ANYTEK"Logo
03 3 POLES	3 Orange(RAL2011/P)	Any special item by
... ..	4 Yellow(RAL1018/A)	customer request,
24 24 POLES	5 Green(RAL6018/T)	please contact sales
	6 Blue (RAL5015/A)	department.
	8 Grey(RAL7035/D)	
	9 White(RAL1102)	
	C Green(RAL6018/U)	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K6-4.5 mm Series (2P-24P)					
PART NO.	K6xx01x0xxxxG			DWG NO.	8K60001	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Guoxue 2013.03.11	Guoxue 2013.03.11		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
					SHEET: 01/01	X.XX ±0.10
					REV.: C	X° ±1°