

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

2015

© COPYRIGHT 1997

BY TE CONNECTIVITY


ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
C		REVISED PER E.O. P17423	05SEP2001	SB	RDR
D		REVISED PER E.O. P17811	24JUL2002	XS	RDR
E		REVISED PER E.O. P21412	20JUL2012	AM	RDR
F		REVISED PER ECO-14-019072	23FEB2015	JA	DM

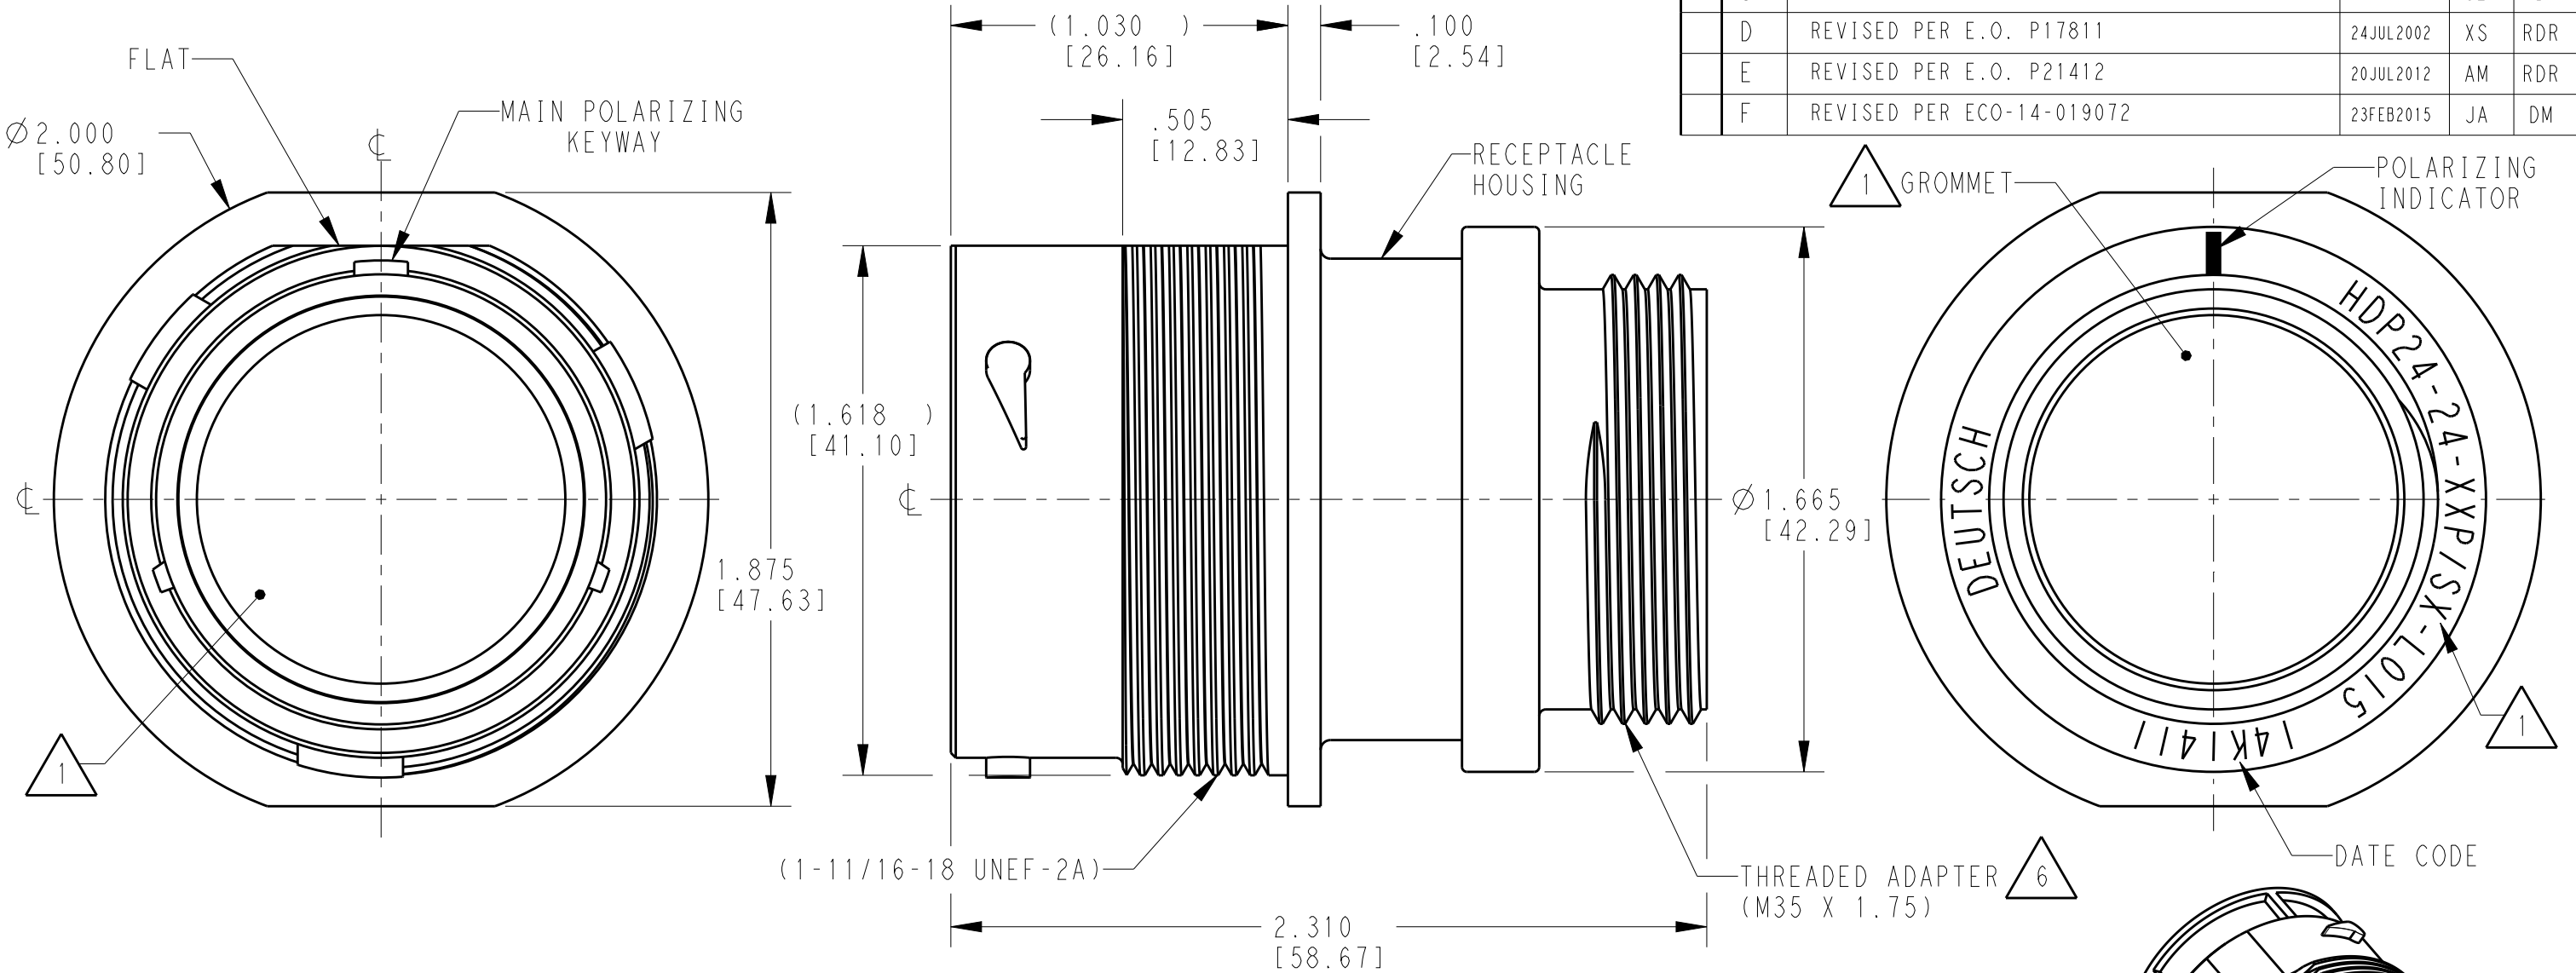

5. RECEPTACLE IS SUPPLIED WITH DUST CAP (2415-001-2405).

4 MATERIAL: RECEPTACLE HOUSING: PA66 GF10 (BLACK)
CONDUIT ADAPTER: PA66 GF10 (GREEN, GRAY, BLUE)
GROMMET: SILICONE (ORANGE-RED)

3 SEE 0425-021-0000 APPLICATION SPECIFICATION
A. RECOMMENDED WIRE INSULATION RANGE
B. CONTACT REMOVAL TOOLS
C. RECOMMENDED MOUNTING HOLE & PANEL THICKNESS
D. MOUNTING HARDWARE & MOUNTING TORQUE.


2. THIS RECEPTACLE MATES WITH HDP26-24-XXP/SX-XXXX PLUG
X = SEAL TYPE (N,T,E)
XX = INSERT ARRANGEMENT
XXXX = MODIFICATION

1 SEE CUSTOMER DRAWING, 0425-014-2400 FOR AVAILABLE INSERT ARRANGEMENTS AND PART NUMBERS.

NOTES:

7. PART MODIFICATION: THREADED ADAPTER

6 CONDUIT ADAPTER ACCEPTS EITHER TYPES:
A. CONDUIT ADAPTER CAP NUT (CN21) AND SEAL RING (SRN21)
B. BACKSHELL (M902-2243)
COMPRESSION NUT (M902-2053)
CABLE Ø .430-.570 [10.92-14.78]
C. BACKSHELL (M902-2244)
COMPRESSION NUT (M902-2054)
CABLE Ø .570-710 [14.78-18.03]

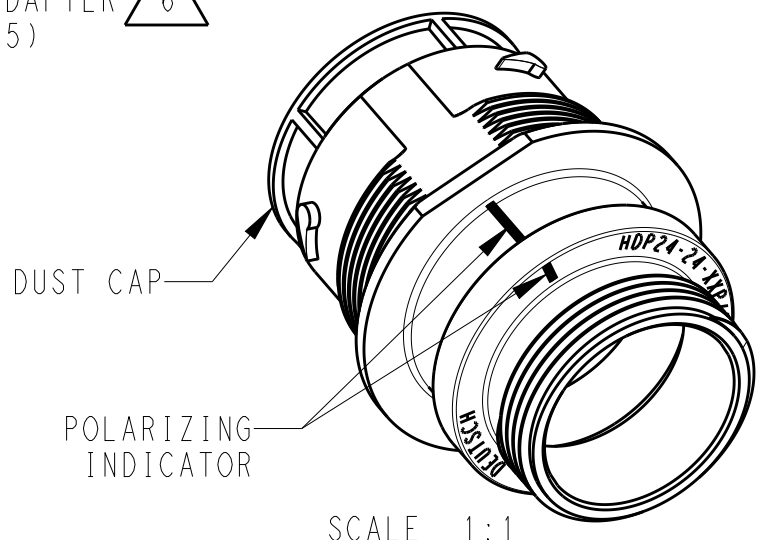

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN STEVE BEARD 04SEP1997	TE Connectivity	
DIMENSIONS: INCHES[mm]		CHK PAUL BURKE 19JUL2002	NAME RECEPTACLE, THREADED SIZE 24, -L015 MOD HDP SERIES	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD STEVE BEARD 23JUL2002	SIZE A3	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.015 [0.38] 4 PLC ± ANGLES ±0°30'0"		PRODUCT SPEC 0425-021-0000	CAGE CODE 4AFU8	
MATERIAL 4		FINISH N/A	DRAWING NO G-HDP24-24-XXP/SX-L015	
		WEIGHT	RESTRICTED TO	
		Customer Drawing	SCALE 2:1	
			SHEET 1 OF 1	
			REV F	