

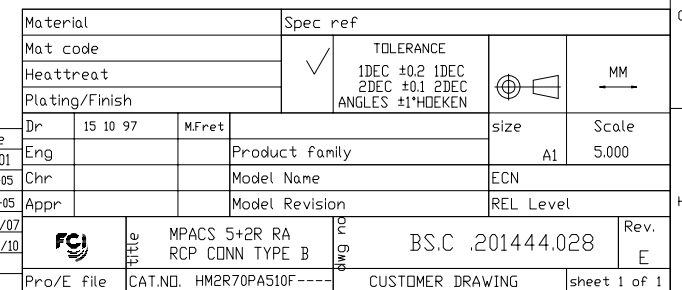


1.5 A AT 20°C (FULLY LOADED)
CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE: 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE : 20 m Ω MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN /CONT
INSULATION RESISTANCE: 10⁴ MΩ MIN

- NOTES
1.  LEAD FREE INDICATOR :LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BSC ,201844.003)
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- 3 .FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-22-008

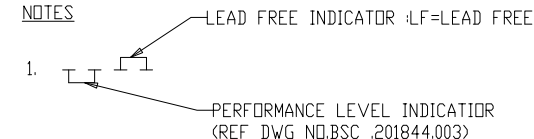

rev	ecn no	dr	date
A	CONVERSION REVISION 01	KN	14-9-11
B	I05-0093	MINI	11-06-11
C	DG05-0278	kason	02-08-11
D	DG07-0362	kason	05/09/11
E	DG10-0110	NZ	05/30/11