THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:
1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

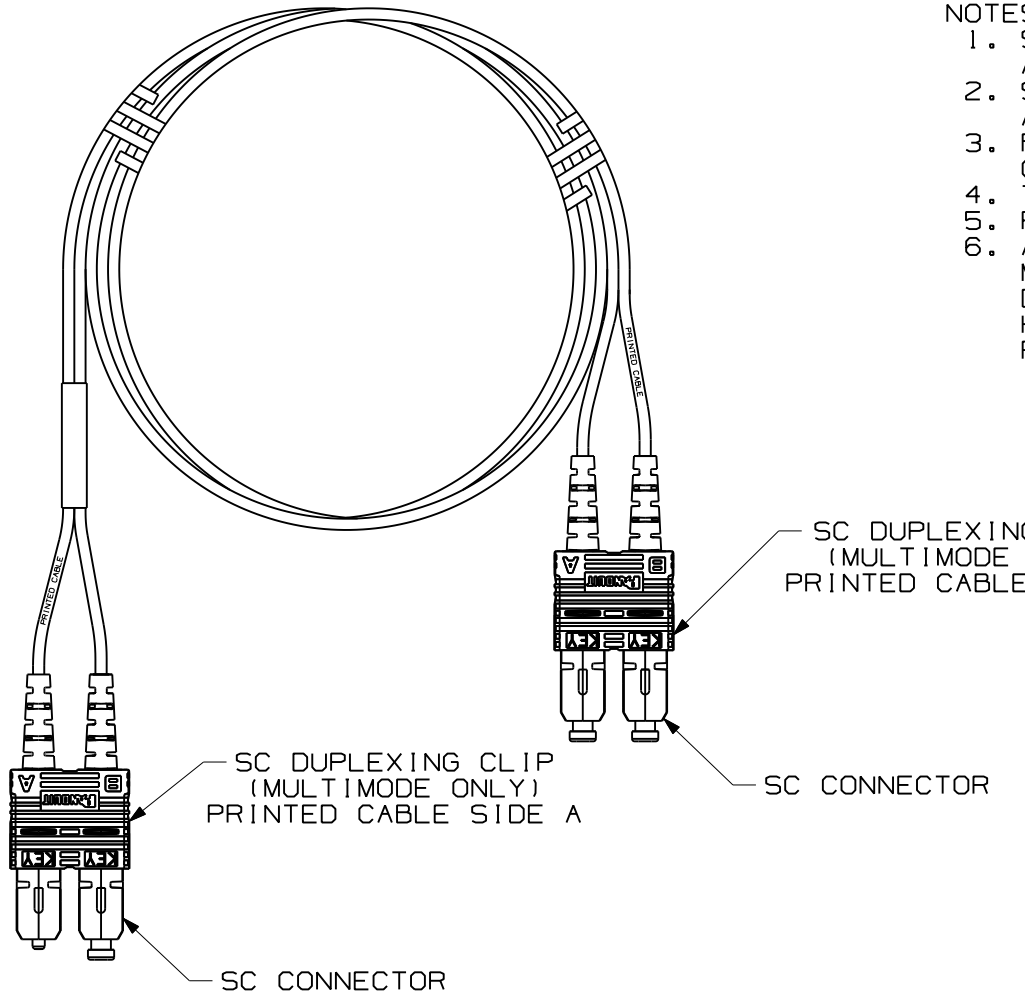

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
R	12-14-09	EFK		RELEASED TO PRODUCTION	01302-53			

NETKEY FIBER OPTIC PATCH CORD
DUPLEX SC TO SC CONFIGURATION
CUSTOMER DRAWING

PANDUIT™ CORP.
TINLEY PARK, ILL 60477

THIRD ANGLE PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)±.010 [0.3]
(.XX)±.03 [0.8] ANGLES

DRAWN BY: EFK
DATE: 12-14-09
CHK'D:
MATERIAL:

DRAWING FILENAME: M01302CS_DC/00A
SCALE: NONE
PART NO.: NKF•GR02S-SM•• NKF•GL02S-SM••
DRAWING NO.: 01302-53
SHEET 1 OF 2
SIZE: A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

DUPLEX SC TO SC FIBER OPTIC PATCH CORD

PANDUIT PART NUMBER	LENGTH (**) M = METERS	CABLE				SC CONNECTOR		
		FIBER TYPE	COUNT	RATING	COLOR	BOOT COLOR	MAX. IL	MIN. RL
NKF6GR02S-SM**	01, 02, 03, 05, 10	62.5/125 OM1	DUPLEX 3.0mm ZIPCORD	RISER (OFNR)	ORANGE	WHITE	0.75dB	26dB
NKF5GR02S-SM**		50/125 OM2				BLACK		
NKFXGR02S-SM**		50/128 OM3			AQUA	AQUA		
NKF9GR02S-SM**		SINGLEMODE OS1			YELLOW	WHITE		40dB
NKF6GL02S-SM**		62.5/125 OM1		LOW SMOKE ZERO HALOGEN (LSZH)	ORANGE	WHITE	0.75dB	26dB
NKF5GL02S-SM**		50/125 OM2				BLACK		
NKFXGL02S-SM**		50/128 OM3			AQUA	AQUA		
NKF9GL02S-SM**		SINGLEMODE OS1			YELLOW	WHITE		40dB

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
R	12-14-09	EFK		RELEASED TO PRODUCTION	01302-53			

NETKEY FIBER OPTIC PATCH CORD
DUPLEX SC TO SC CONFIGURATION
CUSTOMER DRAWING

PANDUIT™ CORP.
TINLEY PARK, ILL 60477

THIRD ANGLE PROJECTION

ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.
DIMENSIONAL TOLERANCES ARE:
(.X) (.XXX)±.010 [0.3]
(.XX)±.03 [0.8] ANGLES

DRAWN BY EFK
DATE 12-14-09
CHK'D
MATERIAL

DRAWING FILENAME M01302CS_DC/00A
SCALE NONE
PART NO. NKF*GR02S-SM** NKF*GL02S-SM**
DRAWING NO. 01302-53
SIZE A
SHEET 2 OF 2