

#### **RONDA-WAS-C**

Asymmetric beam for wall washing with holder C compatible with LEDiL HEKLA

#### **TECHNICAL SPECIFICATIONS:**

**Dimensions** Ø 53.9 mm

Height 24.7 mm

Fastening socket

yes 🕕 ROHS compliant



#### **MATERIAL SPECIFICATIONS:**

Material Colour **Finish** Component **Type RONDA-WAS** Single lens **PMMA** clear **RONDA-HLD-C** PC Holder white


#### **ORDERING INFORMATION:**

**MPQ** Box weight (kg) Component Qty in box MOQ

FN15971\_RONDA-WAS-C 420 120 0.0 Single lens 30


» Box size:



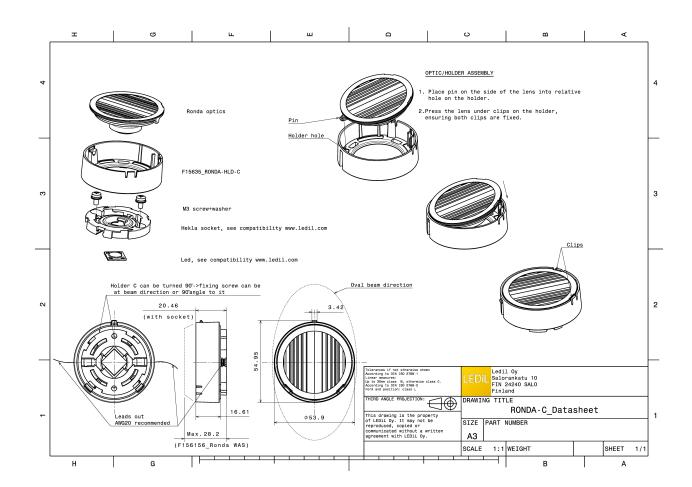

2/18

#### PHOTOMETRIC DATA (MEASURED):

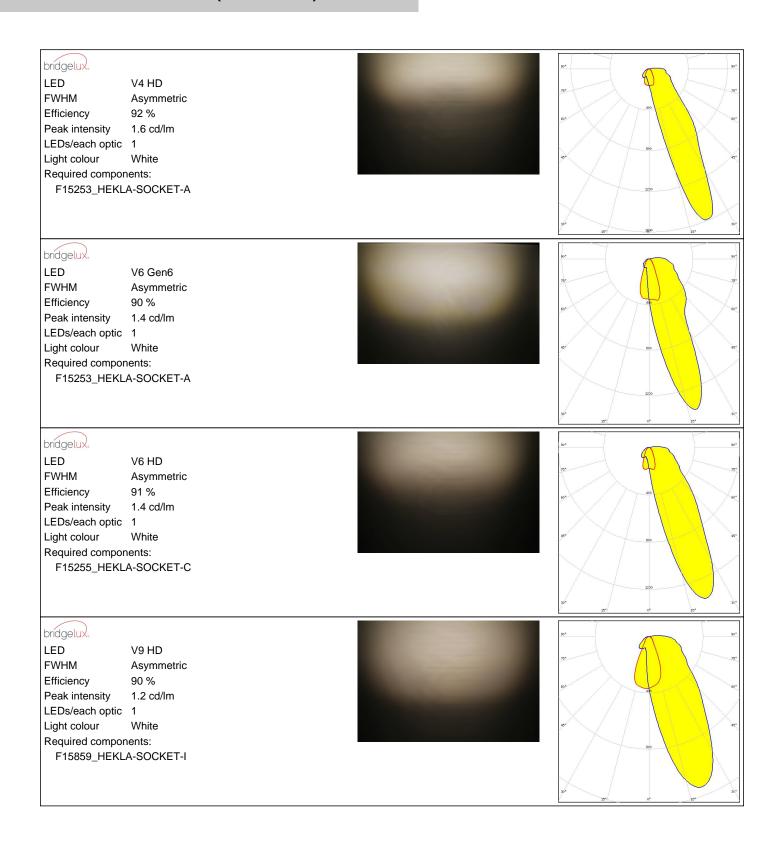

#### PHOTOMETRIC DATA (MEASURED):

bridgelux.


LED VERO10 FWHM Asymmetric

Efficiency 89 %

Peak intensity 1 cd/lm LEDs/each optic 1

Light colour White Required components:

F15616\_HEKLA-SOCKET-F




bridgelux.

LED Vesta TW 13mm (25W) CSP

FWHM Asymmetric
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Light colour White
Required components:
C16142\_HEKLA-SOCKET-K
Bender Wirth: 492 Typ L8




bridgelux

LED Vesta TW 9mm (12W) CSP

FWHM Asymmetric
Efficiency 85 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142\_HEKLA-SOCKET-K




**CITIZEN** 

LED CLC020 Series (Dim-To-Warm)

FWHM Asymmetric
Efficiency 86 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142\_HEKLA-SOCKET-K






#### PHOTOMETRIC DATA (MEASURED):

# **CITIZEN**

LED CLL02x/CLU02x (LES10)

FWHM Asymmetric
Efficiency 89 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:


F15255\_HEKLA-SOCKET-C



# **CITIZEN**

LED CLL03x/CLU03x
FWHM Asymmetric
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components: F15859\_HEKLA-SOCKET-I




#### **CITIZEN**

LED CLU700/701/702
FWHM Asymmetric
Efficiency 90 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15255\_HEKLA-SOCKET-C



# **CITIZEN**

LED CLU710/711
FWHM Asymmetric
Efficiency 87 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15956\_HEKLA-SOCKET-J


#### PHOTOMETRIC DATA (MEASURED):

# **CITIZEN**

LED CLU7A2 (LES 4.2mm)

FWHM Asymmetric
Efficiency 91 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255\_HEKLA-SOCKET-C




# **CITIZEN**

LED LCN-C01B (Tunable White)

FWHM Asymmetric Efficiency 87 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 481 Typ L8




# CREE \$

LED CMA1516
FWHM Asymmetric
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15256\_HEKLA-SOCKET-D






# CREE 🕏

LED CMA1825
FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White


F15254\_HEKLA-SOCKET-B

Required components:





#### PHOTOMETRIC DATA (MEASURED):

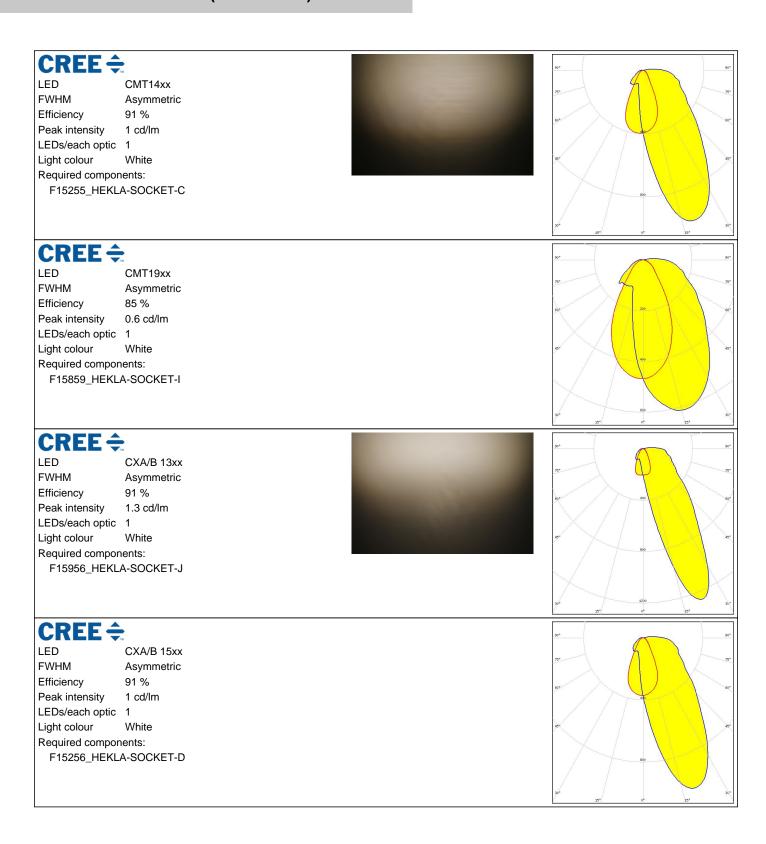




#### PHOTOMETRIC DATA (MEASURED):

# CREE 💠

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

**FWHM** Asymmetric 87 % Efficiency Peak intensity 0.7 cd/lm LEDs/each optic 1 Light colour White Required components:

F15254\_HEKLA-SOCKET-B




#### LUMILEDS

LED LUXEON CoB 1202HD

**FWHM** Asymmetric 92 % Efficiency Peak intensity 1.4 cd/lm LEDs/each optic 1 White Light colour Required components:

F15848\_HEKLA-SOCKET-G






### LUMILEDS

LED LUXEON CoB 1202s

**FWHM** Asymmetric Efficiency 91 % Peak intensity 1.3 cd/lm LEDs/each optic 1 Light colour White Required components:

F15848\_HEKLA-SOCKET-G




### **MUMILEDS**

LED LUXEON CoB 1204HD

**FWHM** Asymmetric Efficiency 91 % 1.1 cd/lm Peak intensity LEDs/each optic 1 White Light colour Required components: F15858\_HEKLA-SOCKET-H








#### PHOTOMETRIC DATA (MEASURED):

#### **LUMILEDS**

LED LUXEON CoB 1205HD

**FWHM** Asymmetric 90 % Efficiency Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour White Required components: F15858\_HEKLA-SOCKET-H






#### LUMILEDS

LED LUXEON CX Plus CoB - HD S01H4

**FWHM** Asymmetric 91 % Efficiency Peak intensity 1.4 cd/lm LEDs/each optic 1 White Light colour Required components:

Bender Wirth: 634c Hekla




### LUMILEDS

LUXEON CX Plus CoB - HD S01H6 / HD S02H6 LED

**FWHM** Asymmetric Efficiency 91 % Peak intensity 1.4 cd/lm LEDs/each optic 1 Light colour White


Required components: Bender Wirth: 634c Hekla



### **MUMILEDS**

LED LUXEON CX Plus CoB - HD S04H9

**FWHM** Asymmetric Efficiency 91 % Peak intensity 1.1 cd/lm LEDs/each optic 1 White Light colour Required components: Bender Wirth: 634c Hekla






#### PHOTOMETRIC DATA (MEASURED):



LED CDM-14 (Dim-To-Warm)

FWHM Asymmetric
Efficiency 80 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 491 Typ L8




#### **ELUMINUS**

LED CDM-6 (Dim-To-Warm)

FWHM Asymmetric
Efficiency 82 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8




#### **ELUMINUS**

LED CDM-9 (Dim-To-Warm)

FWHM Asymmetric
Efficiency 85 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142\_HEKLA-SOCKET-K


C16142\_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8



### LUMINUS

LED CxM-14 (19x19)
FWHM Asymmetric
Efficiency 82 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859\_HEKLA-SOCKET-I






#### PHOTOMETRIC DATA (MEASURED):

#### **ELUMINUS**

LED CXM-4
FWHM Asymmetric
Efficiency 90 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255\_HEKLA-SOCKET-C




#### **ELUMINUS**

LED CxM-9 (13.5x13.5) FWHM Asymmetric Efficiency 89 %

Efficiency 89 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255\_HEKLA-SOCKET-C




#### **WNICHIA**

LED NJCWL024Z-V1MT: COB L-Type Tunable White

FWHM Asymmetric
Efficiency 83 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 497 Typ L8




#### **WNICHIA**

LED NVCWJ024Z-V1MT: COB J-Type Tunable White

FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 498 Typ L8






#### PHOTOMETRIC DATA (MEASURED):

LED Fortimo SLM L09 CoB

**FWHM** Asymmetric 91 % Efficiency Peak intensity 1 cd/lm LEDs/each optic 1 Light colour White Required components:


F15858\_HEKLA-SOCKET-H



LED Fortimo SLM L13 CoB

**FWHM** Asymmetric 84 % Efficiency Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8




# SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

**FWHM** Asymmetric Efficiency 90 % Peak intensity 1 cd/lm LEDs/each optic 1 Light colour White Required components:






# **SAMSUNG**

LED LC010C **FWHM** Asymmetric Efficiency 90 % Peak intensity 1.1 cd/lm LEDs/each optic 1 White Light colour

Required components: F15848\_HEKLA-SOCKET-G



#### PHOTOMETRIC DATA (MEASURED):


# **SAMSUNG**

LED LC010C G2 FWHM Asymmetric Efficiency 88 %

Peak intensity 1.5 cd/lm LEDs/each optic 1

Light colour White Required components:

F15255\_HEKLA-SOCKET-C




# **SAMSUNG**

LED LC016D / LC019D / LC026D / LC033D

FWHM Asymmetric
Efficiency 83 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859\_HEKLA-SOCKET-I






# SAMSUNG

LED LC020C FWHM Asymmetric

Efficiency 90 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15848\_HEKLA-SOCKET-G




# **SAMSUNG**

LED LC020C G2
FWHM Asymmetric
Efficiency 89 %
Peak intensity 1 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15859\_HEKLA-SOCKET-I



#### PHOTOMETRIC DATA (MEASURED):



LED MJT COB LES 6

FWHM Asymmetric


Efficiency 88 %

Peak intensity 1.2 cd/lm

LEDs/each optic 1 Light colour White

Required components:

F15255\_HEKLA-SOCKET-C



# SEOUL SEMICONDUCTOR


LED MJT COB LES 9.8

FWHM Asymmetric Efficiency 88 %

Peak intensity 0.9 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255\_HEKLA-SOCKET-C



#### **TRIDONIC**

LED SLE G7 LES09

FWHM Asymmetric

Efficiency 89 %


Peak intensity 1 cd/lm

LEDs/each optic 1

Light colour White Required components:

F15255\_HEKLA-SOCKET-C





# **TRIDONIC**

LED SLE G7 LES13

85 %

FWHM Asymmetric


Peak intensity 0.7 cd/lm

LEDs/each optic 1 Light colour White


Efficiency

Required components: F15859\_HEKLA-SOCKET-I





#### PHOTOMETRIC DATA (MEASURED):

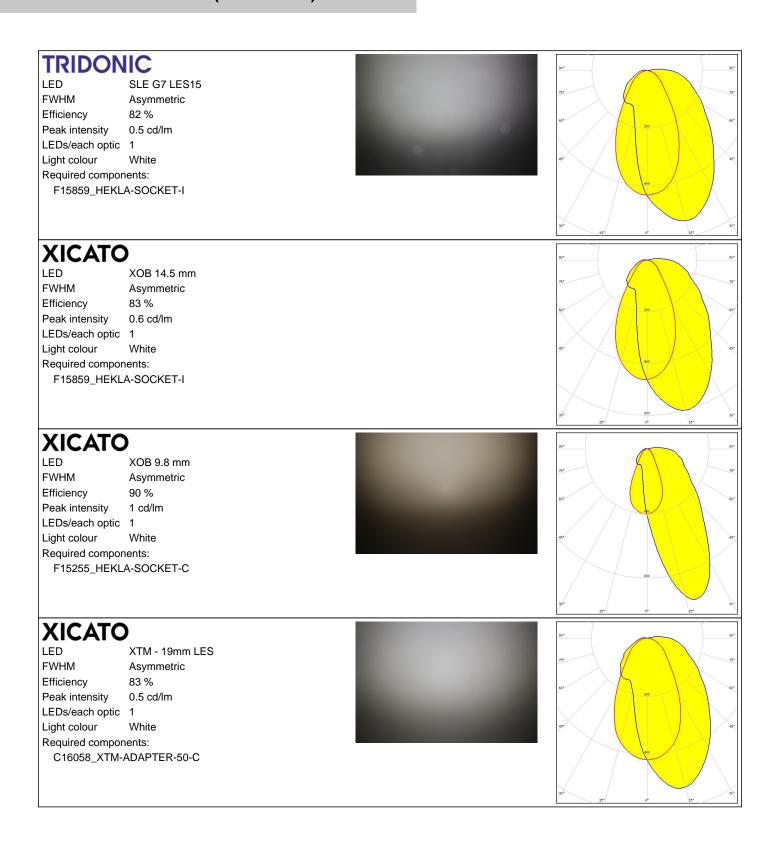




#### PHOTOMETRIC DATA (SIMULATED):

#### **MUMILEDS**

LED LUXEON CoB L04/L05

FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15254\_HEKLA-SOCKET-B




#### **MUMILEDS**

LED LUXEON CoB L08
FWHM Asymmetric
Efficiency 78 %
Peak intensity 0.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:

C16142\_HEKLA-SOCKET-K Bender Wirth: 457 Typ L8




### **MILEDS**

LED LUXEON CoB M02/M03

FWHM Asymmetric
Efficiency 89 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15256\_HEKLA-SOCKET-D



# **DESCRIPTION** LUMILEDS

LED LUXEON CoB S01
FWHM Asymmetric
Efficiency 90 %

Peak intensity 1.6 cd/lm LEDs/each optic 1 Light colour White Required components:


F15956\_HEKLA-SOCKET-J



#### PHOTOMETRIC DATA (SIMULATED):

#### **WNICHIA**

LED COB T-Type
FWHM Asymmetric
Efficiency 83 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848\_HEKLA-SOCKET-G





#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy