Series 70-9296



The Industrial and Solid State Lighting markets continue to look for new products which will reduce size and cost without jeopardizing performance. The new dual-beam boxed contact system from AVX surface mounts to a PCB and provides a simple and reliable wire termination without soldering of the wire. The unique contact design integrates several key features within the stamping to facilitate SMT pickup, wire guidance, high force retention and easy wire removal. Combined, these features provide all of the benefits of a full function connector, without the added cost of the insulator and labor.

This family of 4mm, 3mm and 2mm closed box contacts accept either solid or stranded wires ranging from 12AWG to 28AWG with current ratings up to 20Amps. Once the contacts are soldered onto the PCB, wires need to be stripped to length (twisted if stranded) and inserted into the open end of the box contact. As the wires are pushed in, upper and lower tines guide the wire down the center of the contact deflecting the right and left contact tines until the wire reaches the wire stop. Wires can be removed by twisting the wire out and or using a small blade removal tool to help release some of the contact force.

APPLICATIONS

- Industrial/Ruggedized Wire-to-Board applications
- Replace hard soldering of wire to a PCB
- Reference Product Specification 201-01-143
- Reference Application Notes 201-01-150

FEATURES AND BENEFITS

- Dual Beam box contact provides maximum mechanical stability and wire retention
- Tape and reel packaged for automated SMT placement
- Staged current rating based on AWG, maximum is 20A (12AWG)
- Increased functionality with the single contact placement ability; multiple contacts and/or specific individual locations

ELECTRICAL

· Voltage Rating: Based on placement distance

Current Rating: See Matrix Below

ENVIRONMENTAL

• Operating Temperature: -40°C to +125°C

MECHANICAL

- Contact Material: Phosphor Bronze
- Contact Plating: Tin over Nickel
- · Durability 5 Cycles

HOW TO ORDER



| Contact Size | | | | | | |
|--------------|-----------------|---------------|-------------------|--|--|--|
| Code | Contact Size | Wire Gauge | Max Insulation | | | |
| 002 | 2mm Contact | 24-28 AWG | 1.5mm Ø | | | |
| 003 | 3mm Contact | 18-26 AWG | 2.5mm Ø | | | |
| 004 | 4mm Contact | 12-20 AWG | 3.4mm Ø | | | |

00X



Tin all over


CURRENT RATING

| Size | Part Number | 12AWG | 14AWG | 16AWG | 18AWG | 20AWG | 22AWG | 24AWG | 26AWG | 28AWG |
|------|-----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 4mm | 709296001004006 | 20A | 16A | 14A | 12A | 10A | | | | |
| 3mm | 709296001003006 | | | | 12A | 10A | 8A | 7A | 5A | |
| 2mm | 709296001002006 | | | | | | 8A | 7A | 5A | 4A |




Series 70-9296

70-9296-001-002-006 2MM POKE HOME CONTACT












NOTES:

- 1. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-143 AND APPLICATION NOTES 201-01-150.
- 2. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 3. PACKING IN TAPE AND REEL, 3500 PIECES PER REEL.
- 4. FOR WIRE TRIM DETAILS REFER TO PAGE 5.

SUGGESTED PCB LAYOUT




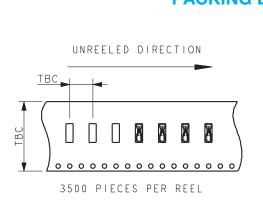

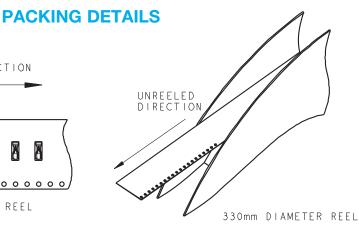

Series 70-9296


70-9296-001-003-006 3MM POKE HOME CONTACT

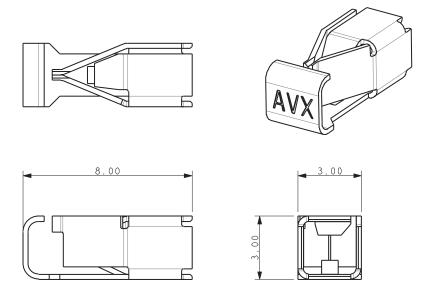



NOTES:

- 1. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-143 AND APPLICATION NOTES 201-01-150.
- 2. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 3. PACKING IN TAPE AND REEL, 2500 PIECES PER REEL.
- 4. FOR WIRE TRIM DETAILS REFER TO PAGE 5.

SUGGESTED PCB LAYOUT

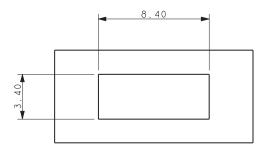

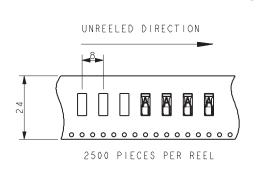


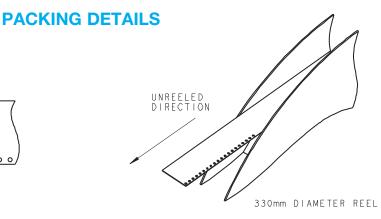






Series 70-9296

70-9296-001-004-006 4MM POKE HOME CONTACT

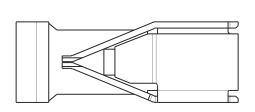









NOTES:


- 1. FOR FURTHER INFORMATION REFER TO ELCO SPECIFICATION 201-01-143 AND APPLICATION NOTES 201-01-150.
- 2. MATERIAL: TIN PLATED PHOSPHOR BRONZE.
- 3. PACKING IN TAPE AND REEL, 2500 PIECES PER REEL.
- 4. FOR WIRE TRIM DETAILS REFER TO PAGE 5.

SUGGESTED PCB LAYOUT

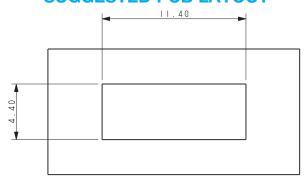





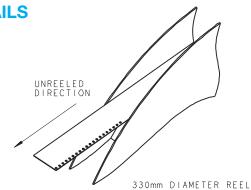




Series 70-9296


CONNECTOR ASSEMBLY

FOR FULL DETAILS REFER TO APPLICATION NOTES 201-01-150

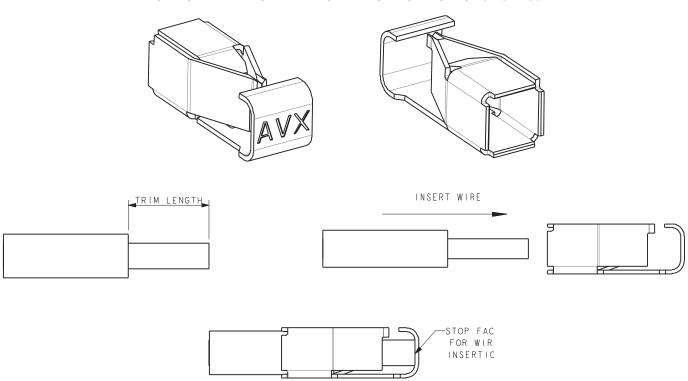

| CONTACT | WIRE SIZE | INSULATOR DIAMETER | TRIM LENGTH |
|---------------------|------------------------|--------------------|------------------|
| 70-9206-001-004-006 | 12AWG and 14AWG | Max 3.4mm | 6.5 ± 0.5 mm |
| 70-9296-001-004-006 | 16AWG, 18AWG and 20AWG | Max 2.5mm | 5.5 ± 0.5mm |
| 70-9296-001-003-006 | 18AWG to 25AWG | Max 2.5mm | 3.5 ± 0.5mm |
| 70-9296-001-002-006 | 22AWG to 28AWG | Max 1.5mm | 3.5 ± 0.5mm |
| 70-9296-001-002-006 | 22AWG to 28AWG | 1.5mm to 2.0mm | 5.5 ± 0.5mm |

CONTACT OPENING TOOL 06-9296-7001-01-000



TOOL TO OPEN THE CONTACT TO INSERT/WITHDRAW WIRE. REFER TO APPLICATION NOTES 201-01-150.