


B-140V


REV

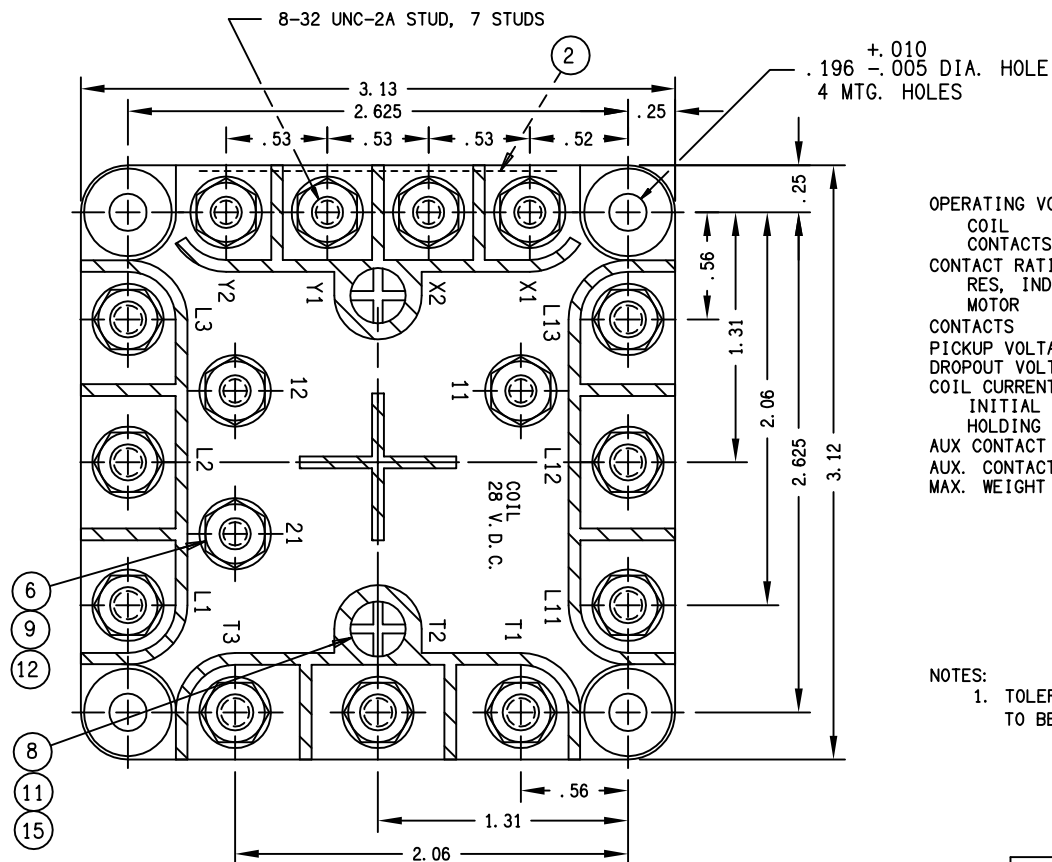

OPERATING VOLTAGE
COIL
CONTACTS
CONTACT RATING
RES. IND
MOTOR
CONTACTS
PICKUP VOLTAGE
DROPOUT VOLTAGE
COIL CURRENT AT 29 V
INITIAL
HOLDING
AUX CONTACT
AUX. CONTACT RATING
MAX. WEIGHT


28 VDC
200 VAC, 400 HZ

60 AMP/PHASE
40 AMP/PHASE
T. P. D. T. N. O.
18 V. MAX. (HOT)
7, +0, -5.5 VDC
5.0 AMP
.5 AMP
SPST N. O. EACH SIDE
5 AMP, 28 VDC
1 LB. 8 OZ.

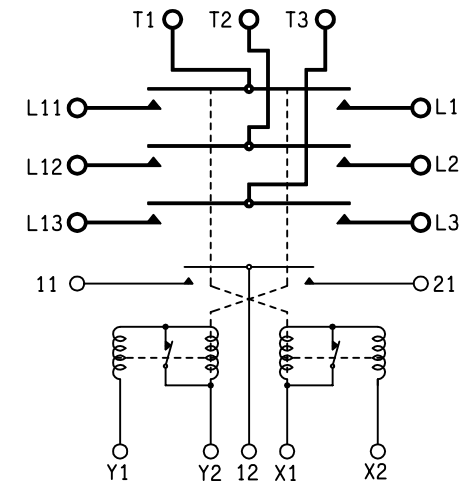

NOTES:

1. TOLERANCE ON ALL TERMINAL LENGTHS
TO BE $\pm$.06

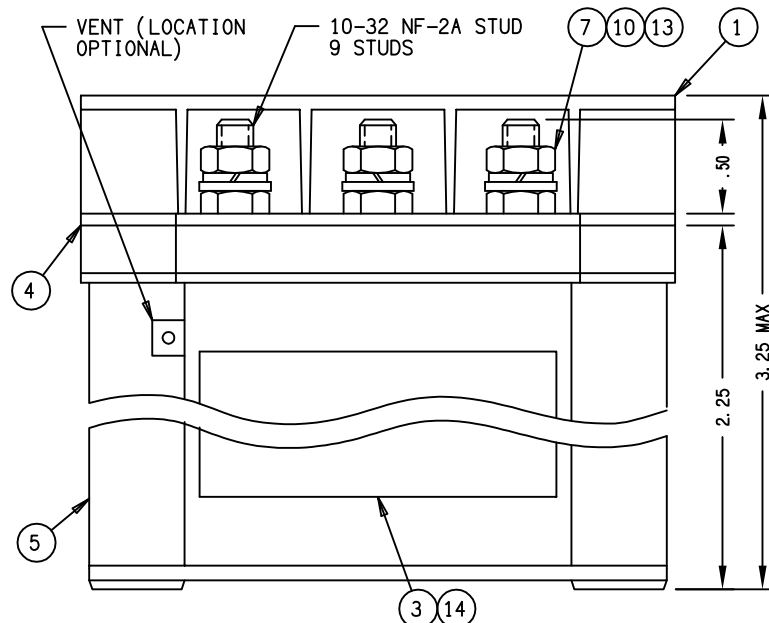

15	2	51701-310	WASHER .203 X .115 X .015			MYLAR
14	1	39529-001	OVERLAY-NAME PLATE			
13	9	51810-054	WASHER - LOCK NO. 10 SPLIT		AN935B10	BRONZE
12	7	51808-064	WASHER - LOCK NO. 8 SPLIT		AN935B8	BRONZE
11	2	51806-031	WASHER - LOCK NO. 6 INT. TOOTH		AN936A6B	BRONZE
10	9	51712-194	WASHER- 7/16 X .203 X .031		AN961-10	BRASS
9	7	51712-104	WASHER- 3/8 X 11/64 X .032		AN961-8	BRASS
8	2	51206-641	SCREW-6-32 X 3/4 RD. HD.		AN515PB6-12	BRASS
7	9	50410-174	NUT-10-32 X 5/16 X 9/64 HEX		MS35650-305	BRASS
6	7	50408-034	NUT-8-32 X 5/16 X 1/8 HEX		MS35649-286	BRASS
5	1	19390-010	RELAY ASSEMBLY - PRIMARY			
4	1	17985-001	PLATE - BASE COVER			
3	1	16043-001	PLATE - NAME			
2	1	12771-001	PLATE - WARNING			
1	1	12531-001	SHIELD - TERMINAL			

FIND NO	QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	FSCM NO	DRAWING OR SPECIFICATION	MATERIAL OR NOTE
---------	----------	------------------------	-----------------------------	---------	--------------------------	------------------

TOLERANCES:

UNLESS OTHERWISE SPECIFIED

2 PL DEC.	3 PL DEC.	ANGLES
$\pm$.06	$\pm$.010	$\pm$ 1°

REF.

VERTOL
BENDIX

A02ES100-5
3B4-1 & 1A

DR BY	RLS	99/02/18
CHK BY	RS	99/02/24
ENGR	WER	99/02/24
MFG	MB	99/02/24

SIZE
C

CODE IDENT
74063

SCALE NONE SHEET

TE

Hartman Division 175 N. DIAMOND STREET MANSFIELD, OHIO 44902

CONTACTOR - T. P. D. T. N. O.
093

DWG NO.
B-140V

REF TE P/N 1-1616043-0