


# Technical Data Sheet Top Infrared LED

## IR67-21C/TR8

#### **Features**

- Compatible with infrared and vapor phase reflow solder process.
- Low forward voltage.
- View angle 120°
- Pb free
- The product itself will remain within RoHS compliant version.



## **Descriptions**

• IR67-21C/TR8 is an infrared emitting diode in miniature SMD package which is molded in a water clear plastic with flat top view lens.

The device is spectrally matched with silicon photodiode and phototransistor.

## **Applications**

- Sensor
- Optoelectronic switch
- Camera
- VCR
- Video
- Smoke detector

#### **Device Selection Guide**


LED Part No.	Chip Material	Lens Color	
IR67-21C/TR8	GaAlAs	Water clear	


Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 2 Page: 1 of 10

Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai




## **Package Dimensions**

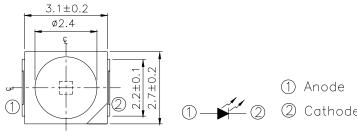



For reflow soldering (Proposal)

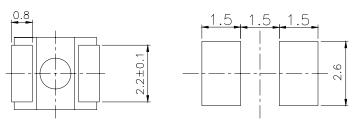

**Notes:** 1.All dimensions are in millimeters

2.Tolerances unless dimensions ±0.1mm

## **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Units
Continuous Forward Current	$I_{\mathrm{F}}$	65	mA
Peak Forward Current *1	$I_{\mathrm{FP}}$	1.0	A
Reverse Voltage	$V_R$	5	V
Operating Temperature	$T_{opr}$	-40~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	$T_{stg}$	-40 ~ +100	$^{\circ}\!\mathbb{C}$
Soldering Temperature *2	$T_{sol}$	260	$^{\circ}\!\mathbb{C}$
Power Dissipation at(or below)	$P_d$	130	mW
25°C Free Air Temperature			
Temperature resistance junction ambient	Rthj-a	400	K/W

**Notes:** \*1: $I_{FP}$  Conditions--Pulse Width  $\leq 100 \mu$  s and Duty  $\leq 1\%$ .

\*2:Soldering time ≤ 5 seconds.

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 2 Page: 2 of 10

Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai



**Electro-Optical Characteristics (Ta=25°C)** 

Parameter	Symbol	Condition	Min.	Typ.	Max.	Units	
	$ m I_E$	I <sub>F</sub> =20mA	1.0	1.5			
Radiant Intensity		$I_F \!\!=\! 100mA$ Pulse Width $\leq 100~\mu$ s ,Duty $\leq 1\%$	4	8	20	mW /sr	
Total Radiated Power	Po	I <sub>F</sub> =100mA		20		mW	
Peak Wavelength	λp	I <sub>F</sub> =20mA	1	940		nm	
Spectral Bandwidth	Δλ	$I_F=20mA$		45		nm	
		I <sub>F</sub> =20mA		1.2	1.5		
Forward Voltage	$V_{\mathrm{F}}$	$I_F \!\!=\! 100mA$ Pulse Width $\leq 100~\mu$ s ,Duty $\leq 1\%$		1.4	1.8	V	
Reverse Current	$I_R$	V <sub>R</sub> =5V			10	μΑ	
View Angle	2 \theta 1/2	I <sub>F</sub> =20mA		120		deg	
Rise Time	tr	I <sub>F</sub> =100mA		800		ns	
Fall Time	tr	I <sub>F</sub> =100mA		400		ns	
Active chip area	A		0.09		mm <sup>2</sup>		
Dimensions of the active chip area	LxW		0.3×0.3		mm×mm		

## Rank

 $Condition : I_F \!\!=\!\! 20mA$ 

Unit: mW/sr

Bin Number	G	Н
Min	1.0	2.0
Max	2.5	3.5

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 2 Page: 3 of 10

Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai



## **Typical Electro-Optical Characteristics Curves**

Fig.1 Forward Current vs.

Ambient Temperature

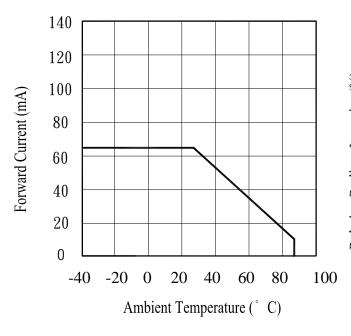


Fig.2 Spectral Distribution




Fig.3 Peak Emission Wavelength
Ambient Temperature





Fig.4 Forward Current vs. Forward Voltage




Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 2 Page: 4 of 10 Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai




## **Typical Electro-Optical Characteristics Curves**

Fig.5 Relative Radiant Intensity vs.

**Angular Displacement** 

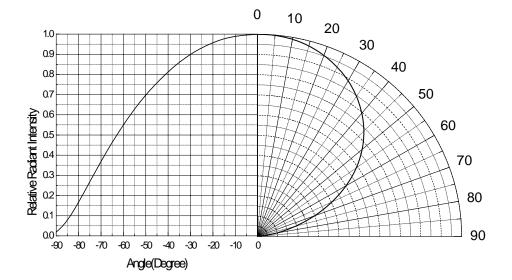

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 2 Page: 5 of 10 Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai





#### **Precautions For Use**


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
  - 2.3 The LEDs should be used within a year.
  - 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
  - 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
  - 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.

- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

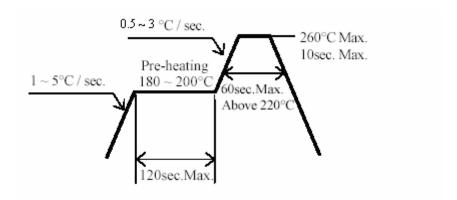

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 2 Page: 6 of 10 Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

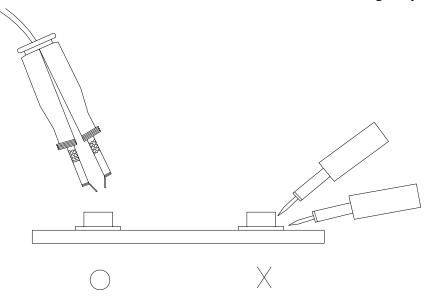

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 2 Page: 7 of 10

Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai



## **Reliability Test Item And Condition**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%


NO.	Item	Test Conditions	Test Hours/	Sample	Failure	Ac/Re
			Cycles	Sizes	Judgement	
					Criteria	
1	REFLOW Soldering	TEMP. : 260°C±5°C	6Mins	22pcs		0/1
		10secs			$I_R \ge U \times 2$	
2	Temperature Cycle	$H: +100^{\circ}C$ 15mins	50Cycles	22pcs	Ie≦Lx0.8	0/1
		5mins			$V_F \ge U \times 1.2$	
		L:-40°C <b>1</b> 5mins				
3	Thermal Shock	H :+100°C <b>▲</b> 5mins	50Cycles	22pcs	U: Upper	0/1
		↓ 10secs	-		Specification	
		L :-10°C 5mins			Limit	
4	High Temperature	TEMP. : +100°C	1000hrs	22pcs	L: Lower	0/1
	Storage				Specification	
5	Low Temperature	TEMP. : -40°C	1000hrs	22pcs	Limit	0/1
	Storage					
6	DC Operating Life	I <sub>F</sub> =20mA	1000hrs	22pcs		0/1
7	High Temperature/	85°C /85% R.H	1000hrs	22pcs		0/1
	High Humidity					

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 2 Page: 8 of 10 Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai




## **Package Dimensions**

1. Reel Dimensions

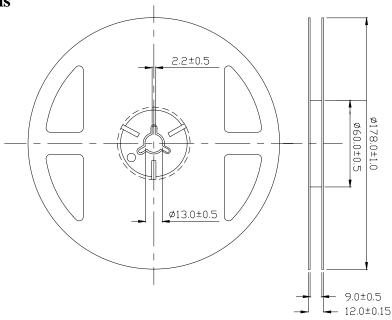

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### 2. Carrier Tape Dimensions:(Quantity: 2000pcs/reel)

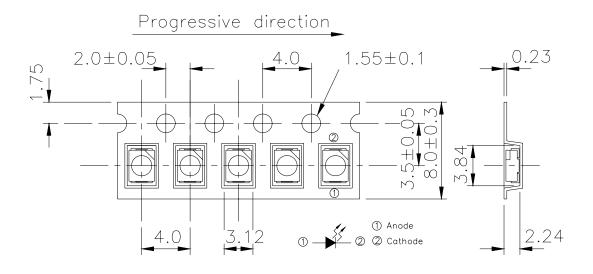


TOLERANCES UNLESS DIMENSION±0.1 ANGLE±0.5 UNIT:mm

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 2 Page: 9 of 10

Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai



## **Packing Procedure**

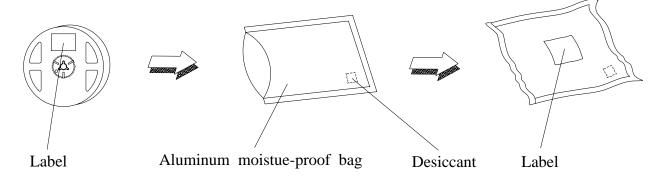

## **Label Form Specification**



CPN: Customer's Production Number

P/N : Production Number QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

**REF**: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

#### **Notes**

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http:\\www.everlight.com

Everlight Electronics Co., Ltd. http:\\www.everlight.com Rev 2 Page: 10 of 10 Device No: DTR-067-037 Prepared date: 07-20-2007 Prepared by: Jaine Tsai