


110 WATT AC-DC CONVERTER

WRDJ-00X Series 3 CHANNEL

Specifications<AC/DC>	Model			
WRDJ**X-U 110WATTS/3 OUTPUTS	WRDJ01X-U	WRDJ03X-U	WRDJ04X-U	WRDJ06X-U
Input Characteristic				
Input Voltage	AC115/230V			
Input Current	2.4A at AC115V/1.4A at AC230V			
Input Range *1	AC85-132/170-264V(DC220-350V)			
Input Frequency	50/60Hz			
Input Frequency Range	47-440Hz			
Phase	Single			
Inrush Current *2	23A(maximum) at AC115/46A(maximum) at AC230V			
Efficiency [%] (typical) *3	72	72	72	72

BLOCK DIAGRAM

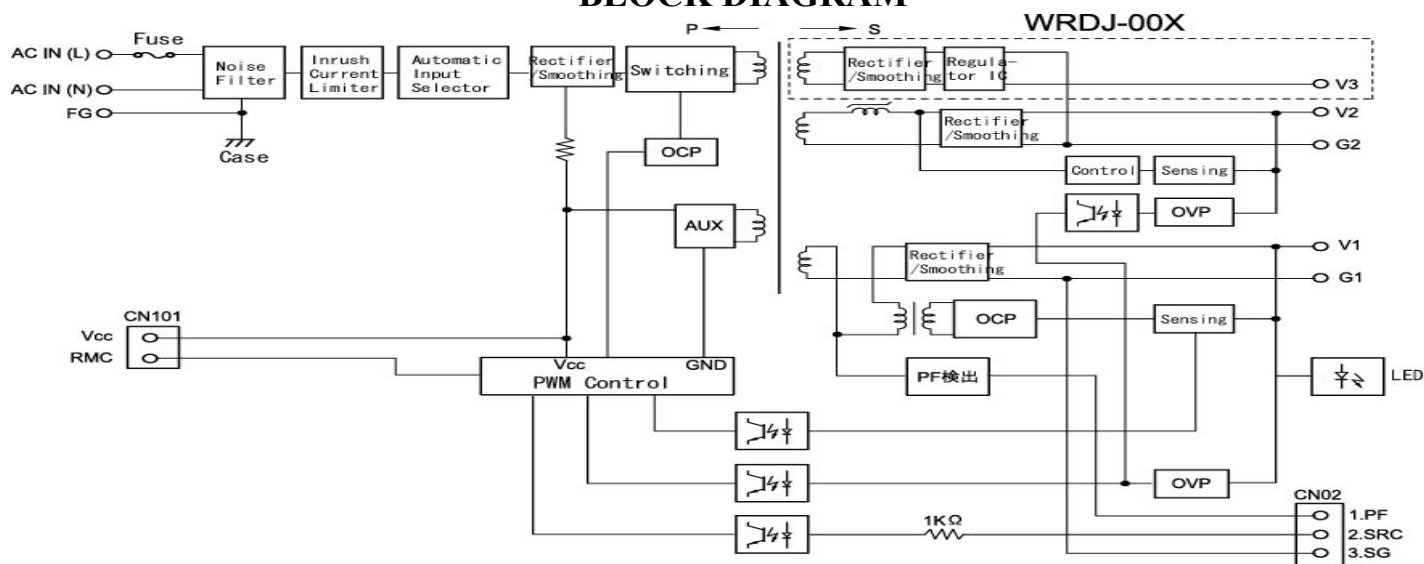


ETA-USA


HIGH QUALITY SWITCHING POWER SUPPLIES

ETA-USA Tel: 408-778-2793 Fax: 408-779-2753 e-mail: sales@eta-usa.com

DIMENSION DIAGRAM

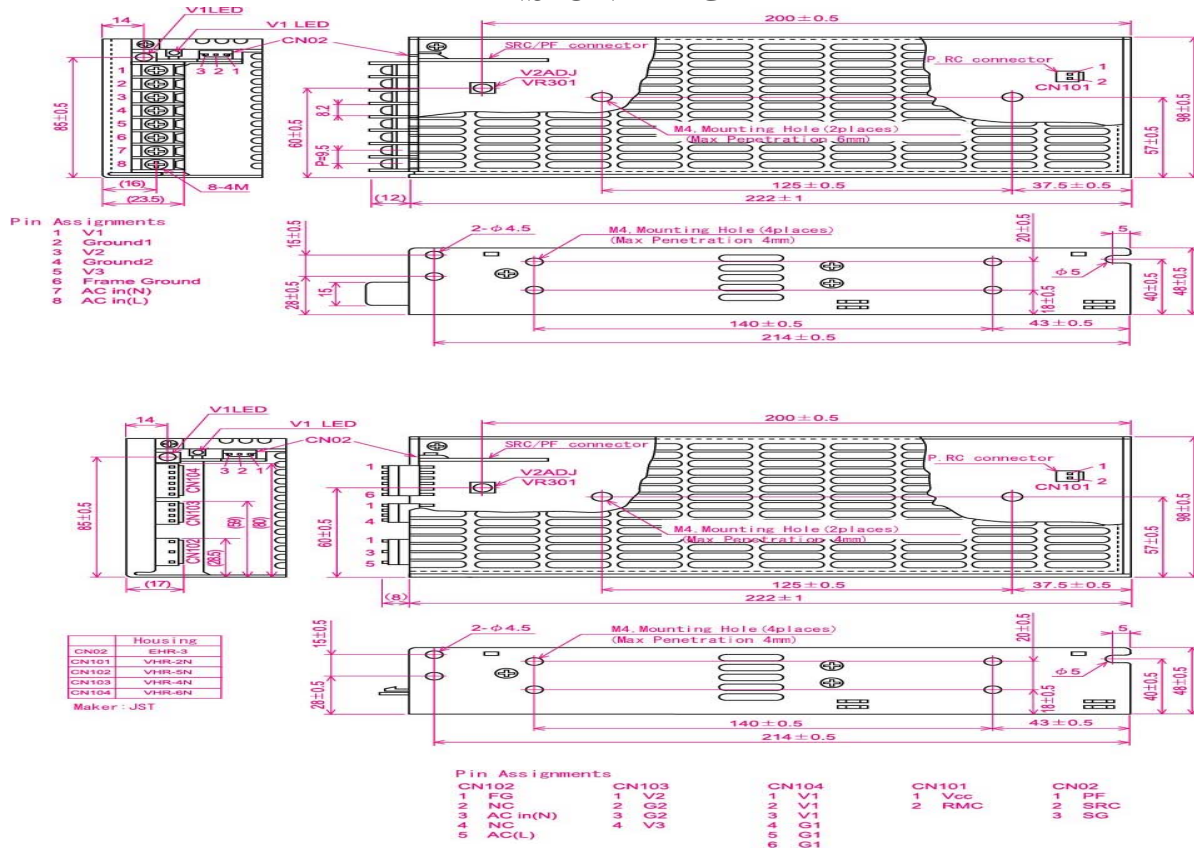

EFFICIENCY CURVE

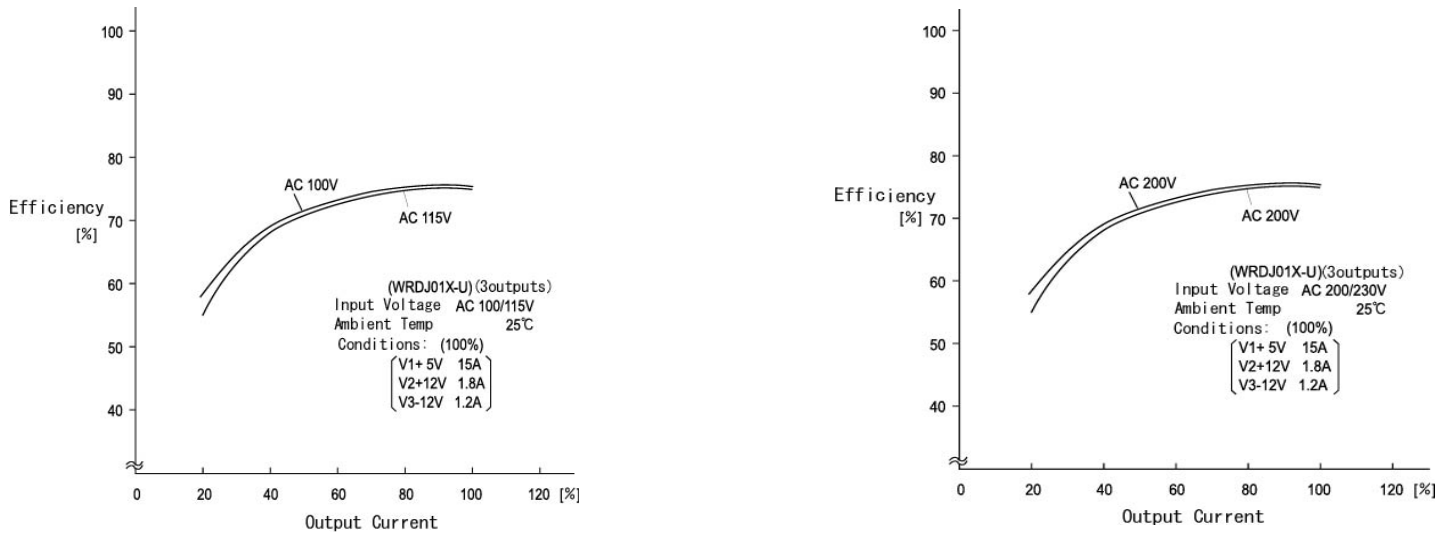

OCP CURVE

