

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

**Part Number:** [03-09-2032](#)  
**Status:** **Active**  
**Overview:** [Standard .093"](#)  
**Description:** 2.36mm Diameter Standard .093" Pin and Socket Plug Housing, 3 Circuits, Single Row

**Documents:**  
[3D Model](#)  
[Drawing \(PDF\)](#)  
[Product Specification PS-02-09 \(PDF\)](#)  
[Product Specification PS-1396-002 \(PDF\)](#)  
[Product Specification PS-43660-9999 \(PDF\)](#)  
[RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**

CSA LR19980  
UL E29179

**General**

Product Family Crimp Housings  
Series [1396](#)  
Application Power, Wire-to-Wire  
Comments 17.0A max. can be achieved when housing is used with 42477 or 42478 terminals  
Overview [Standard .093"](#)  
Product Name Standard .093"

**Physical**

Circuits (maximum) 3  
Color - Resin Natural  
Flammability 94V-2  
Gender Dual  
Glow-Wire Compliant No  
Lock to Mating Part Yes  
Material - Resin Nylon  
Number of Rows 1  
Packaging Type Bag  
Panel Mount No  
Pitch - Mating Interface 5.03mm  
Stackable No  
Temperature Range - Operating -40°C to +105°C

**Electrical**


Current - Maximum per Contact 14A

**Material Info**

Old Part Number 1396-P1  
UPC 800753614826

**Reference - Drawing Numbers**

Product Specification PS-02-09, PS-1396-002, PS-43660-9999  
Sales Drawing SD-1396-\*, SD-1396-002

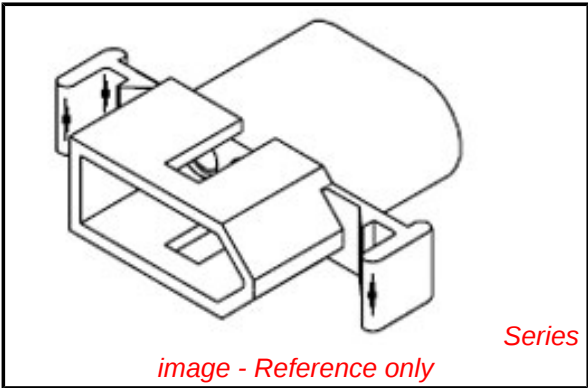

**EU RoHS**  
**ELV and RoHS**  
**Compliant**  
**REACH SVHC**  
**Contains SVHC: No**  
**Low-Halogen Status**  
**Not Reviewed**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[1396Series](#)

**Mates With**  
[1396r](#)

**Use With**  
[1189](#) Crimp Terminals, [1190](#) Crimp Terminals, [1380](#) Male Crimp Terminals, [1381](#) Female Crimp Terminals, [1433](#) Crimp Terminals, [1434](#) Male Crimp Terminals, [1973](#) , [2151](#) , [2273](#) , [2870](#) , [2871](#) , [4272](#) , [4550](#) , [6271](#)