




# Series 112, 113, & 114 Deci-Center™ Jumpers (cont.)

All tolerances  $\pm .005$  [.13]  
unless otherwise specified

Note: 10, 12, 18, 20, & 28  
conductor jumpers do not  
have numbers on covers

See Data Sheet No.  
11008 for other  
configurations and  
additional information.

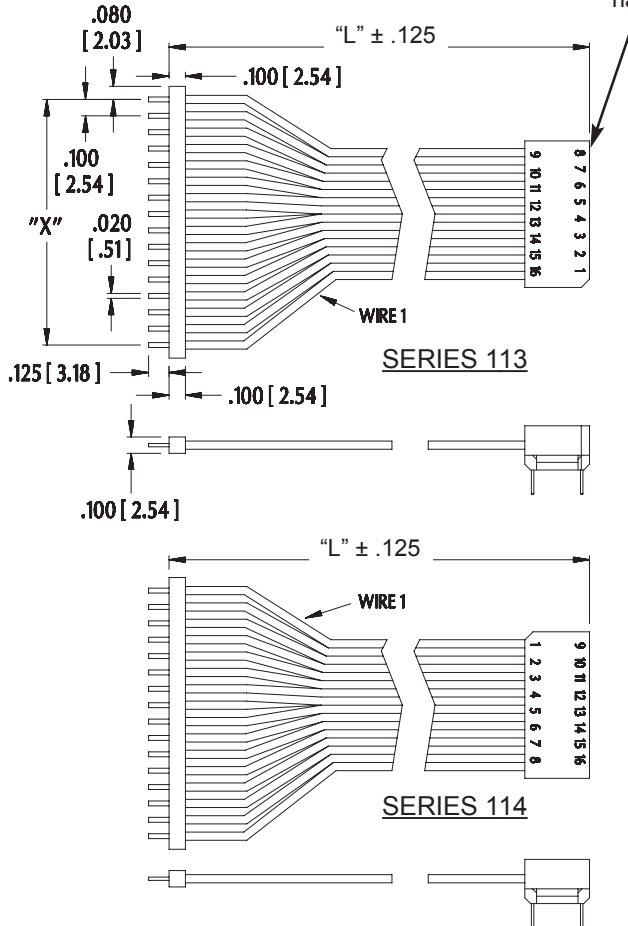


## WIRING LIST

Wire Number	Series 112, 113, 114 Pin Number	Series 112X, 113X, 114X Pin Number
1	1	1
2	2	16
3	3	2
4	4	15
5	5	3
6	6	14
7	7	4
8	8	13
9	9	5
10	10	12
11	11	6
12	12	11
13	13	7
14	14	10
15	15	8
16	16	9

## CABLE DETAIL

(Series 112X, 113X, 114X)

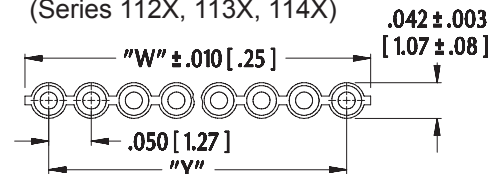

"W" = NO. OF CONDUCTORS X .050 [1.27] + .005 [.08]  
 "Y" = (NO. OF CONDUCTORS - 1) X .050 [1.27]  
 "Z" = (NO. OF CONDUCTORS - 1) X .039 [.99]

## CABLE DETAIL

(Series 112, 113, 114)



## ORDERING INFORMATION


XX - XXXX - XXX

No. of conductors  
(see table)

Jumper series:  
112, 113, 114  
112X, 113X, 114X  
(see wiring table)

Cable length in inches:  
Ex: 3" = -.003- / 3.5" = -.003-.5-  
min. length = 3" [76.20mm]

## HEADER DETAIL

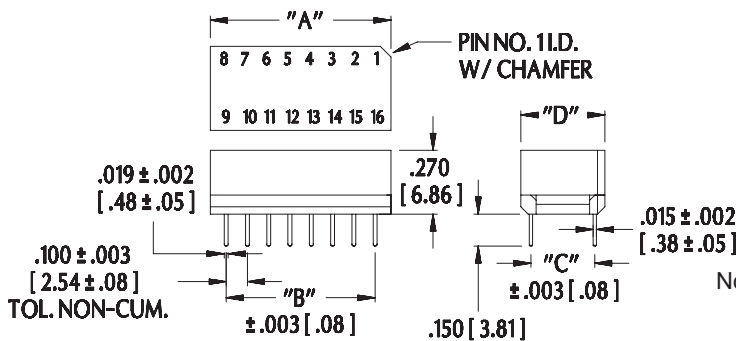

"A" = (NO. OF CONDUCTORS X .050 [1.27]) + .095 [2.41]  
 "B" = (NO. OF CONDUCTORS - 1) X .050 [1.27]  
 "X" = (NO. OF CONDUCTORS - 1) X .100 [2.54]

**ARIES**  
ELECTRONICS, INC.  
http://www.arieselec.com • info@arieselec.com

Bristol, PA USA  
TEL: (215) 781-9956  
FAX: (215) 781-9845



11009  
REV. E