TABLE 1

LETTER CODE	CABLE DIAMETER RANGE (APPROX.)	CABLE TYPES	REFERENCE CABLE GROUP	
			TOOL GRP	WIRING CRIMP
A	.070 / .110	RG 174, RG 180, RG 316, RG 178, HI7/SO DOC01	[illegible]	-5, -5A
I	.110 / .185	RG 180, AT&T 735A, [illegible] 8218, [illegible]	-006, -007, -020	-4, -22, -25
B	.160 / .215	RG-59-2, RG-59, RG 302, RG 303, HI7/178 DOC01, [illegible]	-011, -012	-1, -21
C	.150 / .230	RG-122, RG-141, RG-400, [illegible]	-011, -012	-1
D	.205 / .270	[illegible] RG-59A, RG-6, BELDEN 8212, AT&T 734A, [illegible]	-013, -017A, -019A, -017, -025	-2, -BD
E	.271 / .305	[illegible] 1/2, AT&T 720 AND AT&T 728	-016	-8
HF	.271 / .305	[illegible] FAMILY	-018	5
F ⚠	.300 / .450	RG-6, RG-11, RG-213, [illegible]	.....	-BA, -FB

TABLE 2

ITEM DESCRIPTION	PART NO.		
	NORTH & SOUTH AMERICA	EUROPE	UNITED KINGDOM
AC POWER CONVERTER	ACS-USA	ACS-EU	ACS-UK
AC CHARGER CORD FOR NI-CAD BATTERY	CTT-USA	[illegible]	[illegible]
AUTO 12V DC CHARGER CORD FOR NI-CAD BATTERY	[illegible]	N.A.	N.A.
EXTRA RAPID CHARGE BATTERY PACK [illegible]	[illegible]	[illegible]	[illegible]

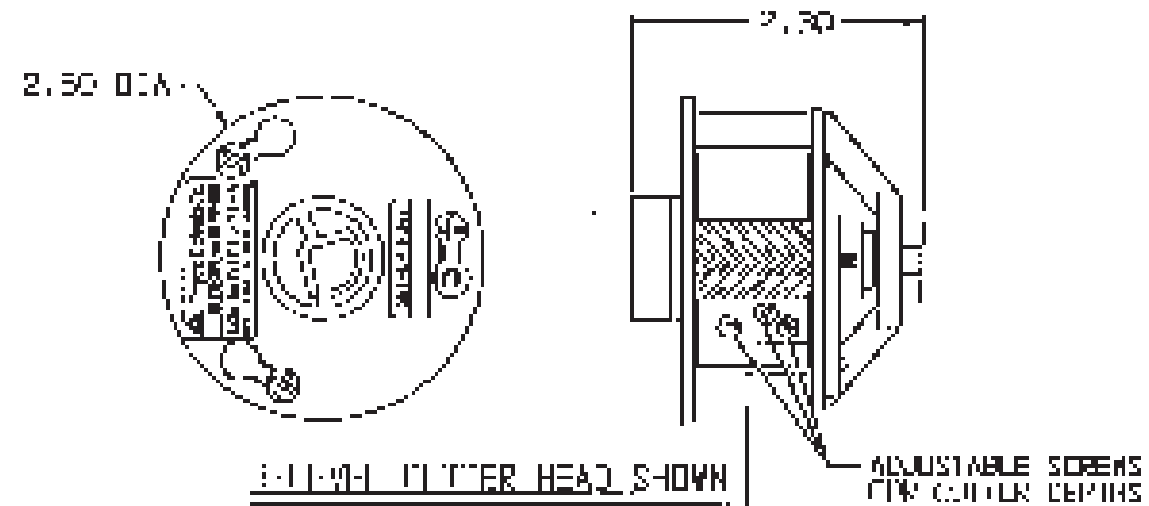

3-LEVEL CUTTER HEAD SHOWN

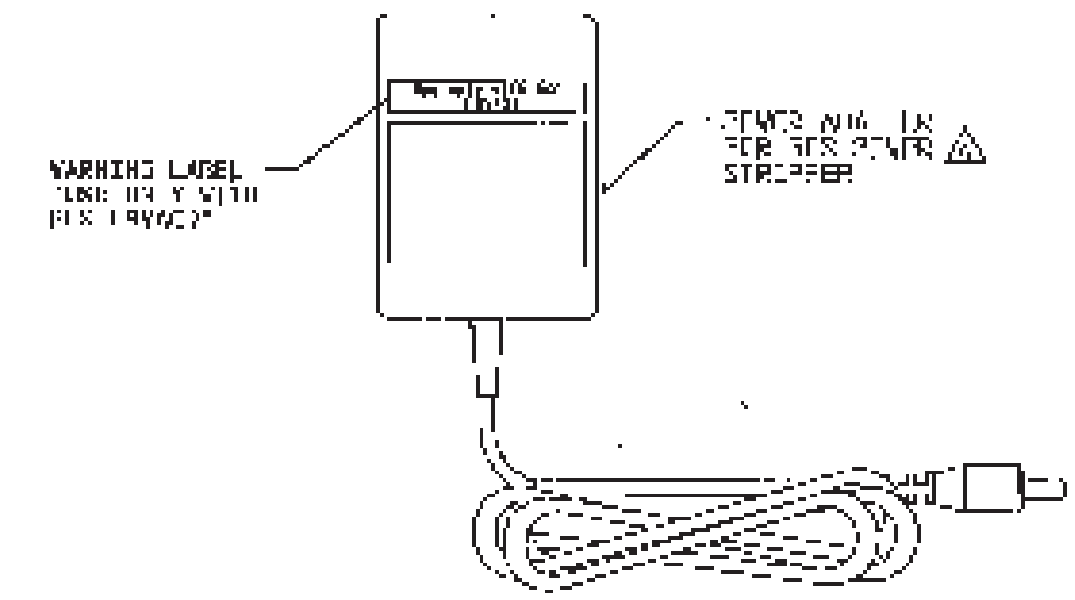

RED INDICATES ORIGINAL

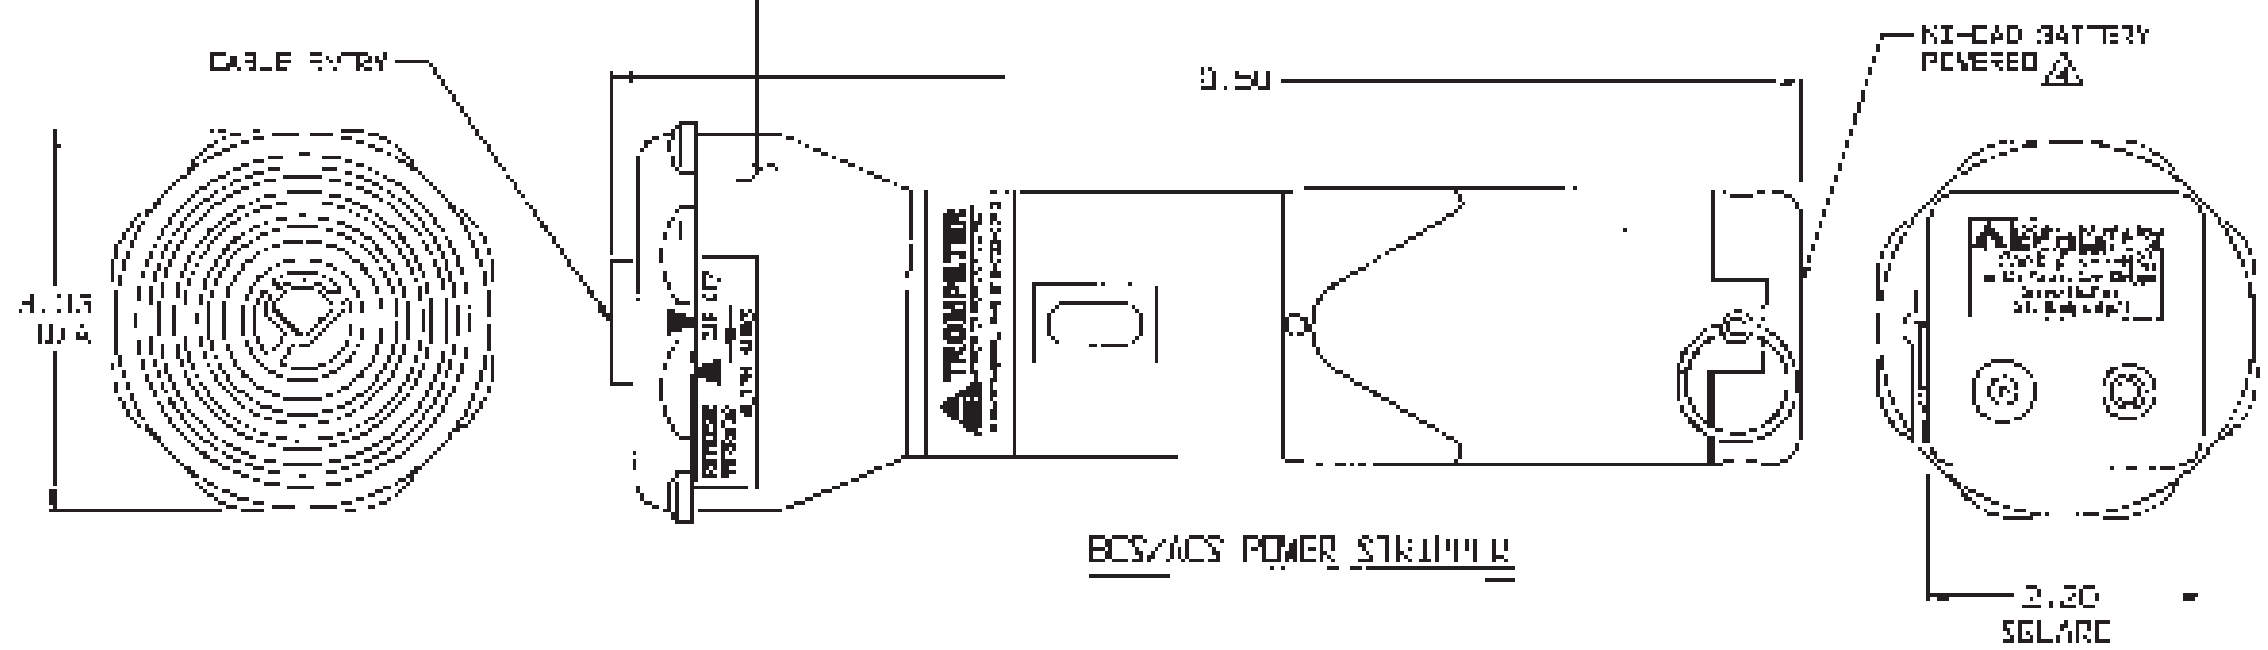

BCS/ACS POWER STRIPPER

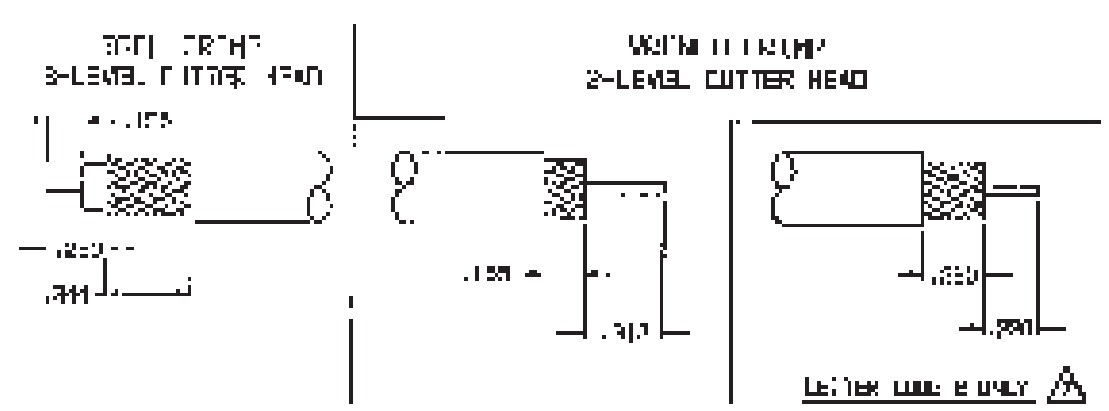

STRIPPING DIMENSIONS

SCALE: NONE

⚠ SEE SPECIAL STRIPPING DIMENSIONS

6. EACH ITEM MAY BE SOLD SEPARATELY

5. EACH KIT IS SUPPLIED WITH A 12.5 X 9.5 X 5.4 CARRYING CASE AND USER INSTRUCTIONS

⚠ INDIVIDUAL BATTERY OR OPTIONAL POWER SOURCE MAY BE ORDERED AS SHOWN PER TABLE 2

3. EXAMPLE OF COMPLETE ORDER NO.

BCS / C24T 3 A

- CABLE RANGE LETTER CODE (SEE TABLE 1)
- 3 = 3-LEVEL FOR TOOL CRIMP; 2 = 2-LEVEL FOR WIRING CRIMP
- CUTTER HEAD BASIC PART NO.
- POWER STRIPPER TOOL:

BCS = NI-CAD BATTERY WITH AC & DC CHARGER FOR NORTH & SOUTH AMERICA

BCCS = NI-CAD BATTERY WITH AC & DC CHARGER AND RAPID CHARGER FOR NORTH & SOUTH AMERICA

BCS-EU = NI-CAD BATTERY WITH AC & DC CHARGER FOR EUROPE

BCS-UK = NI-CAD BATTERY WITH AC & DC CHARGER FOR UNITED KINGDOM

ACS = AC POWER CONVERTER FOR NORTH & SOUTH AMERICA

ACS-EU = AC POWER CONVERTER FOR EUROPE

ACS-UK = AC POWER CONVERTER FOR UNITED KINGDOM

2. PORTABLE, HAND HELD, POWERED COAX CABLE STRIPPER KIT WITH AND WITHOUT CUTTER HEAD(S), WITH OPTIONAL POWER SOURCES, SEE TABLE 2

1. ALL DIMENSIONS IN INCHES

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
G	REVISED PER ECO 15174	6/10/06	MS

010-0093 | SH 1

TROMPETER RF connectivity

a cinch connectivity solutions brand

TITLE: BCS/ACS POWER STRIPPING TOOL

SIZE: A | CAGE CODE: 14949 | DRAWING NO.: 010-0093 | REV: G

SCALE: N/A | DATE: 10-18-93 | SHEET 1 OF 1

DRAWN 6/9/06 | CHECKED 6/7/06

NEXT ASSY