

10086534-X MM DD Y Y LF


—LEAD FREE

-OVERALL LENGTH IN CENTIMETER

- OVERALL LENGTH IN METER

EXAMPLE OF MM DD: 1.5M CABLE= 0150
5M CABLE= 0500

SIGNAL WIRE GAGE
N: 26 AWG

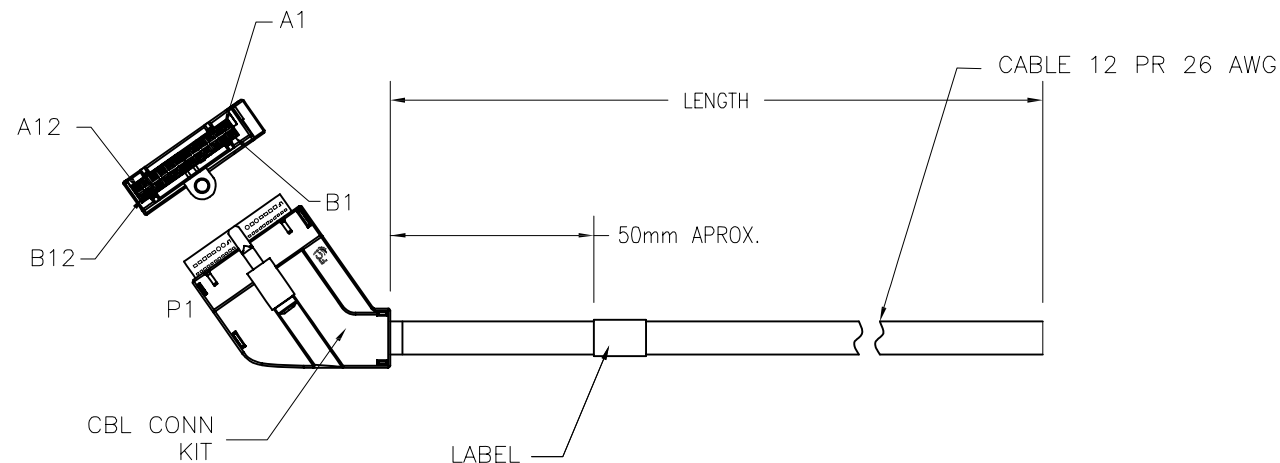

WIRING DIAGRAM

POS P1-P2	COLOR CODE	TWISTED PAIR
B1	BLUE	1
A2	WHITE	
B2	ORANGE	2
A1	WHITE	
B3	GREEN	3
A4	WHITE	
B4	BROWN	4
A3	WHITE	
B5	BLUE	5
A6	RED	
B6	ORANGE	6
A5	RED	
B7	GREEN	7
A8	RED	
B8	BROWN	8
A7	RED	
B9	BLUE	9
A10	BLACK	
B10	ORANGE	10
A9	BLACK	
B11	GREEN	11
A12	BLACK	
B12	BROWN	12
A11	BLACK	

NOTES:

1. ELECTRICAL TEST: CONTINUITY, HI POT TEST, RESISTANCE NO LESS THAN 2Mohms, 10mS.
2. PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE.
3. LABEL INFORMATION:
FCI
FCI PART NO.
DATE CODE
COUNTRY ORIGIN
4. TOLERANCES:
0-1 = $\pm 15\text{mm}$
1-10 = $\pm 2\%$
 $<10 = \pm 4\%$
5. PACKAGE PER GS-14-920 FOR LEAD FREE PACKAGING REQUIREMENTS.

[illegible]