

REVISIONS					
#	LYR	DESCRIPTION	DATE	DWN	APVD
	J	REVISED PER ECR-17-013000	30OCT2018	BDA	SG






1 0.00076 [.000030] MIN GOLD IN
LOCALIZED GOLD PLATE AREA AND 0.00254-0.00635
[.000100-.000250] BRIGHT TIN-LEAD
IN LOCALIZED TIN-LEAD PLATE AREA OVER 0.00127
[.000050] MIN NICKEL.

2 WIRE RANGE: 0.5-1.4MM² (20-16 AWG).

3 INSULATION RANGE: 2.01-3.20[.079-.126] DIA.

4 DIMENSIONS IN BRACKETS ARE IN INCHES.

5 0.00076 [.000030] MIN GOLD IN
LOCALIZED GOLD PLATE AREA AND 0.00254-0.00635
[.000100-.000250] BRIGHT TIN
IN LOCALIZED TIN PLATE AREA OVER 0.00127
[.000050] MIN NICKEL.

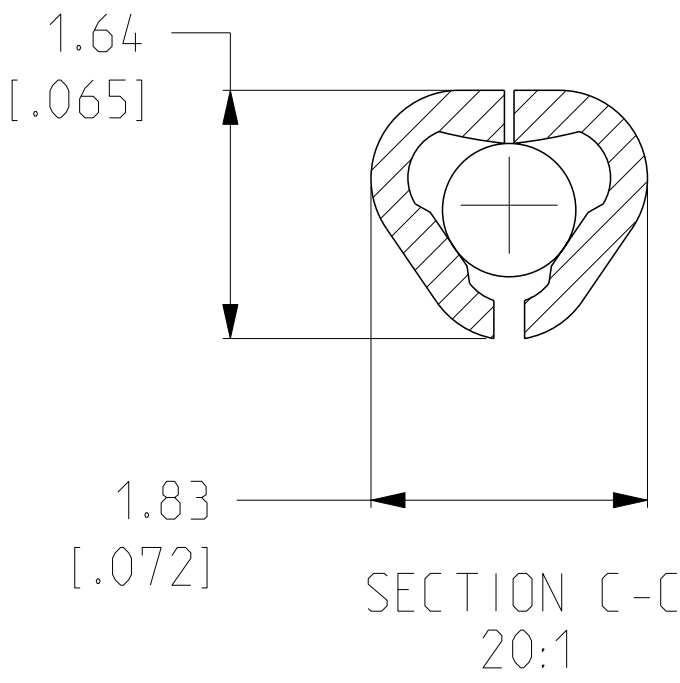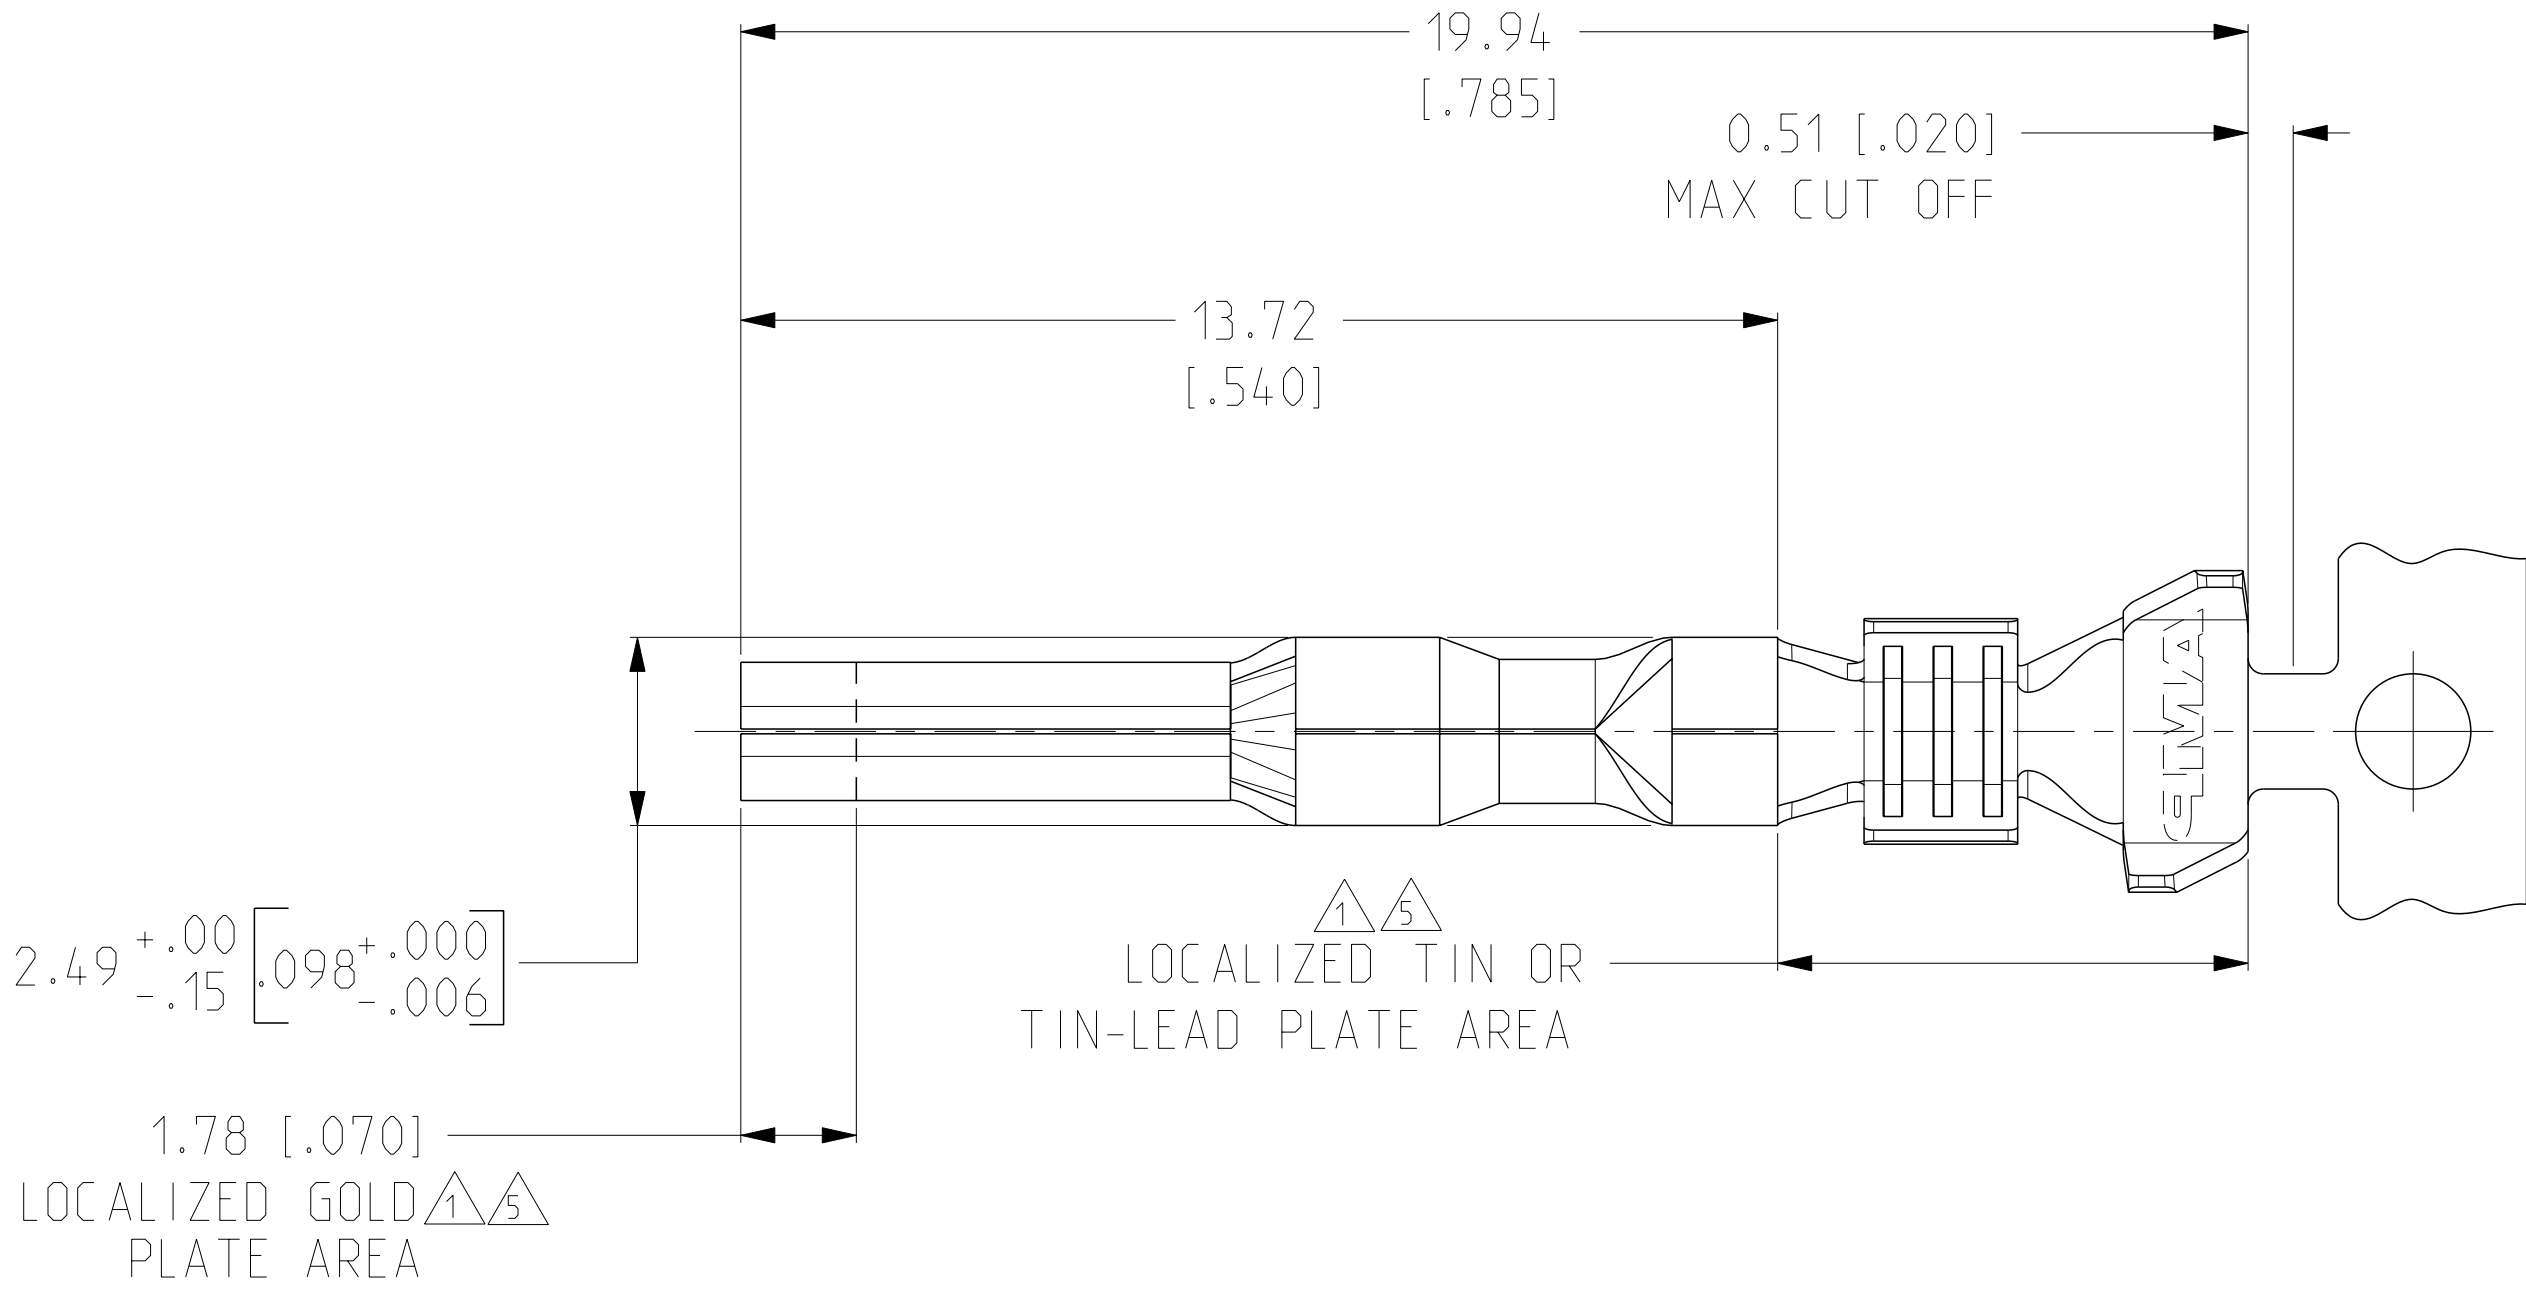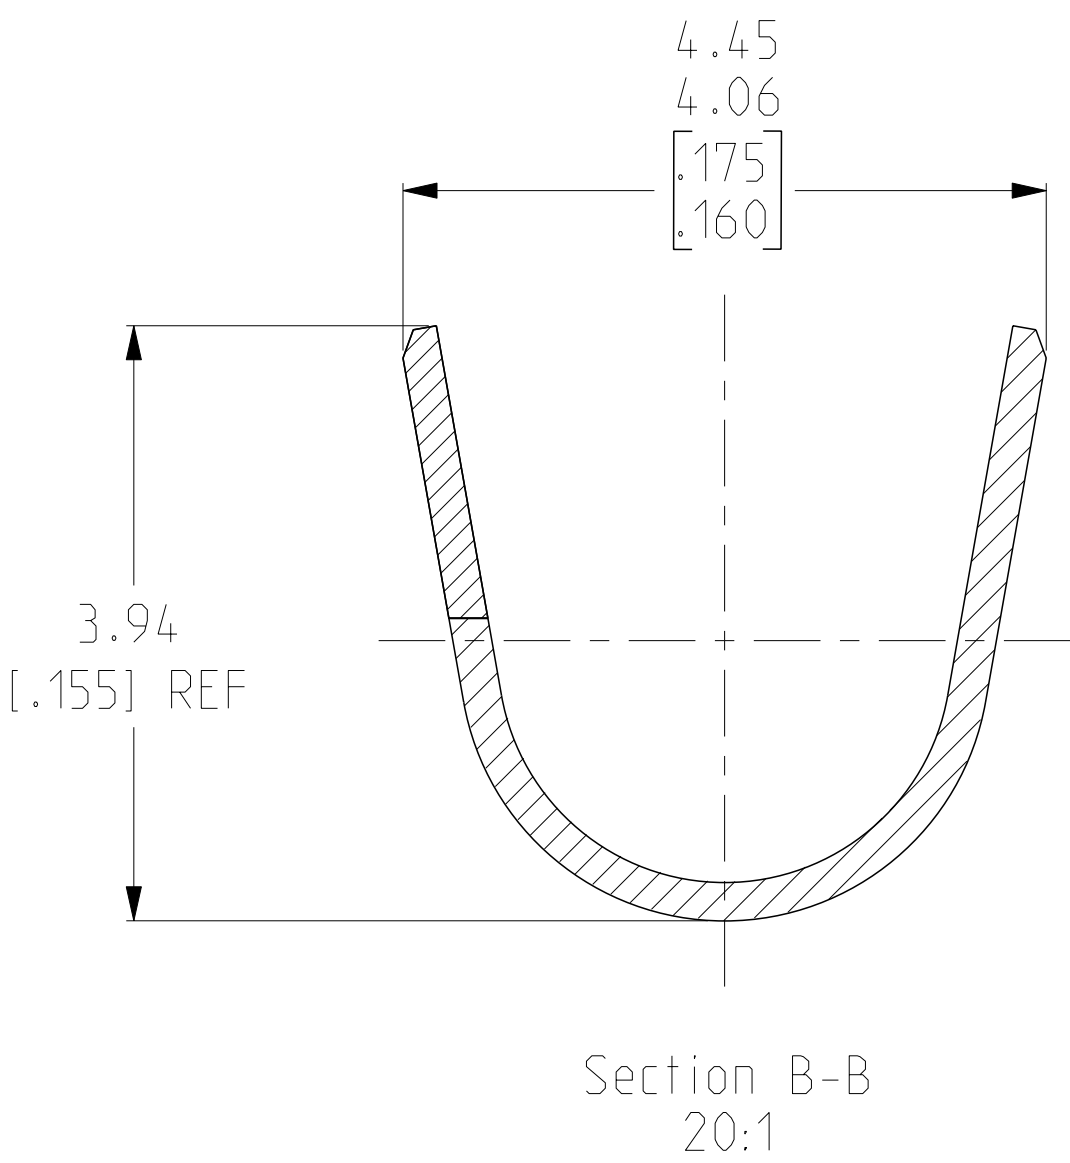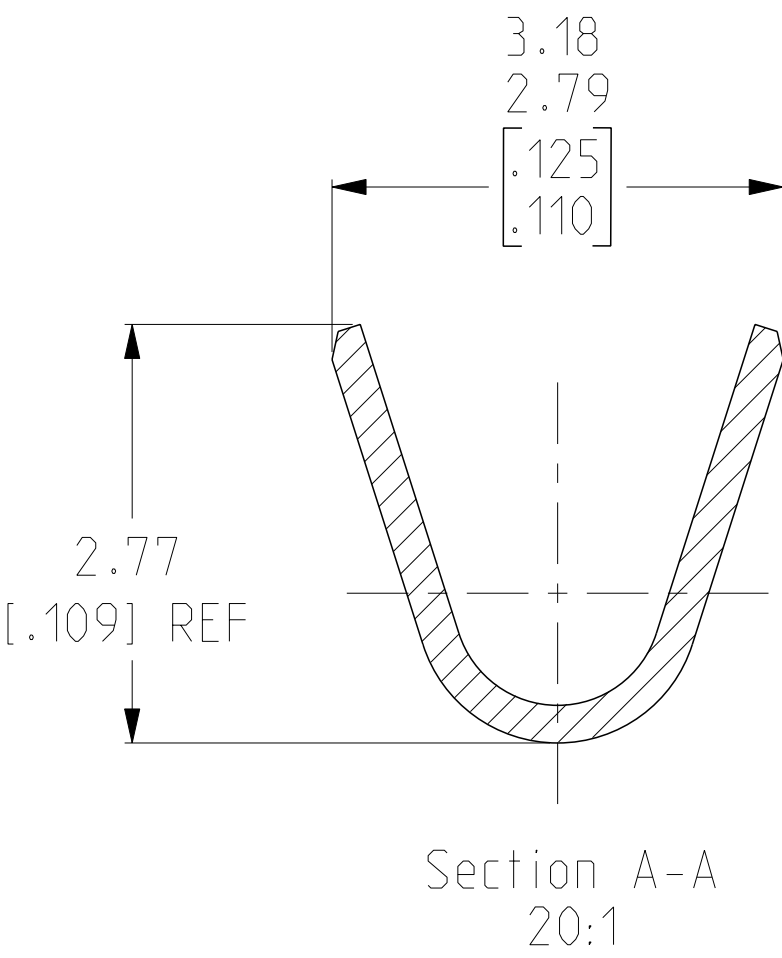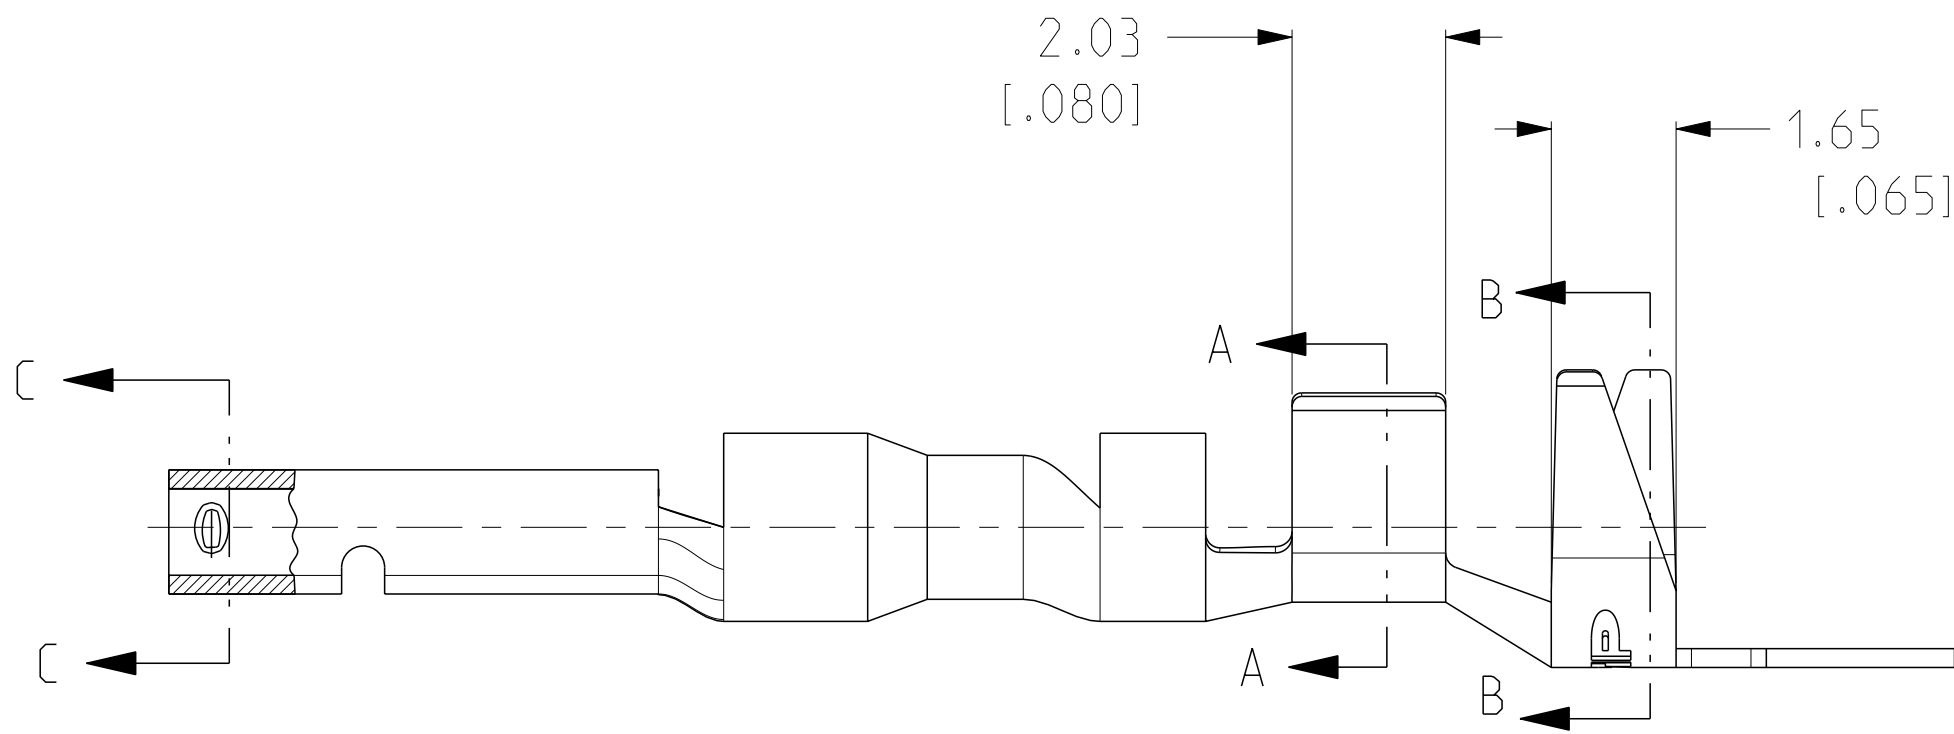

	MAKE FROM 794223-2	1-794223-0
	MAKE FROM 794223-2	794223-3
PRE TIN	.0098±.0004 X .970±.002 H06, 6-702456-6, BRASS, PER TE SPEC. 100-86	794223-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER 21MAY2003	TE Connectivity	
DIMENSIONS: mm		CM C. JONES 21MAY2003		
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.0030 [.012] 4 PLC ± ANGLES ±	APVD C. JONES 21MAY2003	NAME SOCKET, MINI UNIVERSAL MATE-N-LOK™2	
		PRODUCT SPEC	-	
		APPLICATION SPEC	-	
MATERIAL SEE TABLE	SEE TABLE	WEIGHT -	SIZE A1	CAGE CODE 00779
CUSTOMER DRAWING		DRAWING NO 794223	RESTRICTED TO -	
		SCALE 5:1	SHEET 1	OF 1
		REV J		