


LOC		DIST		REVISIONS			
F	LYR	DESCRIPTION		DATE	DWN	APVD	
	C	ECO-09-028526		04JAN2010	LAW	EW	

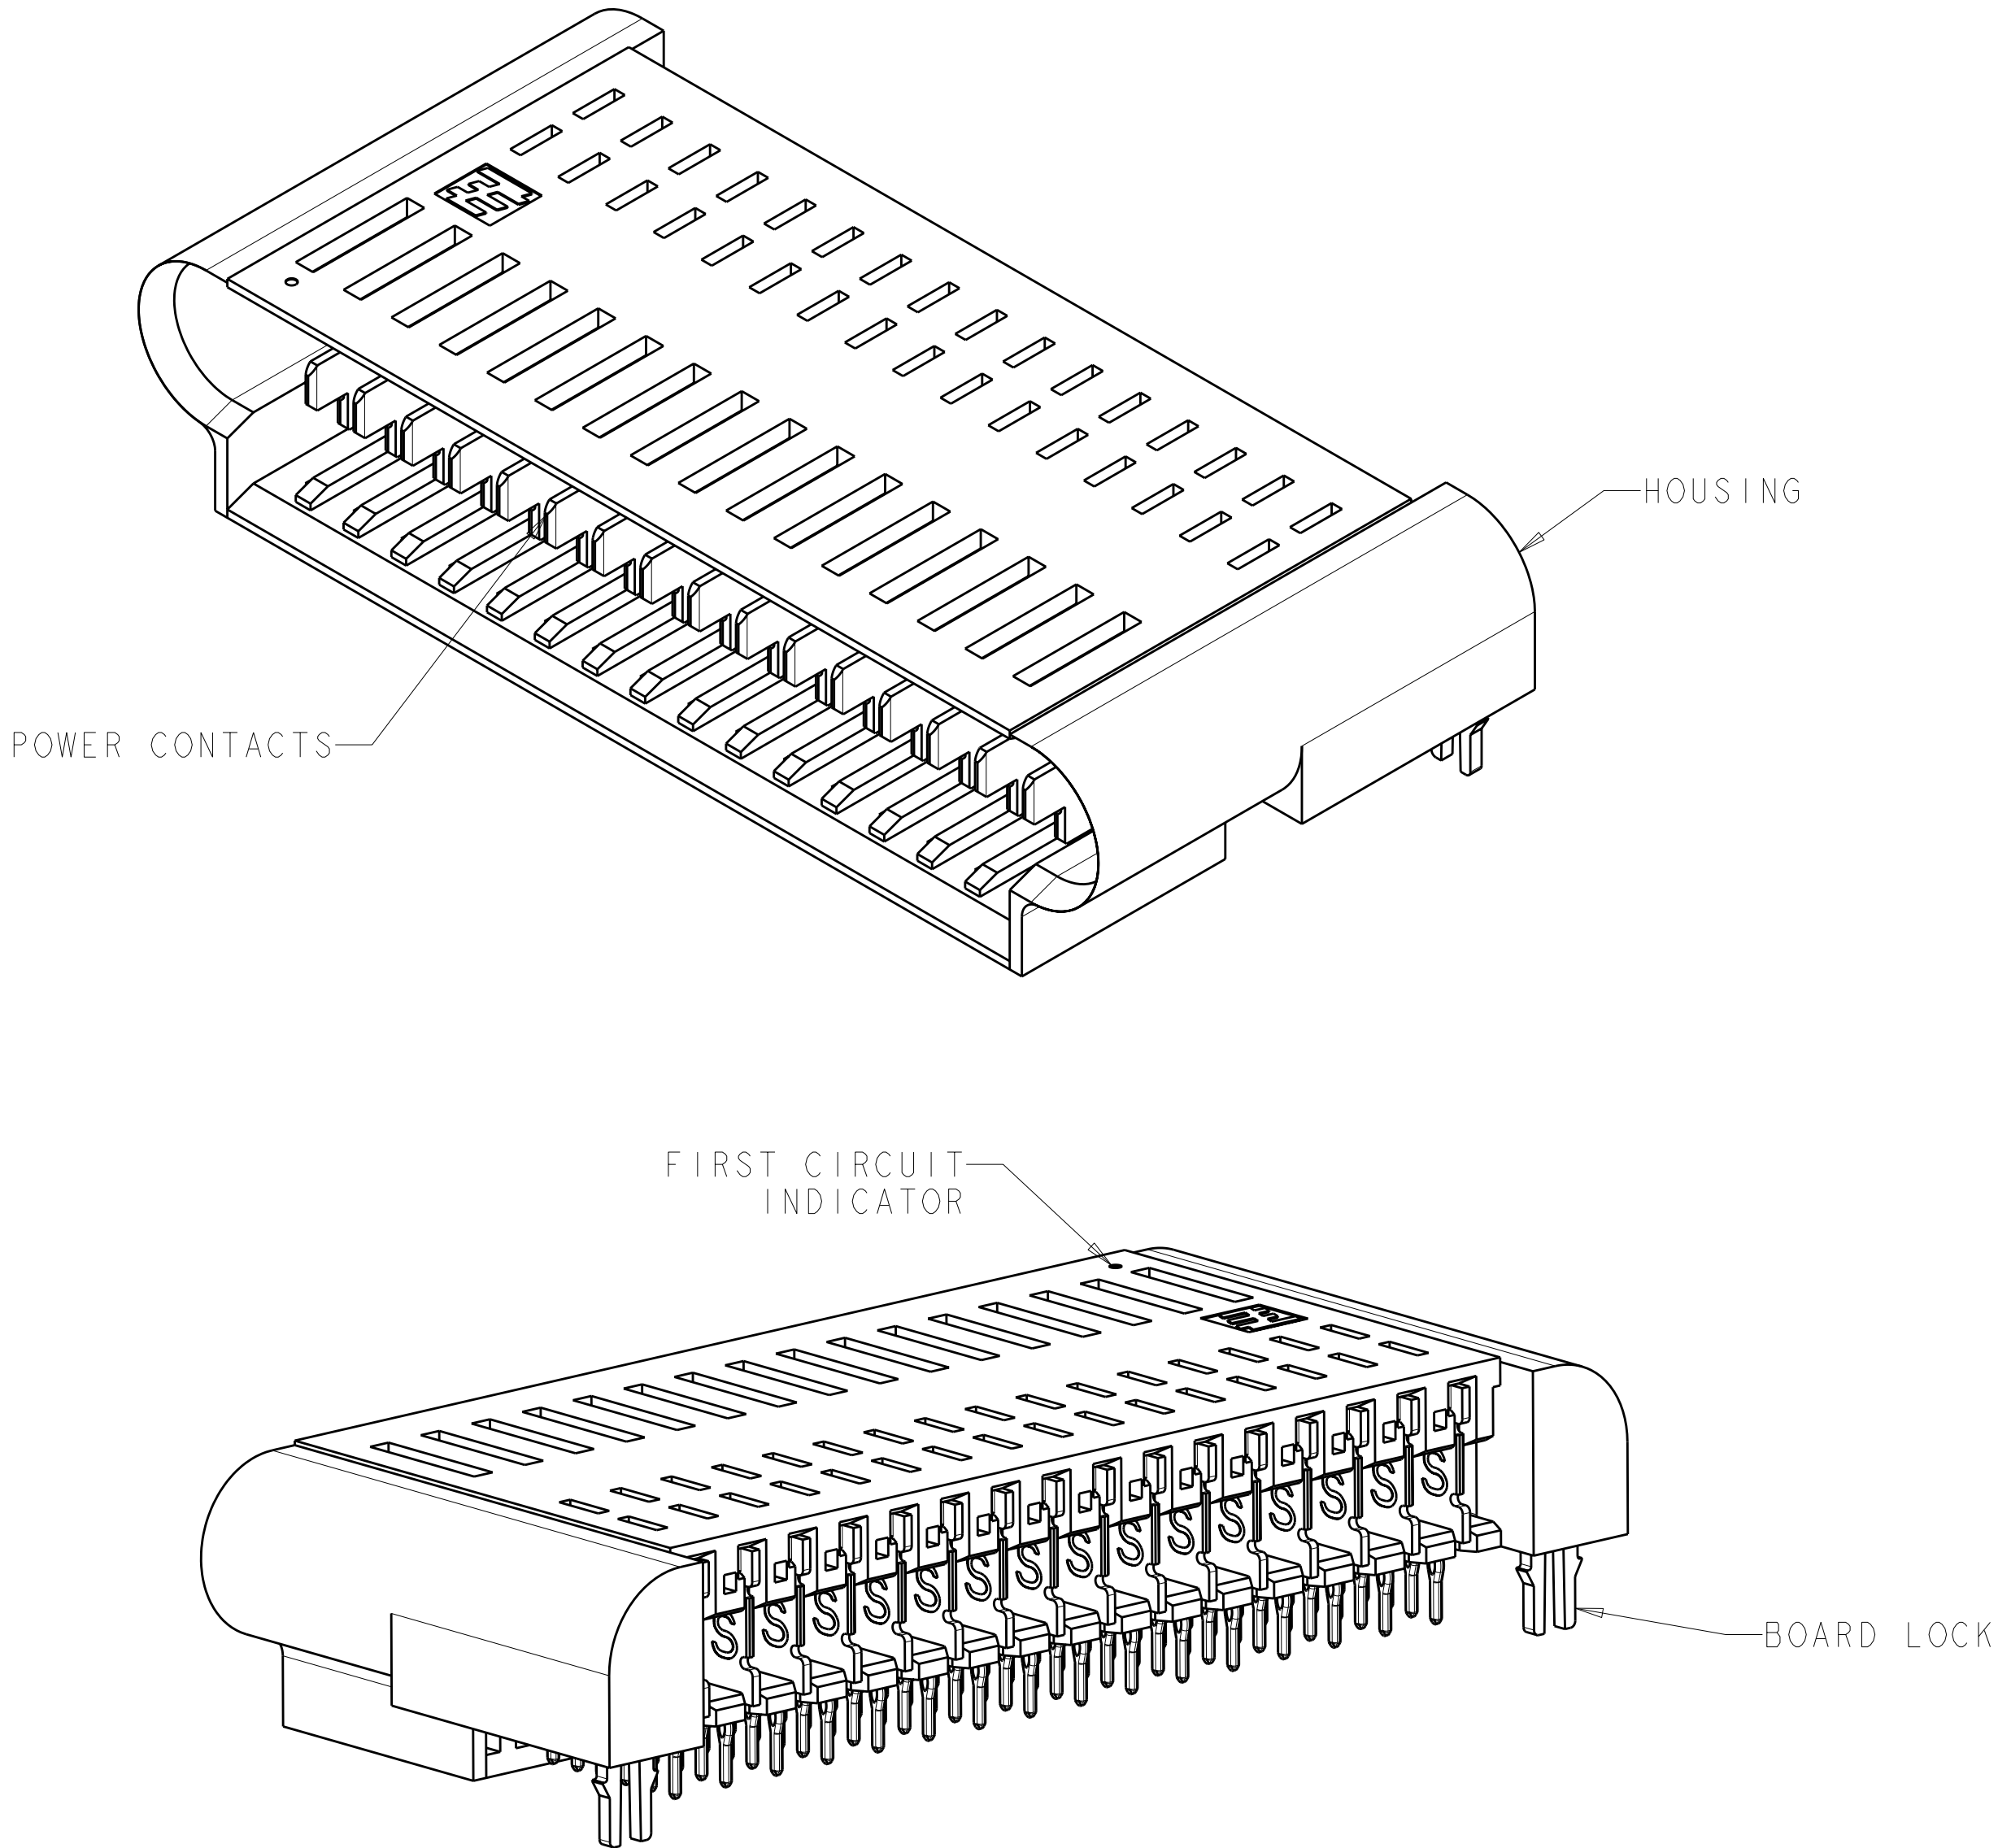

- HOUSING: GLASS FILLED LIQUID CRYSTAL POLYMER, COLOR: BLACK, UL 94 V-O RATED
POWER CONTACT: COPPER ALLOY
BOARD LOCK: PHOSPHOR BRONZE
- POWER CONTACT: 0.00127mm MIN NICKEL ALL OVER,
MATING AREA: 0.00076mm MIN GOLD OR
0.00008mm MIN GOLD OVER 0.00076mm MIN PALLADIUM-NICKEL,
TAIL AREA: 0.0005mm MIN MATTE TIN

BOARD LOCK: 0.00076mm MIN MATTE TIN OVER
0.00127mm MIN NICKEL.
- CONTACT MATING AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT,
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995





- 4 DATUMS AND BASIC DIMENSIONS TO BE ESTABLISHED BY CUSTOMER.
- 5 PC BOARD THICKNESS 1.4mm MIN, FOR WAVE SOLDER PC BOARD THICKNESS 2.62 MAX
- 6 SEE APPLICATION SPEC 114-13215 FOR PLATED THROUGH HOLE INFORMATION
7. SEE CUSTOMER DRAWING 1926711 OR 1926713 FOR MATING CONNECTOR
- 8 UNPLATED HOLES

1-1926710-6 SHOWN

180	29	88.60	93.71	30P	3-1926710-0
168	27	83.10	88.21	28P	2-1926710-8
156	25	77.60	82.71	26P	2-1926710-6
144	23	72.10	77.21	24P	2-1926710-4
132	21	66.60	71.71	22P	2-1926710-2
120	19	61.10	66.21	20P	2-1926710-0
108	17	55.60	60.71	18P	1-1926710-8
96	15	50.10	55.21	16P	1-1926710-6
84	13	44.60	49.71	14P	1-1926710-4
72	11	39.10	44.21	12P	1-1926710-2
60	9	33.60	38.71	10P	1-1926710-0
48	7	28.10	33.21	8P	1926710-8
36	5	22.60	27.71	6P	1926710-6
F PLC	D SPACES	DIM B	DIM A	NUMBER OF POSITIONS	PART NUMBER

1. THIS DRAWING IS THE PROPERTY OF TYCO ELECTRONICS. IT IS TO BE USED FOR THE MANUFACTURE OF TYCO ELECTRONICS PRODUCTS ONLY. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS.				DWN S. PETERS 18DEC2007		Tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK N. REESER 11APR2008		NAME PLUG ASSEMBLY, RIGHT ANGLE, PASSIVE GUIDE, POWER ONLY, WITH BOARD LOCKS, MINIPAK HDL		RESTRICTED TO -	
mm		9 PLC ± 1 PLC ± 3 PLC ±0.13 5 PLC ± 4 PLC ±		APVD N. REESER 11APR2008					
		FINISH		PRODUCT SPEC 108-2325					
		MATERIAL SEE NOTE 1		APPLICATION SPEC 114-13215					
				WEIGHT -		SIZE CAGE CODE DRAWING NO A100779C=1926710			
				CUSTOMER DRAWING		SCALE 2:1 SHEET 1 OF 2 REV C			

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AA	00	-	-	SEE SHEET I	-	-	-

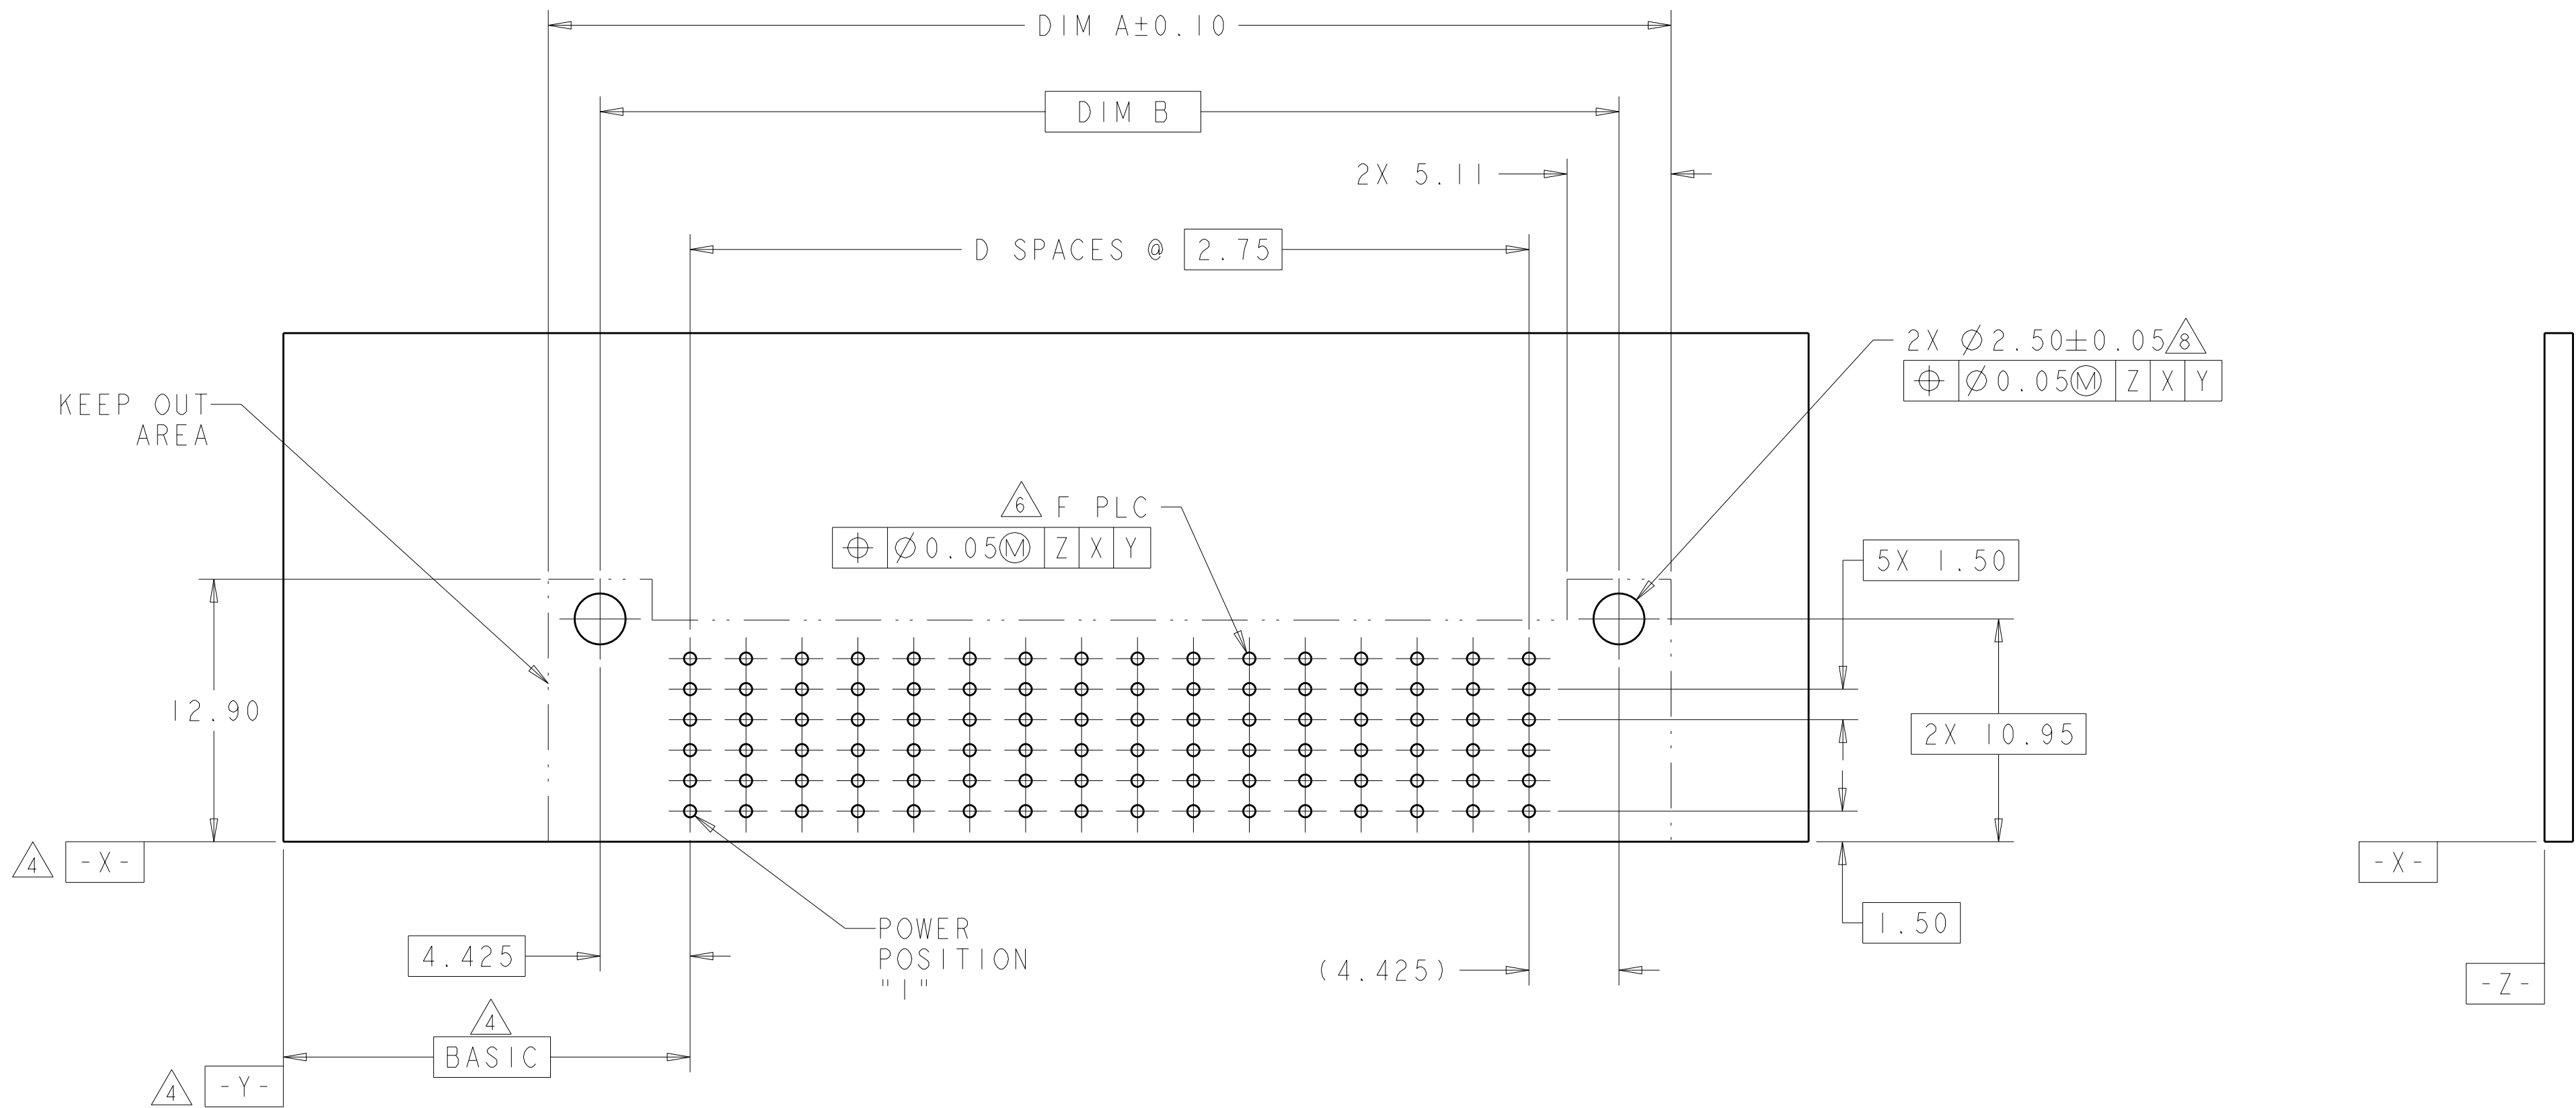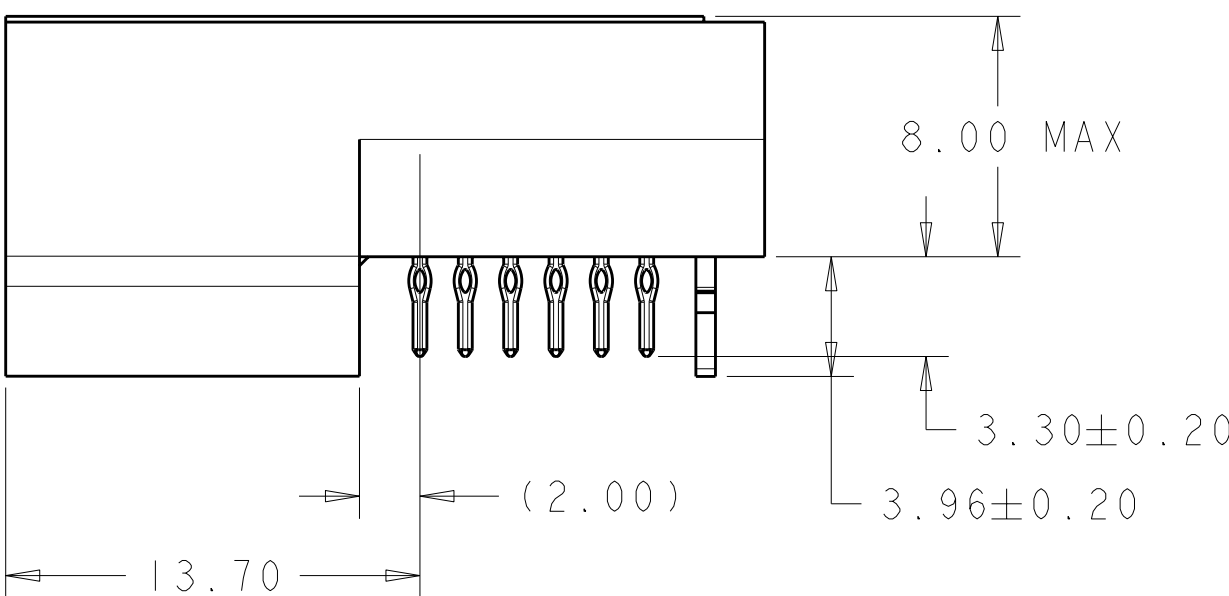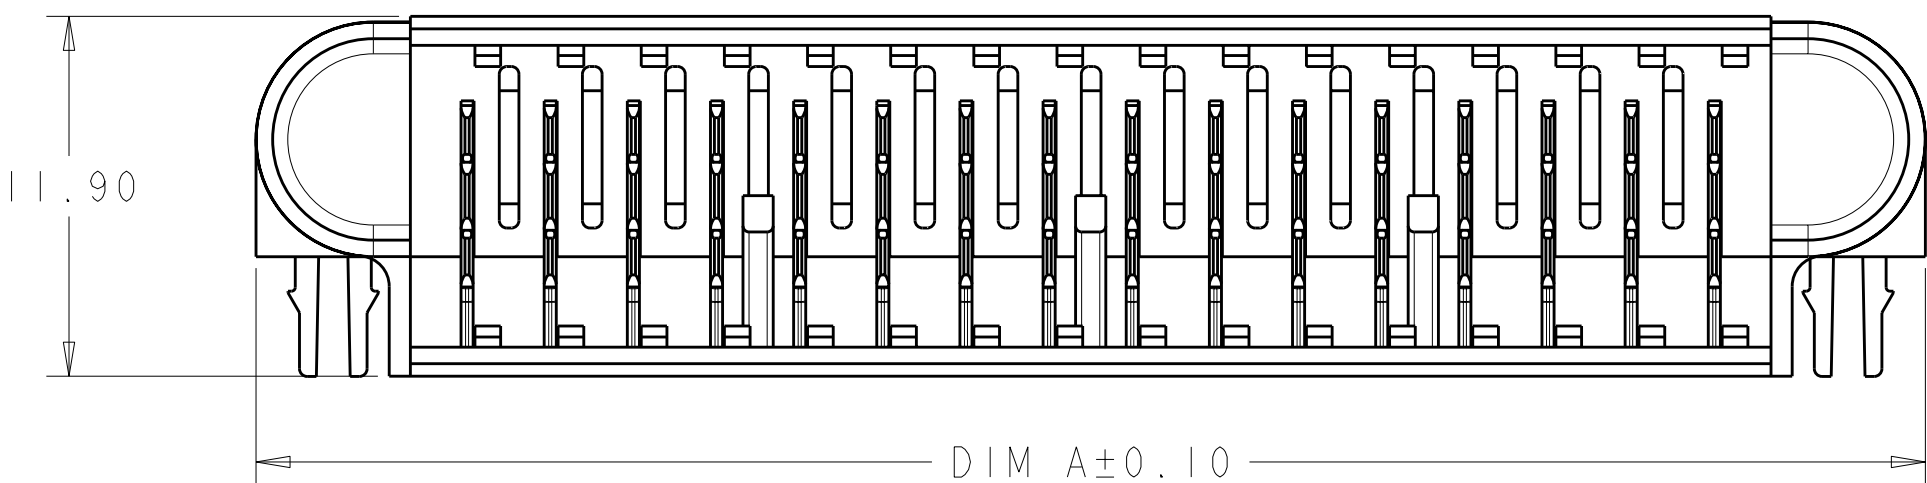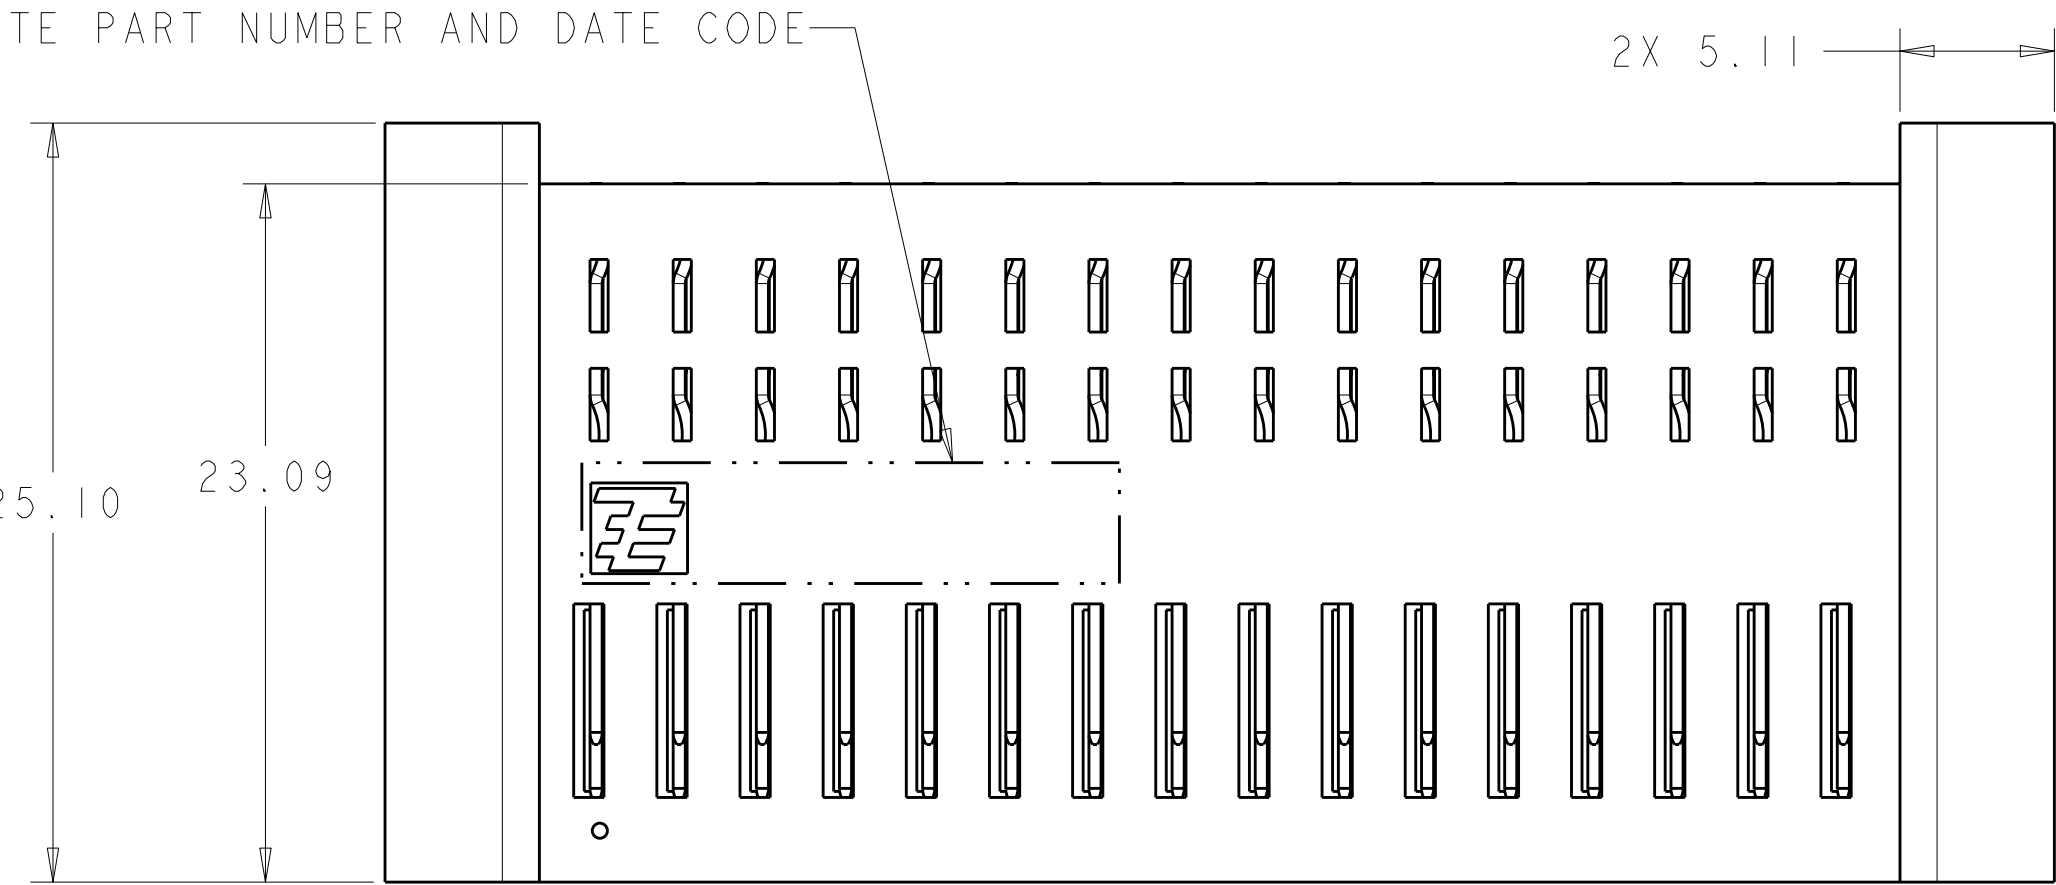

1-1926710-6 SHOWN

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT 5

(AS VIEWED FROM COMPONENT SIDE)

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THE DRAWING. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT PERMISSION IN WRITING FROM TYCO ELECTRONICS CORPORATION.		DWN S. PETERS	18DEC2007	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS:		CHK N. REESER	11APR2008	NAME	
mm		APVD N. REESER	11APR2008	PRODUCT SPEC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZE	
0 PLC		±		114-13215	
1 PLC		±		CAGE CODE	
2 PLC		±0.13		DRAWING NO	
3 PLC		±		RESTRICTED TO	
4 PLC		±		A100779C=1926710	
ANGLES		±		SCALE	
FINISH		SEE NOTE 2		2:1	
MATERIAL		SEE NOTE 1		SHEET	
CUSTOMER DRAWING		2		OF	
				2	
				REV	
				C	