
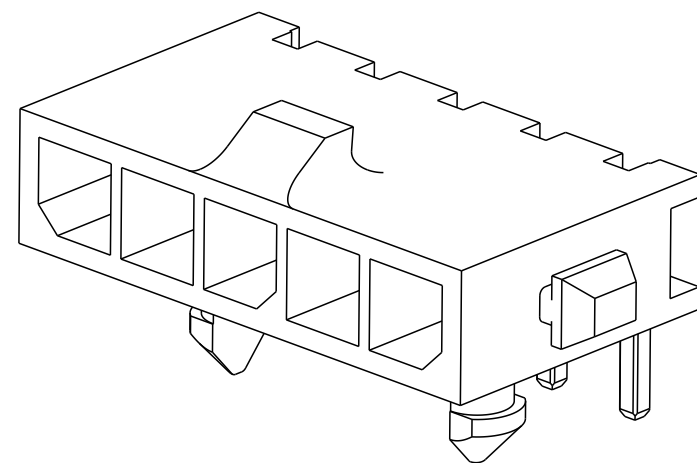
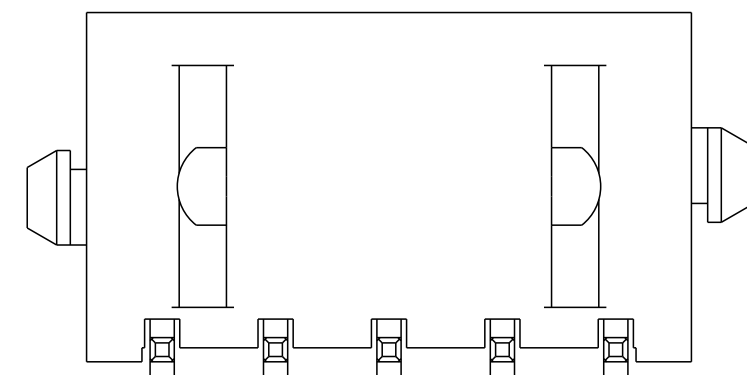


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.		

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A3	REVISED PER ECR-16-011494	30MAY2017	NK	CX

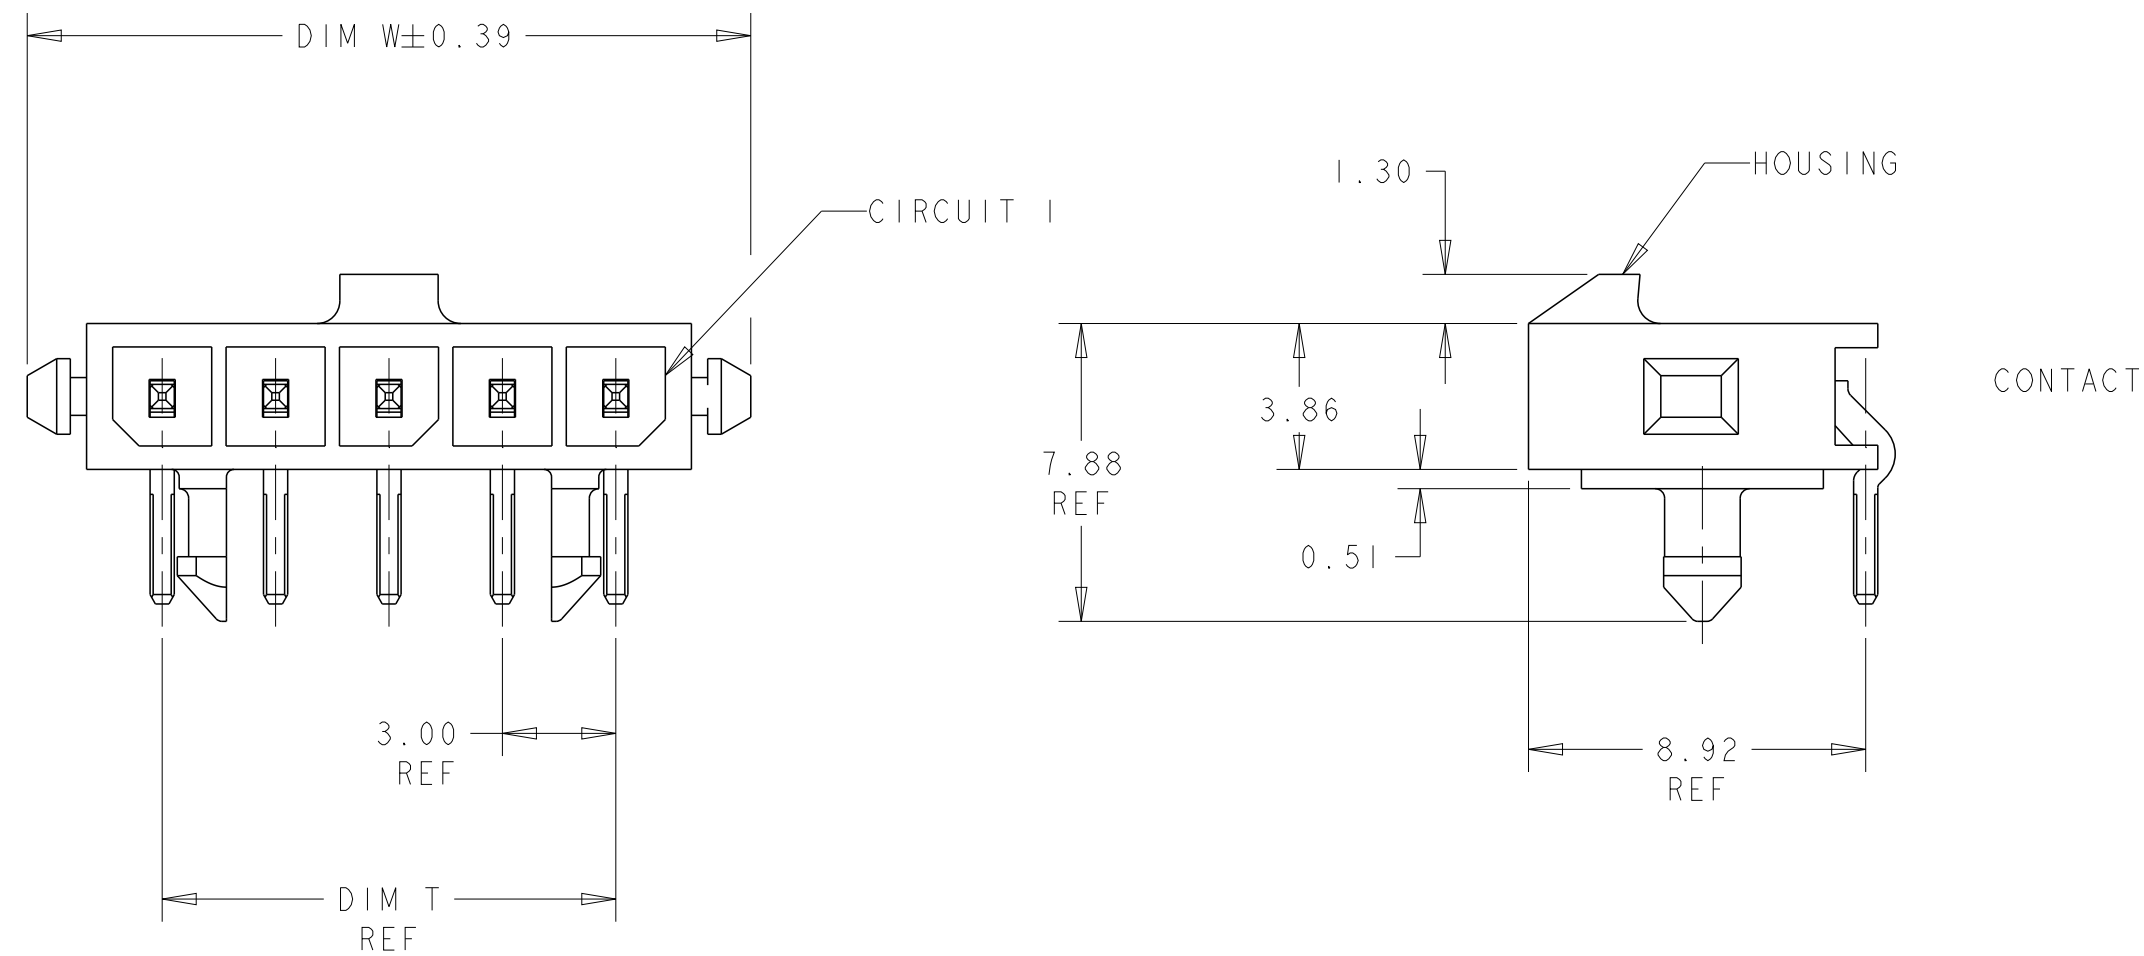

- 1 MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.
- 2 PLATING: CONTACTS - 0.76 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
- 3 DATUMS AND BASIC DIMENSIONS ARE ESTABLISHED BY CUSTOMER.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 5 PLATING: CONTACTS - 0.76 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.

		33.00	28.70	33.00	40.14	12	3-1445098-2
		30.00	25.70	30.00	37.14	11	3-1445098-1
		27.00	22.70	27.00	34.14	10	3-1445098-0
		24.00	19.70	24.00	31.14	9	2-1445098-9
		21.00	16.70	21.00	28.14	8	2-1445098-8
		18.00	13.70	18.00	25.14	7	2-1445098-7
		15.00	10.70	15.00	22.14	6	2-1445098-6
		12.00	7.70	12.00	19.14	5	2-1445098-5
		9.00	4.70	9.00	16.14	4	2-1445098-4
		-	-	6.00	13.14	3	2-1445098-3
		-	-	3.00	10.14	2	2-1445098-2
2		33.00	28.70	33.00	40.14	12	—1-1445098-2—
		30.00	25.70	30.00	37.14	11	—1-1445098-1—
0		27.00	22.70	27.00	34.14	10	—1-1445098-0—
9		24.00	19.70	24.00	31.14	9	—1445098-9—
8		21.00	16.70	21.00	28.14	8	—1445098-8—
7		18.00	13.70	18.00	25.14	7	—1445098-7—
6		15.00	10.70	15.00	22.14	6	—1445098-6—
5		12.00	7.70	12.00	19.14	5	—1445098-5—
4		9.00	4.70	9.00	16.14	4	—1445098-4—
3		-	-	6.00	13.14	3	—1445098-3—
2		-	-	3.00	10.14	2	—1445098-2—
	FINISH	DIM Z	DIM V	DIM T	DIM W	NO. OF POSN	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09OCT2000		 TE Connectivity	
		L ROOT 17-APR-2001 CHK K WHITAKER APVD C JONES 17-APR-2001			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH		NAME RIGHT ANGLE THRU HOLE HEADER ASSY, 0.76 MIC GOLD CONTACTS, W/PLASTIC™ HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK	
		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -			
MATERIAL  SEE TABLE		SIZE A2		CAGE CODE 00779	DRAWING NO C-1445098
		CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 2
				REV A3	

D


D

C


C

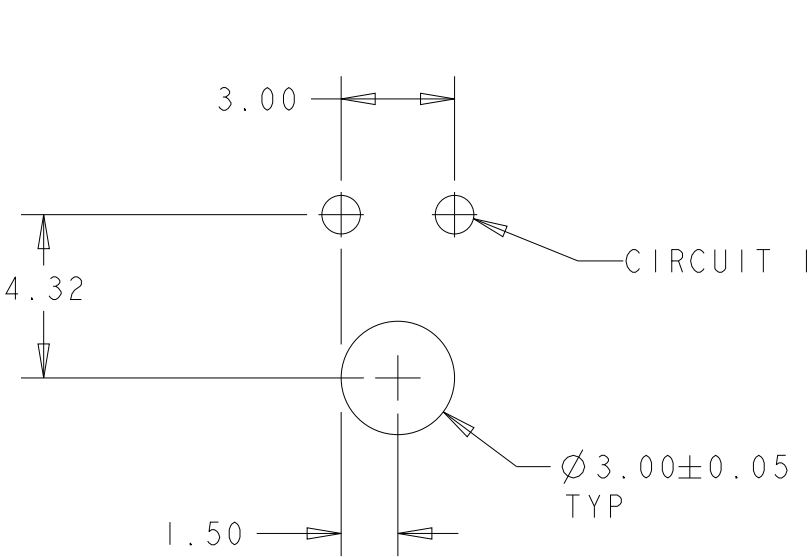

PCB LAYOUT FOR 2 POSITION 
COMPONENT SIDE

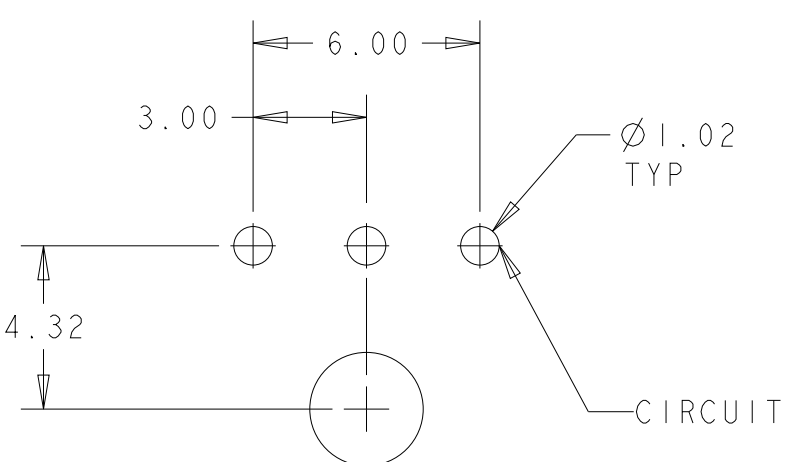

PCB LAYOUT FOR 3 POSITION 
COMPONENT SIDE

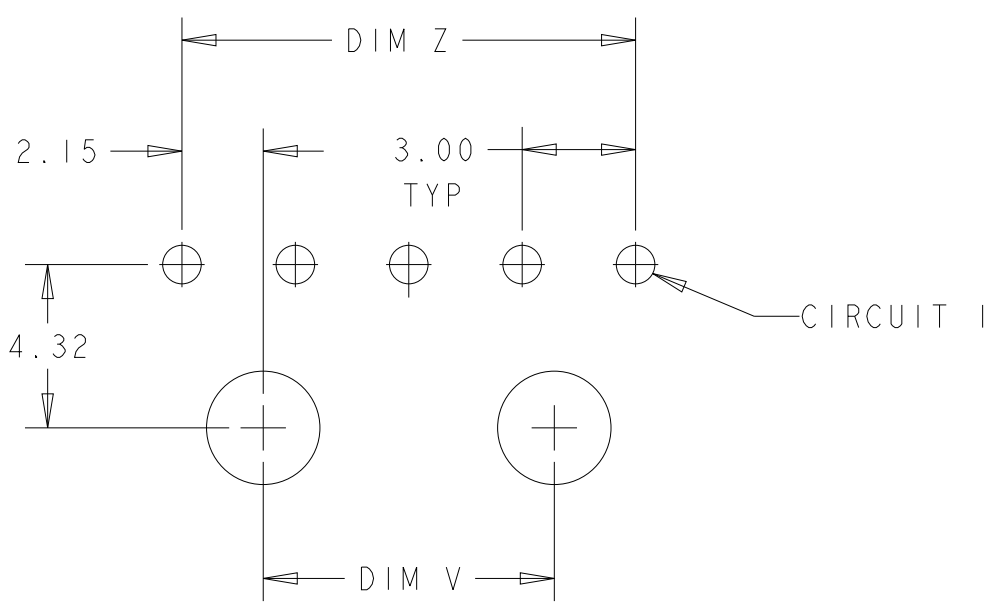

PCB LAYOUT FOR 4-12 POSITION 
COMPONENT SIDE

B

B

A

A

THIS DRAWING IS A CONTROLLED DOCUMENT.


DWN

J.ROOT

09OCT2000

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±-
2 PLC	±0.13
3 PLC	±-
4 PLC	±-
ANGLES	±-
FINISH	SEE TABLE

APVD

C. JONES

17-APR-2001

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

CHK

K. WHITAKER

17-APR-2001

NAME

RIGHT ANGLE THRU HOLE HEADER ASSY, 0.76 MIC GOLD CONTACTS, W/PLASTIC HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK

SIZE

A2

CAGE CODE

00779

DRAWING NO

1445098

RESTRICTED TO

-

SCALE

5:1

SHEET

2

OF

2

REV

A3

 TE Connectivity