
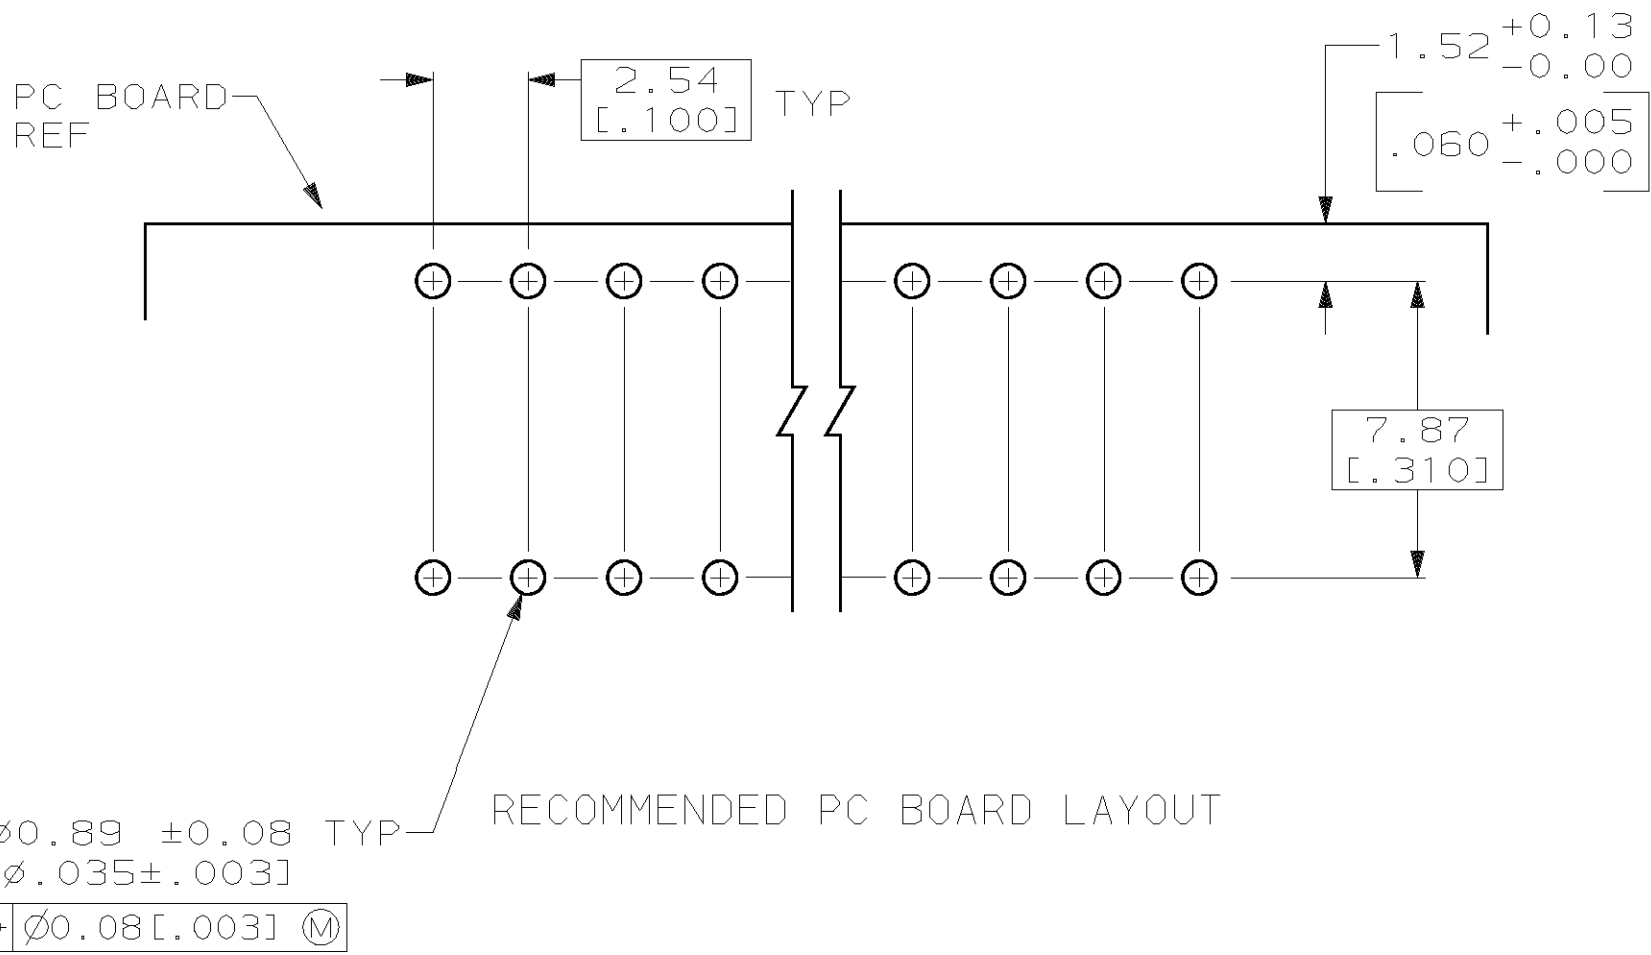
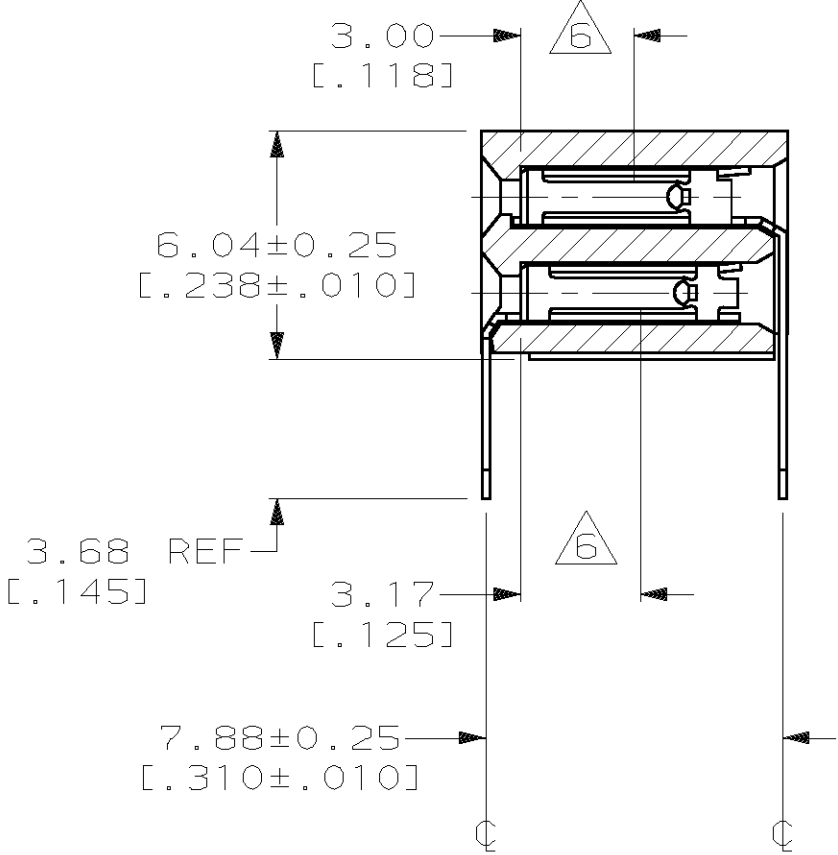
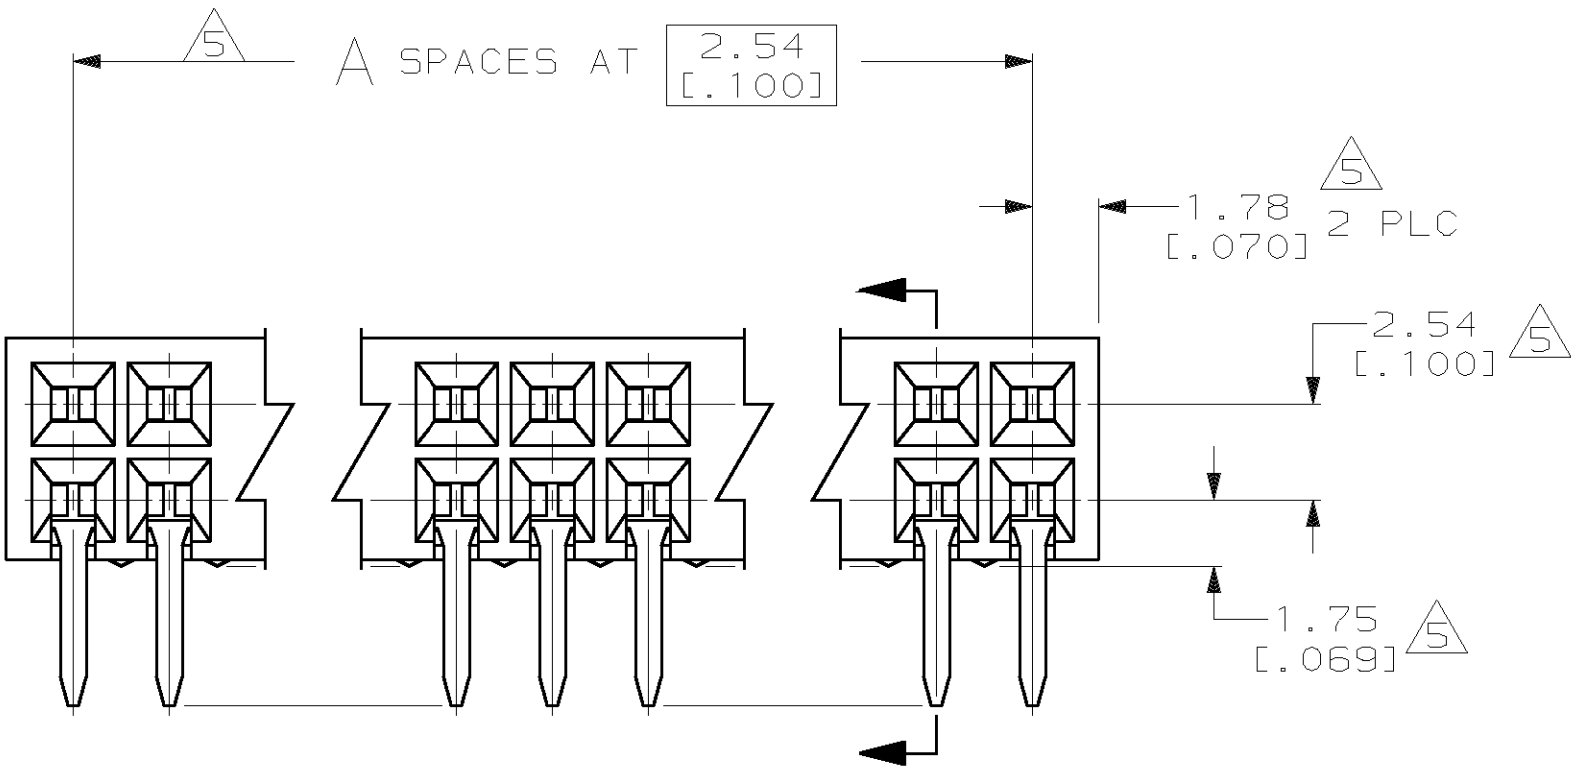


LOC DF	DIST Z0	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
				O	RELEASED		-	-
				A	REV PER AD6281		8/24/92	RB
				B	REV PER 0600-5131-96 TA		11-11-96	GA
				C	REV PER 0600-8506-99 JEB		02-00	DM

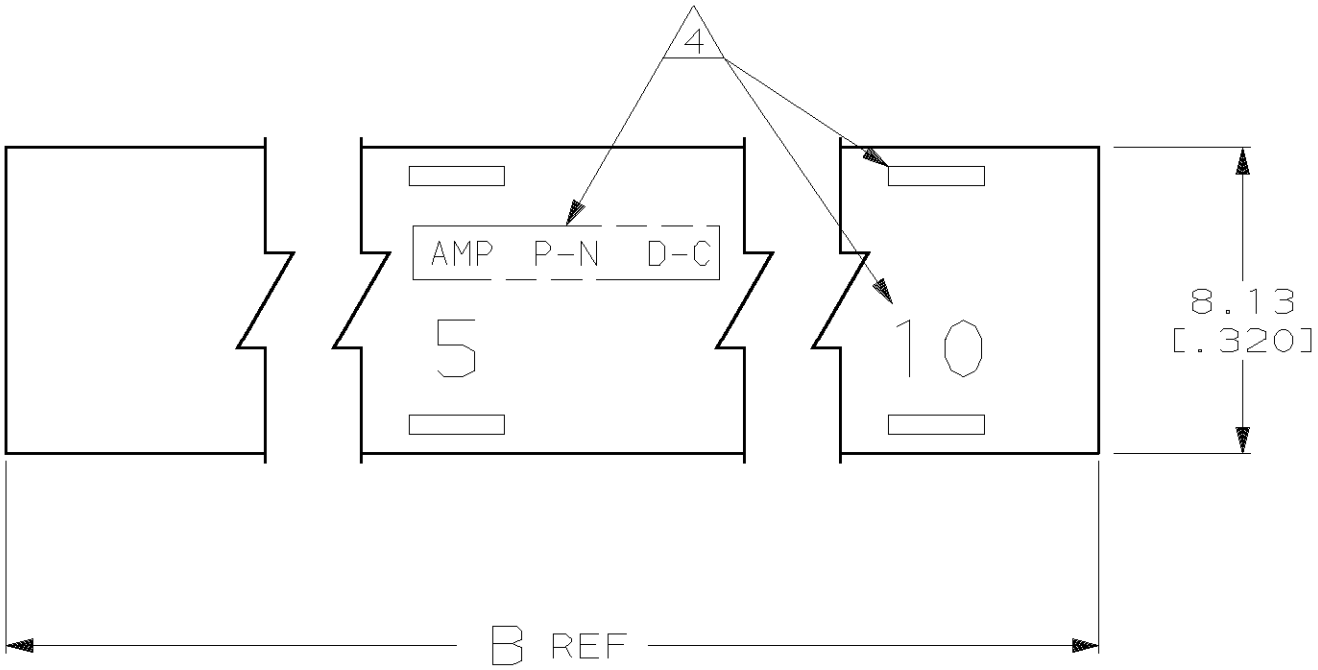

- 1 POLYPHENYLENE SULFIDE, GLASS-FILLED, COLOR-BROWN.
- 2 CONTACTS: PHOSPHOR BRONZE
- 3 .000050 GOLD OVER .000030 TO .000150 NICKEL ENTIRE CONTACT.
- 4 'AMP', PART NUMBER AND DATE CODE .062 ±.015 HIGH CHARACTERS IN APPROXIMATE AREA SHOWN. CAVITY IDENT. MARKED EVERY FIFTH CAVITY.
- 5 THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY--NOT TO CONTACT LOCATIONS.
- 6 POINT-OF-MEASUREMENT DIMENSION FOR PLATING THICKNESS (INSIDE CONTACT BEAMS).
- 7. TESTING : PER MIL-C-55302/128, GROUP A AND B, IN ADDITION TO MATING AND UNMATING FORCE PER MIL-STD-1344 METHOD 2013.

95.00 [3.740]	36	72	535986-2
79.76 [3.140]	30	62	535986-1
B	A	NO OF POSN	PART NUMBER

PART NO		
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± .005 ANGLES ± - MATERIAL HOUSING: 1 CONTACTS: 2 FINISH CONTACTS: 3		
DR 03/19/91 KATE HELM CHK 4/16/91 DIRK DIXON APPD 4/16/91 DIRK DIXON APPD 4/16/91 R.FELIX PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		
AMP INCORPORATED Harrisburg, Pa. 17105 NAME AMP MODU MOD II RECEPTACLE ASSEMBLY HORIZONTAL, .100¢ 2 ROW, CLOSED ENTRY, .145 SOLDER LEAD (.310¢), PHOSPHOR BRONZE CONTACTS, .000050 DUPLEX PLATING, PPS HOUSING		
SIZE C	FSCM NO 00779	DRAWING NO 535986
SCALE 5:1	SHEET 1 OF 1	