

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0877591014

Status:


Active

Overview:

Milli-Grid™ Connector System

Description:

Milli-Grid™ Header, Surface Mount, Vertical, 10 Circuits, 0.38µm Gold (Au) Selective Plating, without Press-fit Plastic Pegs, Lead-Free

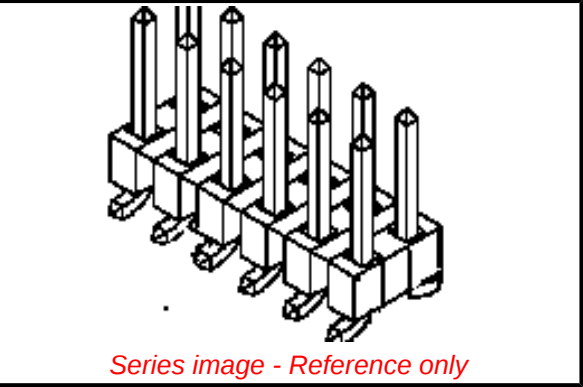

Series image - Reference only

Documents:

3D Model

Drawing (PDF)

Product Specification PS-87761-100 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

UL

E29179

General

Product Family

Series

Application

Overview

Product Name

UPC

PCB Headers

87759

Board-to-Board, Signal

Milli-Grid™ Connector System

Milli-Grid™

822348311187

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Glow-Wire Compliant

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Mated Height

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Rows

Orientation

PCB Locator

PCB Retention

Packaging Type

Pitch - Mating Interface

Pitch - Termination Interface

Plating min - Mating

Polarized to Mating Part

Polarized to PCB

Shrouded

Stackable

Temperature Range - Operating

Termination Interface: Style

Yes

10

10

Black

100

No

94V-0

No

No

None

None

3.80mm

Phosphor Bronze

Gold

Tin

Nylon

0.240/g

2

Vertical

No

None

Tube

2.00mm

2.00mm

0.381µm

No

No

No

No

-55°C to +105°C

Surface Mount

Electrical

Current - Maximum per Contact

Voltage - Maximum

2.0A

125V

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

87759 Series

Mates With

Milli-Grid™ Vertical Through Hole Receptacle [79107](#) , [78787](#) , Milli-Grid™ Flex-to-Board Vertical Receptacle [79108](#) , Milli-Grid™ Vertical Surface Mount Receptacle [79109](#) , [78788](#) , Milli-Grid™ Top Entry Surface Mount Receptacle [87381](#) , Milli-Grid™ Crimp Housing [51110](#)

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Product Specification	PS-87761-100
Sales Drawing	SD-87759-117

This document was generated on 08/18/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION