

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0781193010

Status:


Active

Overview:

FFC-FPC (SMT)

Description:

0.50mm Pitch Easy-On FFC/FPC Connector, Surface Mount, Vertical, Non-ZIF, Standard Footprint, Tin Bismuth Plating, Short Terminal Type, Black, 30 Circuits

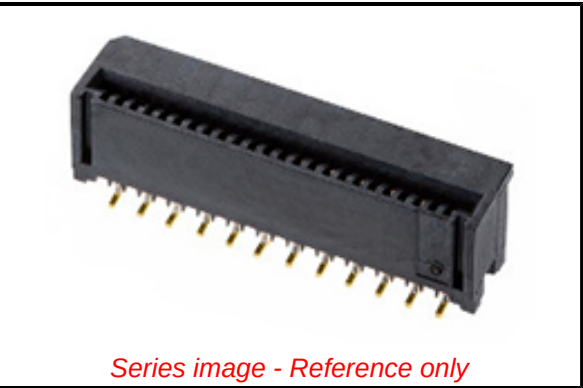

Documents:

3D Model

Drawing (PDF)

Product Specification 781190001-000 (PDF)

Packaging Specification 781199200-200 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
General	
Product Family	FFC/FPC Connectors
Series	78119
Overview	FFC-FPC (SMT)
Product Name	Easy-On
UPC	889056670920
Physical	
Actuator Type	Non-ZIF
Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Black
Contact Position	N/A
Durability (mating cycles max)	10
Mated Height	4.10mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Nickel, Tin-Bismuth
Material - Resin	Liquid Crystal Polymer
Net Weight	305.460/mg
Number of Rows	1
Orientation	Vertical
PCB Locator	No
PCB Mounting	Surface Mount
PCB Retention	None
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	0.50mm
Pitch - Termination Interface	0.50mm
Plating min - Mating	1.000µm
Polarized to PCB	No
Stackable	No
Temperature Range - Operating	-40° to +85°C
Wire/Cable Type	FFC/FPC
Electrical	
Current - Maximum per Contact	0.5A
Voltage - Maximum	50V AC (RMS)/DC
Material Info	
Reference - Drawing Numbers	
Packaging Specification	781199200-200
Product Specification	781190001-000
Sales Drawing	781190001-000, 781191001-000

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per -

ED/71/2019 (16 July

2019)

Halogen-Free

Status

Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

78119 Series

Mates With

Standard FFC/FPC Cables

This document was generated on 09/19/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION